

---

# **Androguard Documentation**

***Release 3.1.1***

**Anthony Desnos**

**Apr 27, 2018**



---

## Contents

---

<b>1 Documentation</b>	<b>3</b>
1.1 Introduction . . . . .	3
1.2 Tools . . . . .	4
<b>2 Python API</b>	<b>13</b>
2.1 androguard package . . . . .	13
<b>3 Indices and tables</b>	<b>127</b>
<b>Python Module Index</b>	<b>129</b>



Androguard is a full python tool to play with Android files.

- DEX, ODEX
- APK
- Android's binary xml
- Android resources
- Disassemble DEX/ODEX bytecodes
- Decompiler for DEX/ODEX files

You can either use the cli or graphical frontend for androguard, or use androguard purely as a library for your own tools and scripts.



# CHAPTER 1

---

## Documentation

---

### 1.1 Introduction

#### 1.1.1 Installation

There are several ways how to install androguard.

Before you start, make sure you are using a supported python version! Although androguard should run with python 2.7.x, we highly recommend a newer version like python 3.6! For Windows, we recommend using the Anaconda python 3.6.x package.

#### PIP

The usual way to install a python packages is by using [pypi.python.org](https://pypi.python.org) and it's package installer *pip*. Just use

```
$ pip install -U androguard
```

to install androguard.

You can also make use of an *virtualenv*, to separate the installation from your system wide packages:

```
$ virtualenv venv-androguard
$ . venv-androguard/bin/activate
$ pip install -U androguard
```

pip should install all required packages too.

#### Debian / Ubuntu

Debian has androguard in its repository. You can just install it using `apt install androguard`. All required dependencies are automatically installed.

### Install from Source

Use git to fetch the sources, then install it. Please install git and python on your own. Beware, that androguard requires python 2.7 or at least 3.3 to work. Pypy >= 5.9.0 should work as well but is not tested. On Windows, there might be some issues with the magic library. Usually the Anaconda suite works fine!

```
$ git clone --recursive https://github.com/androguard/androguard.git  
$ cd androguard  
$ pip install .[magic]
```

if you like to install the GUI as well, use

```
$ pip install .[magic,GUI,graphing]
```

The dependencies, defined in `setup.py` will be automatically installed.

If you are installing the libraries using `pip`, make sure you download the correct packages. For example, there are a lot of implementations of the `magic` library. Get the one, that is shipped with the file command (See [Fine Free File Command](<http://www.darwinsys.com/file/>) or use `filemagic`, which should work as well.

### 1.1.2 Getting Started

The easiest way to analyze APK files, is by using `androlyze.py`. It will start a iPython shell and has all modules loaded to get into action.

Open a terminal and type `androlyze.py -s`.

For analyzing and loading APK or DEX files, some wrapper functions exists. Use `AnalyzeAPK(filename)` or `AnalyzeDEX(filename)` to load a file and start analyzing:

```
a, d, dx = AnalyzeAPK("/home/user/some-app.apk")
```

The three objects you get are a an `androguard.core.bytecodes.apk.APK` object, d an array of `androguard.core.bytecodes.dvm.DalvikVMFormat` object and dx an `androguard.core.analysis.analysis.Analysis` object.

Inside the APK object, you can find all information about the APK, like package name, permissions, the `AndroidManifest.xml` or its resources.

The `androguard.core.bytecodes.dvm.DalvikVMFormat` corresponds to the DEX file found inside the APK file. You can get classes, methods or strings from the DEX file.

The `androguard.core.analysis.analysis.Analysis` object contains special classes, which link information about the `classes.dex`.

## 1.2 Tools

There are several tools, which gives you the option to do certain tasks directly from the commandline. An exception is `androlyze`, which spawns an IPython shell and let you use the androguard API interactively.

### 1.2.1 androlyze - Androguard Shell

`androlyze` is a tool that spawns an IPython shell.

```

usage: androlyze.py [-h] [--shell] [--debug] [--ddebug] [--no-session]
                     [--version]
                     [apk]

Open a IPython Shell and start reverse engineering

positional arguments:
  apk                  Start the shell with the given APK. a, d, dx are
                       available then. Loading might be slower in this case!

optional arguments:
  -h, --help            show this help message and exit
  --shell, -s           Will do nothing, this argument is just here for your
                       convenience
  --debug, -d, --verbose
                       Print log messages
  --ddebug, -dd, --very-verbose
                       Print log messages (higher verbosity)
  --no-session          Do not start an Androguard session
  --version, -v          Print the Androguard Version and exit

```

## 1.2.2 androcg - Create Call Graph from APK

androcg can create files that can be read using graph visualization software, for example gephi.

### Synopsis

```


Traceback (most recent call last):
  File "../androcg.py", line 6, in <module>
    import matplotlib.pyplot as plt
ImportError: No module named 'matplotlib'

```

### Examples

The call graph is constructed from the `Analysis` object and then converted into a networkx *DiGraph*. Note that calls between methods are only added once. Thus, if a method calls some other method multiple times, this is not saved.

The methods to construct the callgraph from can be filtered. It is highly suggested to do that, as call graphs can get very large:

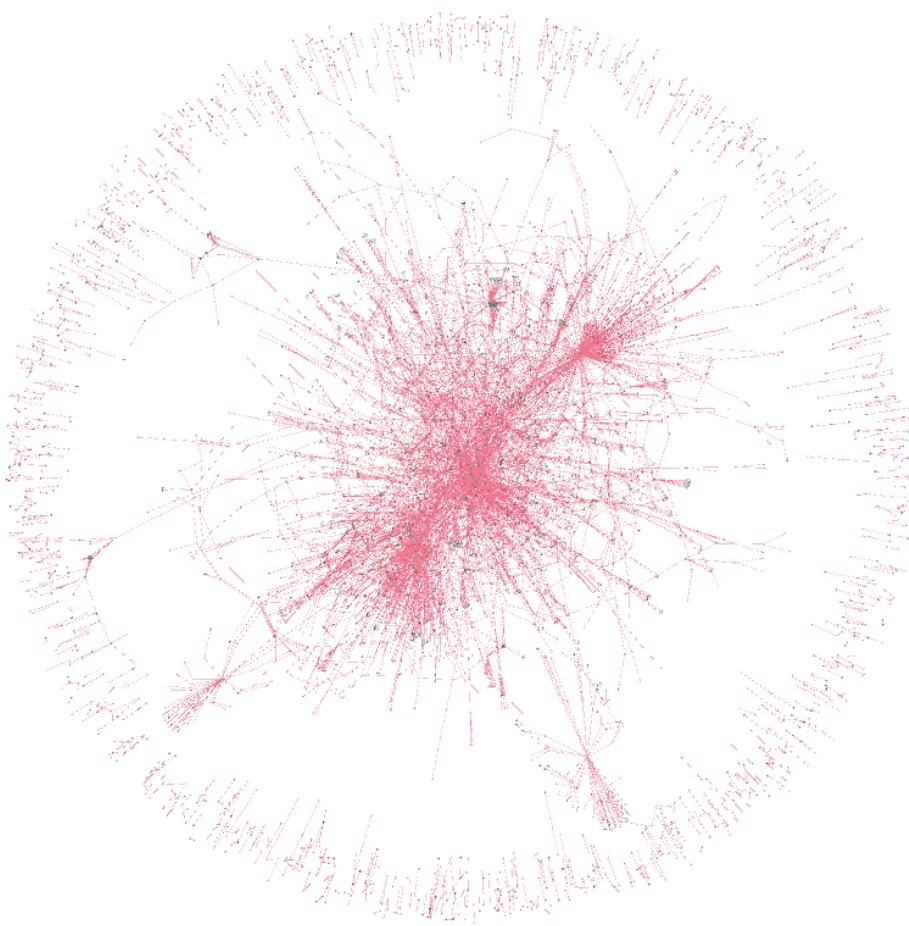

Of course, you can export the call graph with androguard and filter it later.

Here is an example of an already filtered graph, visualized in [gephi](#). Each node has an attribute to indicate if it is an internal (defined somewhere in the DEXs) or external (might be an API, but definitely not defined in the DEXs) method. In this case all green nodes are internal and all red ones are external. You can see the calls of some SMS Trojan to the API methods to write SMS.



### 1.2.3 androgui - Androguard GUI

```
usage: androgui.py [-h] [-d] [-i INPUT_FILE] [-p INPUT_PLUGIN]

Androguard GUI

optional arguments:
  -h, --help            show this help message and exit
  -d, --debug
  -i INPUT_FILE, --input_file INPUT_FILE
  -p INPUT_PLUGIN, --input_plugin INPUT_PLUGIN
```

### 1.2.4 androsign - Print Certificate Fingerprints

Get the fingerprints of the signing certificates inside an APK.

```
usage: androsign.py [-h] [--hash HASH] [--all] apk [apk ...]
```

Return the fingerprint(s) of all certificates inside an APK

positional arguments:

apk APK(s) to extract the Fingerprint of Certificates from

(continues on next page)

(continued from previous page)

```
optional arguments:
  -h, --help      show this help message and exit
  --hash HASH    Fingerprint Hash algorithm, default SHA1
  --all, -a       Print all supported hashes
```

An example:

```
$ androsign.py --all files/golden-aligned-v1v2-out.apk
golden-aligned-v1v2-out.apk, package: 'android.appsecurity.cts.tinyapp'
Is signed v1: True
Is signed v2: True
Found 1 unique certificates
md5 e995a5ed7137307661f854e66901ee9e
sha1 0aa07c0f297b4ae834dc85a17eea8c2cf9380ff7
sha512 ↴
sha256 fb5dbd3c669af9fc236c6991e6387b7f11ff0590997f22d0f5c74ff40e04fca8
```

### 1.2.5 androaxml - AndroidManifest.xml parser

Parse the AndroidManifest.xml from an APK and show/save the XML file.

```
Usage: androaxml.py [options]

Options:
  -h, --help            show this help message and exit
  -i INPUT, --input=INPUT
                        filename input (APK or android's binary xml)
  -o OUTPUT, --output=OUTPUT
                        filename output of the xml
  -v, --version         version of the API
```

### 1.2.6 androarsc - resources.arsc parser

Parse the resources.arsc file from an APK and print human readable XML.

```
Usage: androarsc.py [options]

Options:
  -h, --help            show this help message and exit
  -i INPUT, --input=INPUT
                        filename input (APK or android resources(arsc))
  -p PACKAGE, --package=PACKAGE
                        select the package (optional)
  -l LOCALE, --locale=LOCALE
                        select the locale (optional)
  -t TYPE, --type=TYPE  select the type (string, interger, public, ...)
  -o OUTPUT, --output=OUTPUT
                        filename output
  -v, --version         version of the API
```

## 1.2.7 androdd - Decompile APKs and create CFG

androdd is a tool to create a decompiled version of an APK using the available decompilers.

### Synopsis

```
Usage: androdd.py [options]

Options:
-h, --help           show this help message and exit
-i INPUT, --input=INPUT
                     file : use this filename
-o OUTPUT, --output=OUTPUT
                     base directory to output all files
-d DECOMPILER, --decompiler=DECOMPILER
                     choose a decompiler (default: use DAD)
-j, --jar            output jar file
-f FORMAT, --format=FORMAT
                     write CFG of method in specific format (png, raw, ...)
-l LIMIT, --limit=LIMIT
                     limit analysis to specific methods/classes by using a
                     regexp
```

It also can generate control flow graphs (CFG) for each method using the graphviz format. The CFGs can be exported as image file directly.

Additionally to the decompiled classes in .java format, each method is given in a SMALI like format (.ag files)

All filenames are sanitized, so they should work on most operating systems and filesystems.


### Examples

To get all CFG in png format and limit the processing only to a certain namespace, the following command can be used:

```
androdd.py -o outputfolder -f png -i someapp.apk --limit "^.Lcom/elite/.*"
```

This will decompile the app *someapp.apk* into the folder *outputfolder* and limit the processing to all methods, where the classname starts with *com.elite..*.

A CFG might look like this:

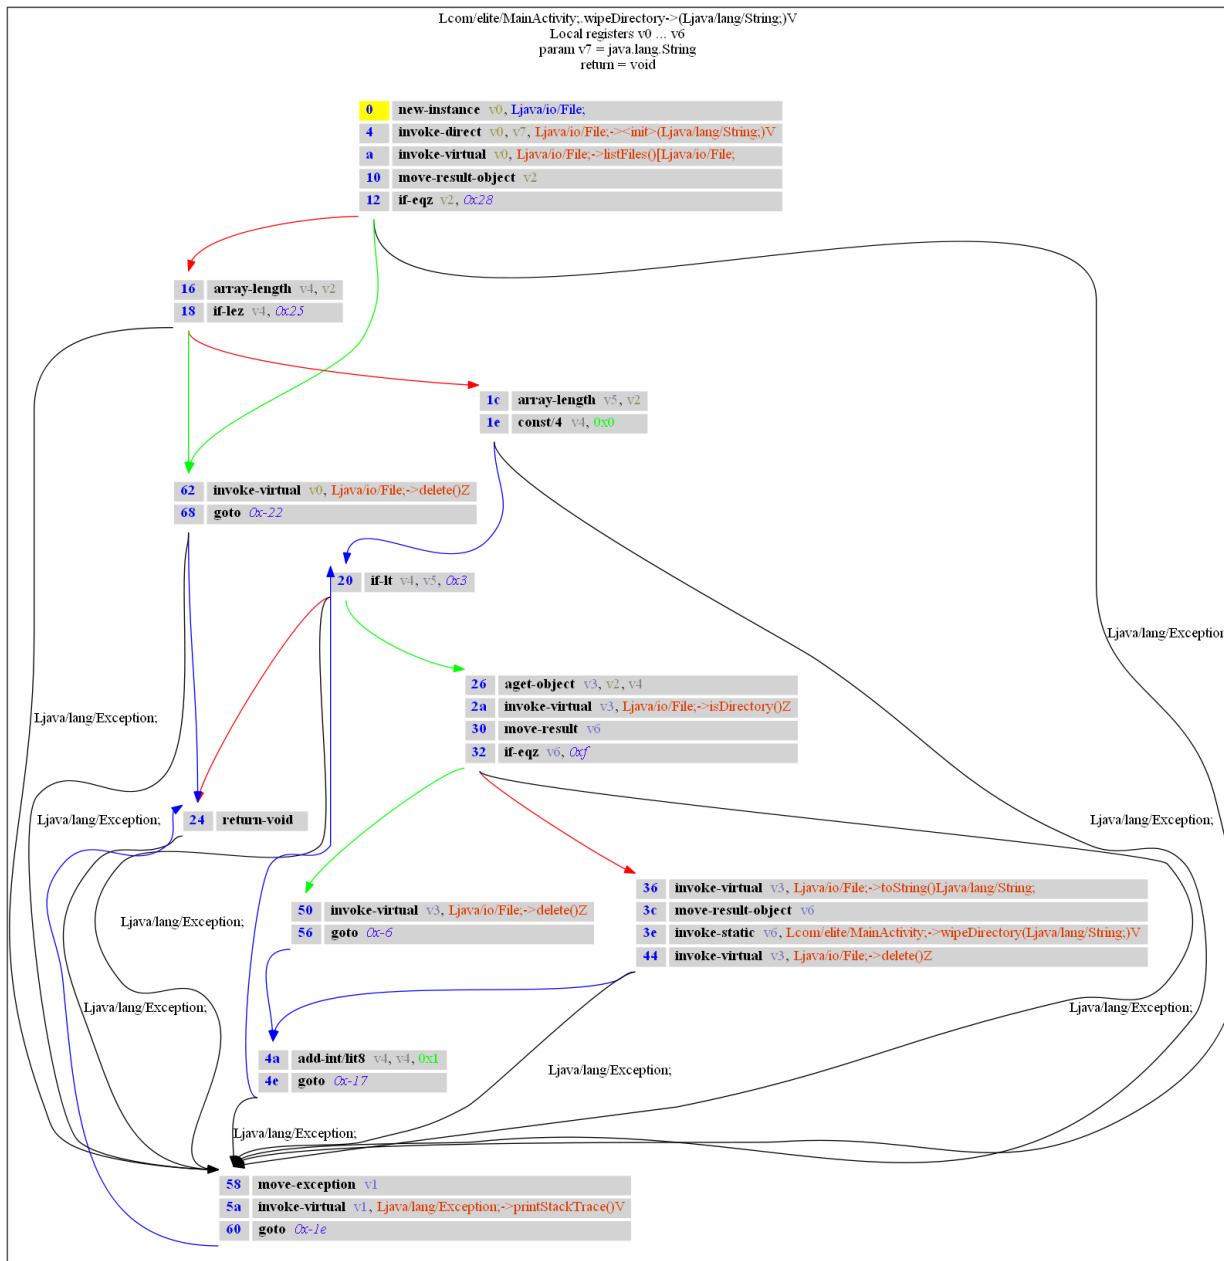

while the `.ag` file has this content:

```

# Lcom/elite/MainActivity;:->wipeDirectory(Ljava/lang/String;)V [access_flags=private_
↪static]
#
# Parameters:
# - local registers: v0...v6
# - v7:java.lang.String
#
# - return:void

wipeDirectory-BB@0x0 : [ wipeDirectory-BB@0x16 wipeDirectory-BB@0x62 ]
    0          (00000000) new-instance           v0, Ljava/io/File;

```

(continues on next page)

(continued from previous page)

```

  1      (00000004) invoke-direct           v0, v7, Ljava/io/File;-><init>(Ljava/lang/
→String;)V
  2      (0000000a) invoke-virtual          v0, Ljava/io/File;->listFiles() [Ljava/io/
→File;
  3      (00000010) move-result-object     v2
  4      (00000012) if-eqz                v2, +28
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x16 : [ wipeDirectory-BB@0x1c wipeDirectory-BB@0x62 ]
  5      (00000016) array-length          v4, v2
  6      (00000018) if-lez                v4, +25
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x1c : [ wipeDirectory-BB@0x20 ]
  7      (0000001c) array-length          v5, v2
  8      (0000001e) const/4              v4, 0
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x20 : [ wipeDirectory-BB@0x24 wipeDirectory-BB@0x26 ]
  9      (00000020) if-lt                v4, v5, +3
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x24 :
 10     (00000024) return-void
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x26 : [ wipeDirectory-BB@0x36 wipeDirectory-BB@0x50 ]
 11     (00000026) aget-object          v3, v2, v4
 12     (0000002a) invoke-virtual        v3, Ljava/io/File;->isDirectory()Z
 13     (00000030) move-result          v6
 14     (00000032) if-eqz                v6, +f
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x36 : [ wipeDirectory-BB@0x4a ]
 15     (00000036) invoke-virtual        v3, Ljava/io/File;->toString()Ljava/lang/
→String;
 16     (0000003c) move-result-object    v6
 17     (0000003e) invoke-static          v6, Lcom/elite/MainActivity;-
→wipeDirectory(Ljava/lang/String;)V
 18     (00000044) invoke-virtual        v3, Ljava/io/File;->delete()Z
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x4a : [ wipeDirectory-BB@0x20 ]
 19     (0000004a) add-int/lit8         v4, v4, 1
 20     (0000004e) goto                  -17
0:55
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)

wipeDirectory-BB@0x50 : [ wipeDirectory-BB@0x4a ]
 21     (00000050) invoke-virtual        v3, Ljava/io/File;->delete()Z

```

(continues on next page)

(continued from previous page)

```
22      (00000056) goto          -6
wipeDirectory-BB@0x58 : [ wipeDirectory-BB@0x24 ]
23      (00000058) move-exception    v1
24      (0000005a) invoke-virtual     v1, Ljava/lang/Exception;->
→printStackTrace()V
25      (00000060) goto          -1e
62:67
(Ljava/lang/Exception; -> 58 wipeDirectory-BB@0x58)
```

### 1.2.8 androdis - Disassembler for DEX

androdis is a disassembler for DEX files.

```
Usage: androdis.py [options]

Options:
-h, --help           show this help message and exit
-i INPUT, --input=INPUT
                     file : use this filename (DEX/ODEX)
-o OFFSET, --offset=OFFSET
                     offset to disassemble
-s SIZE, --size=SIZE size
```

### 1.2.9 androauto - run your own analysis

Go into automated mode using androauto.

```
Usage: androauto.py [options]

Options:
-h, --help           show this help message and exit
-d DIRECTORY, --directory=DIRECTORY
                     directory input
-v, --verbose        add debug
```

# CHAPTER 2

---

## Python API

---

### 2.1 androguard package

#### 2.1.1 Subpackages

`androguard.core` package

Subpackages

`androguard.core.analysis` package

The analysis module implements an abstraction layer for `androguard.core.bytecodes.dvm.DalvikVMFormat` objects. With the help of the `androguard.core.analysis.Analysis` object, you can bundle several DEX files together. This is not only useful for multidex files, but also for a single dex, as Analysis offers many features to investigate DEX files. One of these features is crossreferencing (XREF). It allows you to build a graph of the methods inside the DEX files. You can then create callgraphs or find methods which use a specific API method.

Submodules

`androguard.core.analysis.analysis` module

**class** `androguard.core.analysis.analysis.Analysis` (`vm=None`)

Bases: `object`

**add** (`vm`)

Add a `DalvikVMFormat` to this `Analysis`

**Parameters** `vm` – `dvm.DalvikVMFormat` to add to this `Analysis`

**create\_xref()**

Create Class, Method, String and Field crossreferences for all classes in the Analysis.

If you are using multiple DEX files, this function must be called when all DEX files are added. If you call the function after every DEX file, the crossreferences might be wrong!

**find\_classes (name='.\*', no\_external=False)**

Find classes by name, using regular expression This method will return all ClassAnalysis Object that match the name of the class.

**Parameters**

- **name** – regular expression for class name (default “.\*”)
- **no\_external** – Remove external classes from the output (default False)

**Return type** generator of *ClassAnalysis*

**find\_fields (classname='.\*', fieldname='.\*', fieldtype='.\*', accessflags='.\*')**

find fields by regex

**Parameters**

- **classname** – regular expression of the classname
- **fieldname** – regular expression of the fieldname
- **fieldtype** – regular expression of the fieldtype
- **accessflags** – regular expression of the access flags

**Return type** generator of *FieldClassAnalysis*

**find\_methods (classname='.\*', methodname='.\*', descriptor='.\*', accessflags='.\*', no\_external=False)**

Find a method by name using regular expression. This method will return all MethodClassAnalysis objects, which match the classname, methodname, descriptor and accessflags of the method.

**Parameters**

- **classname** – regular expression for the classname
- **methodname** – regular expression for the method name
- **descriptor** – regular expression for the descriptor
- **accessflags** – regular expression for the accessflags
- **no\_external** – Remove external method from the output (default False)

**Return type** generator of *MethodClassAnalysis*

**find\_strings (string='.\*')**

Find strings by regex

**Parameters** **string** – regular expression for the string to search for

**Return type** generator of *StringAnalysis*

**get\_call\_graph (classname='.\*', methodname='.\*', descriptor='.\*', accessflags='.\*', no\_isolated=False, entry\_points=[])**

Generate a directed graph based on the methods found by the filters applied. The filters are the same as in `find_methods()`

A networkx.DiGraph is returned, containing all edges only once! that means, if a method calls some method twice or more often, there will only be a single connection.

**Parameters**

- **classname** – regular expression of the classname (default: “.\*”)
- **fieldname** – regular expression of the fieldname (default: “.\*”)
- **fieldtype** – regular expression of the fieldtype (default: “.\*”)
- **accessflags** – regular expression of the access flags (default: “.\*”)
- **no\_isolated** – remove isolated nodes from the graph, e.g. methods which do not call anything (default: False)
- **entry\_points** – A list of classes that are marked as entry point

**Return type** DiGraph

**get\_class\_analysis** (*class\_name*)

Returns the *ClassAnalysis* object for a given classname.

**Parameters** **class\_name** – classname like ‘Ljava/lang/Object;’ (including L and ;)

**Returns** *ClassAnalysis*

**get\_classes** ()

Returns a list of *ClassAnalysis* objects

Returns both internal and external classes (if any)

**Return type** list of *ClassAnalysis*

**get\_external\_classes** ()

Returns all external classes, that means all classes that are not defined in the given set of *DalvikVMObjects*.

**Return type** generator of *ClassAnalysis*

**get\_field\_analysis** (*field*)

Get the FieldAnalysis for a given fieldname

**Parameters** **field** – TODO

**Returns** *FieldClassAnalysis*

**get\_fields** ()

Returns a list of *FieldClassAnalysis* objects

**get\_internal\_classes** ()

Returns all internal classes, that means all classes that are defined in the given set of ‘*DalvikVMObject*’s.

**Return type** generator of *ClassAnalysis*

**get\_method** (*method*)

Get the *MethodAnalysis* object for a given EncodedMethod. This Analysis object is used to enhance EncodedMethods.

**Parameters** **method** – EncodedMethod to search for

**Returns** *MethodAnalysis* object for the given method, or None if method was not found

**get\_method\_analysis** (*method*)

Returns the crossreferencing object for a given Method.

Beware: the similar named function `get_method()` will return a *MethodAnalysis* object, while this function returns a *MethodClassAnalysis* object!

This Method will only work after a run of `create_xref()`

**Parameters** **method** – EncodedMethod

**Returns** *MethodClassAnalysis* for the given method or None, if method was not found

**get\_method\_analysis\_by\_name** (*class\_name*, *method\_name*, *method\_descriptor*)

Returns the crossreferencing object for a given method.

This function is similar to [get\\_method\\_analysis\(\)](#), with the difference that you can look up the Method by name

**Parameters**

- **class\_name** – name of the class, for example ‘Ljava/lang/Object;’
- **method\_name** – name of the method, for example ‘onCreate’
- **method\_descriptor** – method descriptor, for example ‘(I)V’

**Returns** *MethodClassAnalysis*

**get\_method\_by\_name** (*class\_name*, *method\_name*, *method\_descriptor*)

Search for a EncodedMethod in all classes in this analysis

**Parameters**

- **class\_name** – name of the class, for example ‘Ljava/lang/Object;’
- **method\_name** – name of the method, for example ‘onCreate’
- **method\_descriptor** – descriptor, for example ‘(I I Ljava/lang/String)V’

**Returns** EncodedMethod or None if method was not found

**get\_methods** ()

Returns a list of *MethodClassAnalysis* objects

**get\_strings** ()

Returns a list of *StringAnalysis* objects

**Return type** list of *StringAnalysis*

**get\_strings\_analysis** ()

Returns a dictionary of strings and their corresponding *StringAnalysis*

**Returns** a dictionary

**is\_class\_present** (*class\_name*)

Checks if a given class name is part of this Analysis.

**Parameters** **class\_name** – classname like ‘Ljava/lang/Object;’ (including L and ;)

**Returns** True if class was found, False otherwise

**class** androguard.core.analysis.analysis.**BasicBlocks** (\_vm)

Bases: object

This class represents all basic blocks of a method

**get** ()

**Return type** return each basic block ([DVMBasicBlock](#) object)

**get\_basic\_block** (*idx*)

**get\_basic\_block\_pos** (*idx*)

**gets** ()

**Return type** a list of basic blocks ([DVMBasicBlock](#) objects)

**pop** (*idx*)

**push** (*bb*)

**class** androguard.core.analysis.analysis.**ClassAnalysis** (*classobj*)

Bases: object

**AddFXrefRead** (*method, classobj, field*)

Add a Field Read to this class

#### Parameters

- **method** –
- **classobj** –
- **field** –

#### Returns

**AddFXrefWrite** (*method, classobj, field*)

Add a Field Write to this class

#### Parameters

- **method** –
- **classobj** –
- **field** –

#### Returns

**AddMXrefFrom** (*method1, classobj, method2, offset*)

**AddMXrefTo** (*method1, classobj, method2, offset*)

**AddXrefFrom** (*ref\_kind, classobj, methodobj, offset*)

Creates a crossreference from this class. XrefFrom means, that the current class is called by another class.

#### Parameters

- **ref\_kind** –
- **classobj** – *ClassAnalysis* object to link
- **methodobj** –
- **offset** – Offset in the methods bytecode, where the call happens

#### Returns

**AddXrefTo** (*ref\_kind, classobj, methodobj, offset*)

Creates a crossreference to another class. XrefTo means, that the current class calls another class. The current class should also be contained in the another class' XrefFrom list.

#### Parameters

- **ref\_kind** –
- **classobj** – *ClassAnalysis* object to link
- **methodobj** –
- **offset** – Offset in the Methods Bytecode, where the call happens

#### Returns

**get\_fake\_method** (*name, descriptor*)

Search for the given method name and descriptor and return a fake (ExternalMethod) if required.

#### Parameters

- **name** – name of the method
- **descriptor** – descriptor of the method, for example ‘(III)V’

**Returns** *ExternalMethod*

**get\_field\_analysis**(*field*)

**get\_fields**()

Return all *FieldClassAnalysis* objects of this class

**get\_method\_analysis**(*method*)

Return the *MethodClassAnalysis* object for a given *EncodedMethod*

**Parameters** **method** – *EncodedMethod*

**Returns** *MethodClassAnalysis*

**get\_methods**()

Return all *MethodClassAnalysis* objects of this class

**get\_nb\_methods**()

Get the number of methods in this class

**get\_vm\_class**()

**get\_xref\_from**()

**get\_xref\_to**()

**is\_android\_api**()

Tries to guess if the current class is an Android API class.

This might be not very precise unless an apilist is given, with classes that are in fact known APIs. Such a list might be generated by using the android.jar files.

**Returns** boolean

**is\_external**()

Tests whether this class is an external class

**Returns** True if the Class is external, False otherwise

**class** androguard.core.analysis.analysis.**DVMBasicBlock**(*start, vm, method, context*)

Bases: object

A simple basic block of a dalvik method

**add\_note**(*note*)

**clear\_notes**()

**get\_end**()

**get\_exception\_analysis**()

**get\_instructions**()

Get all instructions from a basic block.

**Return type** Return all instructions in the current basic block

**get\_last**()

**get\_last\_length**()

**get\_method**()

**get\_name**()

```
get_nb_instructions()
get_next()
    Get next basic blocks

    Return type a list of the next basic blocks

get_notes()
get_prev()
    Get previous basic blocks

    Return type a list of the previous basic blocks

get_special_ins(idx)
    Return the associated instruction to a specific instruction (for example a packed/sparse switch)

    Parameters idx – the index of the instruction

    Return type None or an Instruction

get_start()
push(i)
set_childs(values)
set_exception_analysis(exception_analysis)
set_fathers(f)
set_notes(value)
show()

class androguard.core.analysis.analysis.ExceptionAnalysis(exception, bb)
Bases: object

get()
show_buff()

class androguard.core.analysis.analysis.Exceptions(_vm)
Bases: object

add(exceptions, basic_blocks)

get()
get_exception(addr_start, addr_end)
gets()

class androguard.core.analysis.analysis.ExternalClass(name)
Bases: object

GetMethod(name, descriptor)

get_method(name, descriptor)
    Get the method by name and descriptor, or create a new one if the requested method does not exists.

    Parameters
        • name – method name
        • descriptor – method descriptor, for example '(I)V'

    Returns ExternalMethod
```

```
get_methods()
    Return the stored methods for this external class :return:

get_name()
    Returns the name of the ExternalClass object

class androguard.core.analysis.analysis.ExternalMethod(class_name, name, descriptor)
    Bases: object

    get_access_flags_string()
    get_class_name()
    get_descriptor()
    get_name()

class androguard.core.analysis.analysis.FieldClassAnalysis(field)
    Bases: object

    AddXrefRead(classobj, methodobj)
    AddXrefWrite(classobj, methodobj)
    get_field()
    get_xref_read()
    get_xref_write()

class androguard.core.analysis.analysis.MethodAnalysis(vm, method)
    Bases: object

    get_basic_blocks()
        Return type a BasicBlocks object

    get_length()
        Return type an integer which is the length of the code

    get_method()
    get_vm()
    show()
        Prints the content of this method to stdout.

        This will print the method signature and the decompiled code.

class androguard.core.analysis.analysis.MethodClassAnalysis(method)
    Bases: object

    AddXrefFrom(classobj, methodobj, offset)
        Add a crossrefernece from another method (this method is called by another method)

        Parameters
            • classobj – ClassAnalysis
            • methodobj – EncodedMethod
            • offset – integer where in the method the call happens

    AddXrefTo(classobj, methodobj, offset)
        Add a crossreference to another method (this method calls another method)

        Parameters
```

- **classobj** – *ClassAnalysis*
- **methodobj** – *EncodedMethod*
- **offset** – integer where in the method the call happens

**get\_method()**

Return the *EncodedMethod* object that relates to this object :return: *dvm.EncodedMethod*

**get\_xref\_from()**

Returns a list of three tuples containing the class, method and offset of the call, from where this object was called.

The list of tuples has the form: (*ClassAnalysis*, *EncodedMethod* or *ExternalMethod*, int)

**get\_xref\_to()**

Returns a list of three tuples containing the class, method and offset of the call, which are called by this method.

The list of tuples has the form: (*ClassAnalysis*, *EncodedMethod* or *ExternalMethod*, int)

**is\_android\_api()**

Returns True if the method seems to be an Android API method.

This method might be not very precise unless an list of known API methods is given.

**Returns** boolean

**is\_external()**

Return True if the underlying methd is external

**Return type** boolean

**class androguard.core.analysis.analysis.StringAnalysis(value)**

Bases: object

**AddXrefFrom(classobj, methodobj)****get\_orig\_value()****get\_value()****get\_xref\_from()****set\_value(value)****androguard.core.analysis.analysis.is\_ascii\_obfuscation(vm)**

Tests if any class inside a DalvikVMObject uses ASCII Obfuscation (e.g. UTF-8 Chars in Classnames)

**Parameters** *vm* – *DalvikVMObject*

**Returns** True if ascii obfuscation otherwise False

**androguard.core.analysis.auto module****class androguard.core.analysis.auto.AndroAuto(settings)**

Bases: object

The main class which analyse automatically android apps by calling methods from a specific object :param settings: the settings of the analysis :type settings: dict

**dump()**

Dump the analysis

**dump\_file** (*filename*)

Dump the analysis in a filename

**go()**

Launch the analysis

**class** androguard.core.analysis.auto.**DefaultAndroAnalysis**

Bases: object

This class can be used as a template in order to analyse apps

**analysis\_adex** (*log, adexobj*)

This method is called in order to know if the analysis must continue

**Parameters**

- **log** – an object which corresponds to a unique app
- **adexobj** – a VMAnalysis object

**Return type** a boolean

**analysis\_apk** (*log, apkobj*)

This method is called in order to know if the analysis must continue

**Parameters**

- **log** – an object which corresponds to a unique app
- **apkobj** – a APK object

**Return type** a boolean

**analysis\_app** (*log, apkobj, dexobj, adexobj*)

This method is called if you wish to analyse the final app

**Parameters**

- **log** – an object which corresponds to a unique app
- **apkobj** – a APK object
- **dexobj** – a DalvikVMFormat object
- **adexobj** – a VMAnalysis object

**analysis\_arsc** (*log, arscobj*)

This method is called in order to know if the analysis must continue

**Parameters**

- **log** – an object which corresponds to a unique app
- **arscobj** – a ARSCPParser object

**Return type** a boolean

**analysis\_axml** (*log, axmlobj*)

This method is called in order to know if the analysis must continue

**Parameters**

- **log** – an object which corresponds to a unique app
- **axmlobj** – a AXMLPrinter object

**Return type** a boolean

**analysis\_dex** (*log, dexobj*)

This method is called in order to know if the analysis must continue

**Parameters**

- **log** – an object which corresponds to a unique app
- **dexobj** – a DalvikVMFormat object

**Return type** a boolean**analysis\_dex** (*log, deyobj*)

This method is called in order to know if the analysis must continue

**Parameters**

- **log** – an object which corresponds to a unique app
- **deyobj** – a DalvikOdexVMFormat object

**Return type** a boolean**crash** (*log, why*)

This method is called if a crash appends

**Parameters**

- **log** – an object which corresponds to a unique app
- **why** – the string exception

**create\_adex** (*log, dexobj*)

This method is called in order to create a VMAnalysis object

**Parameters**

- **log** – an object which corresponds to a unique app
- **dexobj** – a DalvikVMFormat object

**Rtype** a Analysis object**create\_apk** (*log, fileraw*)

This method is called in order to create a new APK object

**Parameters**

- **log** – an object which corresponds to a unique app
- **fileraw** – the raw apk (a string)

**Return type** an APK object**create\_arsc** (*log, fileraw*)

This method is called in order to create a new ARSC object

**Parameters**

- **log** – an object which corresponds to a unique app
- **fileraw** – the raw arsc (a string)

**Return type** an APK object**create\_axml** (*log, fileraw*)

This method is called in order to create a new AXML object

**Parameters**

- **log** – an object which corresponds to a unique app
- **fileraw** – the raw axml (a string)

**Return type** an APK object

**create\_dex** (*log, dexraw*)

This method is called in order to create a DalvikVMFormat object

**Parameters**

- **log** – an object which corresponds to a unique app
- **dexraw** – the raw classes.dex (a string)

**Return type** a DalvikVMFormat object

**create\_dexy** (*log, dexraw*)

This method is called in order to create a DalvikOdexVMFormat object

**Parameters**

- **log** – an object which corresponds to a unique app
- **dexraw** – the raw odex file (a string)

**Return type** a DalvikOdexVMFormat object

**dump** ()

This method is called to dump the result

**dump\_file** (*filename*)

This method is called to dump the result in a file

**Parameters** **filename** – the filename to dump the result

**fetcher** (*q*)

This method is called to fetch a new app in order to analyse it. The queue must be fill with the following format: (filename, raw)

**Parameters** **q** – the Queue to put new app

**filter\_file** (*log, fileraw*)

This method is called in order to filer a specific app

**Parameters**

- **log** – an object which corresponds to a unique app
- **fileraw** – the raw app (a string)

**Return type** a set with 2 elements, the return value (boolean) if it is necessary to continue the analysis and the file type

**finish** (*log*)

This method is called before the end of the analysis

**Parameters** **log** – an object which corresponds to a unique app

**class** androguard.core.analysis.auto.DirectoryAndroAnalysis (*directory*)

Bases: *androguard.core.analysis.auto.DefaultAndroAnalysis*

A simple class example to analyse a directory

**fetcher** (*q*)

This method is called to fetch a new app in order to analyse it. The queue must be fill with the following format: (filename, raw)

**Parameters** `q` – the Queue to put new app

## Module contents

### androguard.core.api\_specific\_resources package

#### Module contents

**exception** `androguard.core.api_specific_resources.APILevelNotFoundError`

Bases: `Exception`

`androguard.core.api_specific_resources.load_permission_mappings(apilevel)`

Load the API/Permission mapping for the requested API level. If the requested level was not found, None is returned.

**Parameters** `apilevel` – integer value of the API level, i.e. 24 for Android 7.0

**Returns** a dictionary of {MethodSignature: [List of Permissions]}

`androguard.core.api_specific_resources.load_permissions(apilevel)`

Load the Permissions for the given apilevel

**Parameters** `apilevel` – integer value of the API level

**Returns** a dictionary of {Permission Name: {Permission info}}

### androguard.core.bytecodes package

The bytecodes modules are one very important core feature of Androguard. They contain parsers for APK, AXML, DEX, ODEX and DEY files as well for formats used inside these formats. These might be MUTF-8 for string encoding in DEX files as well as the widely used LEB128 encoding for numbers.

The most important modules might be `androguard.core.bytecodes.apk.APK` and `androguard.core.bytecodes.dvm.DalvikVMFormat`.

#### Submodules

##### androguard.core.bytecodes.apk module

**class** `androguard.core.bytecodes.apk.APK(filename, raw=False, magic_file=None, skip_analysis=False, testzip=False)`

Bases: `object`

**files**

Returns a dictionary of filenames and detected magic type

**Returns** dictionary of files and their mime type

**get\_activities()**

Return the android:name attribute of all activities

**Return type** a list of str

**get\_all\_dex()**

Return the raw data of all classes dex files

**Return type** a generator of bytes

### `get_android_manifest_axml()`

Return the AXMLPrinter object which corresponds to the AndroidManifest.xml file

**Return type** `AXMLPrinter`

### `get_android_manifest_xml()`

Return the parsed xml object which corresponds to the AndroidManifest.xml file

**Return type** `Element`

### `get_android_resources()`

Return the `ARSCParser` object which corresponds to the resources.arsc file

**Return type** `ARSCParser`

### `get_androidversion_code()`

Return the android version code

This information is read from the AndroidManifest.xml

**Return type** `str`

### `get_androidversion_name()`

Return the android version name

This information is read from the AndroidManifest.xml

**Return type** `str`

### `get_app_icon(max_dpi=65536)`

Return the first icon file name, which density is not greater than max\_dpi, unless exact icon resolution is set in the manifest, in which case return the exact file.

This information is read from the AndroidManifest.xml

From [https://developer.android.com/guide/practices/screens\\_support.html](https://developer.android.com/guide/practices/screens_support.html) and [https://developer.android.com/ndk/reference/group\\_\\_configuration.html](https://developer.android.com/ndk/reference/group__configuration.html)

- DEFAULT 0dpi
- ldpi (low) 120dpi
- mdpi (medium) 160dpi
- TV 213dpi
- hdpi (high) 240dpi
- xhdpi (extra-high) 320dpi
- xxhdpi (extra-extra-high) 480dpi
- xxxhdpi (extra-extra-extra-high) 640dpi
- anydpi 65534dpi (0xFFFFE)
- nodpi 65535dpi (0xFFFF)

There is a difference between nodpi and anydpi: nodpi will be used if no other density is specified. Or the density does not match. nodpi is the fallback for everything else. If there is a resource that matches the DPI, this is used. anydpi is also valid for all densities but in this case, anydpi will overrule all other files! Therefore anydpi is usually used with vector graphics and with constraints on the API level. For example adaptive icons are usually marked as anydpi.

When it comes now to selecting an icon, there is the following flow: 1) is there an anydpi icon? 2) is there an icon for the dpi of the device? 3) is there a nodpi icon? 4) (only on very old devices) is there a icon with dpi 0 (the default)

For more information read here: <https://stackoverflow.com/a/34370735/446140>

**Return type** str

**get\_app\_name()**  
Return the appname of the APK  
This name is read from the AndroidManifest.xml

**Return type** str

**get\_certificate(filename)**  
Return a X.509 certificate object by giving the name in the apk file

**Parameters** `filename` – filename of the signature file in the APK

**Returns** a Certificate certificate

**get\_certificate\_der(filename)**  
Return the DER coded X.509 certificate from the signature file.

**Parameters** `filename` – Signature filename in APK

**Returns** DER coded X.509 certificate as binary

**get\_certificates\_der\_v2()**  
Return a list of DER coded X.509 certificates from the v2 signature

**get\_certificates\_v2()**  
Return a list of `cryptography.x509.Certificate` which are found in the v2 signing block. Note that we simply extract all certificates regardless of the signer. Therefore this is just a list of all certificates found in all signers.

**get\_declared\_permissions()**  
Returns list of the declared permissions.

**Return type** list of strings

**get\_declared\_permissions\_details()**  
Returns declared permissions with the details.

**Return type** dict

**get\_details\_permissions()**  
Return permissions with details

**Return type** dict of {permission: [protectionLevel, label, description]}

**get\_dex()**  
Return the raw data of the classes dex file  
  
This will give you the data of the file called `classes.dex` inside the APK. If the APK has multiple DEX files, you need to use `get_all_dex()`.

**Return type** bytes

**get\_dex\_names()**  
Return the names of all DEX files found in the APK. This method only accounts for “official” dex files, i.e. all files in the root directory of the APK named `classes.dex` or `classes[0-9]+.dex`

**Return type** a list of str

**get\_effective\_target\_sdk\_version()**  
Return the effective targetSdkVersion, always returns int > 0.

If the targetSdkVersion is not set, it defaults to 1. This is set based on defaults as defined in: <https://developer.android.com/guide/topics/manifest/uses-sdk-element.html>

**Return type** int

**get\_element** (*tag\_name*, *attribute*, \*\**attribute\_filter*)

Return element in xml files which match with the tag name and the specific attribute

**Parameters**

- **tag\_name** (*string*) – specify the tag name
- **attribute** (*string*) – specify the attribute

**Return type** string

**get\_elements** (*tag\_name*, *attribute*, *with\_namespace=True*)

Return elements in xml files which match with the tag name and the specific attribute

**Parameters**

- **tag\_name** – a string which specify the tag name
- **attribute** – a string which specify the attribute

**get\_features** ()

Return a list of all android:names found for the tag uses-feature in the AndroidManifest.xml

**Returns** list

**get\_file** (*filename*)

Return the raw data of the specified filename inside the APK

**Return type** bytes

**get\_filename** ()

Return the filename of the APK

**Return type** str

**get\_files** ()

Return the file names inside the APK.

**Return type** a list of str

**get\_files\_crc32** ()

Calculates and returns a dictionary of filenames and CRC32

**Returns** dict of filename: CRC32

**get\_files\_information** ()

Return the files inside the APK with their associated types and crc32

**Return type** str, str, int

**get\_files\_types** ()

Return the files inside the APK with their associated types (by using python-magic)

**Return type** a dictionnary

**get\_intent\_filters** (*itemtype*, *name*)

Find intent filters for a given item and name.

Intent filter are attached to activities, services or receivers. You can search for the intent filters of such items and get a dictionary of all attached actions and intent categories.

**Parameters**

- **itemtype** – the type of parent item to look for, e.g. *activity*, *service* or *receiver*
- **name** – the *android:name* of the parent item, e.g. activity name

**Returns** a dictionary with the keys *action* and *category* containing the *android:name* of those items

**get\_libraries()**

Return the android:name attributes for libraries

**Return type** list

**get\_main\_activity()**

Return the name of the main activity

This value is read from the AndroidManifest.xml

**Return type** str

**get\_max\_sdk\_version()**

Return the android:maxSdkVersion attribute

**Return type** string

**get\_min\_sdk\_version()**

Return the android:minSdkVersion attribute

**Return type** string

**get\_package()**

Return the name of the package

This information is read from the AndroidManifest.xml

**Return type** str

**get\_permissions()**

Return permissions

**Return type** list of str

**get\_providers()**

Return the android:name attribute of all providers

**Return type** a list of string

**get\_raw()**

Return raw bytes of the APK

**Return type** bytes

**get\_receivers()**

Return the android:name attribute of all receivers

**Return type** a list of string

**get\_requested\_aosp\_permissions()**

Returns requested permissions declared within AOSP project.

This includes several other permissions as well, which are in the platform apps.

**Return type** list of str

**get\_requested\_aosp\_permissions\_details()**

Returns requested aosp permissions with details.

**Return type** dictionary

```
get_requested_permissions = DeprecationWarning(<function APK.get_requested_permissions>)
get_requested_third_party_permissions()
    Returns list of requested permissions not declared within AOSP project.

Return type list of strings

get_services()
    Return the android:name attribute of all services

Return type a list of str

get_signature()
    Return the data of the first signature file found (v1 Signature / JAR Signature)

Return type First signature name or None if not signed

get_signature_name()
    Return the name of the first signature file found.

get_signature_names()
    Return a list of the signature file names (v1 Signature / JAR Signature)

Return type List of filenames matching a Signature

get_signatures()
    Return a list of the data of the signature files. Only v1 / JAR Signing.

Return type list of bytes

get_target_sdk_version()
    Return the android:targetSdkVersion attribute

Return type string

get_uses_implied_permission_list()
    Return all permissions implied by the target SDK or other permissions.

Return type list of string

is_androidtv()
    Checks if this application does not require a touchscreen, as this is the rule to get into the TV section of the Play Store See: https://developer.android.com/training/tv/start/start.html for more information.

Returns True if ‘android.hardware.touchscreen’ is not required, False otherwise

is_leanback()
    Checks if this application is build for TV (Leanback support) by checkin if it uses the feature ‘android.software.leanback’

Returns True if leanback feature is used, false otherwise

is_multidex()
    Test if the APK has multiple DEX files

Returns True if multiple dex found, otherwise False

is_signed()
    Returns true if either a v1 or v2 (or both) signature was found.

is_signed_v1()
    Returns true if a v1 / JAR signature was found.

    Returning True does not mean that the file is properly signed! It just says that there is a signature file which needs to be validated.
```

**is\_signed\_v2()**

Returns true of a v2 / APK signature was found.

Returning *True* does not mean that the file is properly signed! It just says that there is a signature file which needs to be validated.

**is\_valid\_APK()**

Return true if the APK is valid, false otherwise. An APK is seen as valid, if the AndroidManifest.xml could be successful parsed. This does not mean that the APK has a valid signature nor that the APK can be installed on an Android system.

**Return type** boolean

**is\_wearable()**

Checks if this application is build for wearables by checking if it uses the feature ‘android.hardware.type.watch’ See: <https://developer.android.com/training/wearables/apps/creating.html> for more information.

Not every app is setting this feature (not even the example Google provides), so it might be wise to not 100% rely on this feature.

**Returns** True if wearable, False otherwise

**new\_zip(filename, deleted\_files=None, new\_files={})**

Create a new zip file

**Parameters**

- **filename** (*string*) – the output filename of the zip
- **deleted\_files** (*None* or a *string*) – a regex pattern to remove specific file
- **new\_files** (a *dict* (*key:filename, value:content of the file*)) – a dictionary of new files

**show()****exception androguard.core.bytecodes.apk.BrokenAPKError**

Bases: *androguard.core.bytecodes.apk.Error*

**exception androguard.core.bytecodes.apk.Error**

Bases: *Exception*

Base class for exceptions in this module.

**exception androguard.core.bytecodes.apk.FileNotPresent**

Bases: *androguard.core.bytecodes.apk.Error*

**androguard.core.bytecodes.apk.parse\_lxml\_dom(tree)****androguard.core.bytecodes.apk.show\_Certificate(cert, short=False)**

Print Fingerprints, Issuer and Subject of an X509 Certificate.

**Parameters**

- **cert** (*cryptography.x509.Certificate*) – X509 Certificate to print
- **short** (*Boolean*) – Print in shortform for DN (Default: False)

**androguard.core.bytecodes.dvm module****class androguard.core.bytecodes.dvm.AnnotationElement(buff, cm)**

Bases: *object*

This class can parse an annotation\_element of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the annotation\_element
- **cm** (*ClassManager*) – a ClassManager object

**get\_length()**

**get\_name\_idx()**

Return the element name, represented as an index into the string\_ids section

**Return type** int

**get\_obj()**

**get\_raw()**

**get\_value()**

Return the element value (EncodedValue)

**Return type** a *EncodedValue* object

**show()**

**class** androguard.core.bytecodes.dvm.AnnotationItem(*buff, cm*)

Bases: object

This class can parse an annotation\_item of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the annotation\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_annotation()**

Return the encoded annotation contents

**Return type** a *EncodedAnnotation* object

**get\_length()**

**get\_obj()**

**get\_off()**

**get\_raw()**

**get\_visibility()**

Return the intended visibility of this annotation

**Return type** int

**reload()**

**set\_off(*off*)**

**show()**

**class** androguard.core.bytecodes.dvm.AnnotationOffItem(*buff, cm*)

Bases: object

This class can parse an annotation\_off\_item of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the annotation\_off\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_length()**

**get\_obj()**

**get\_raw()**

**show()**

**class** androguard.core.bytecodes.dvm.AnnotationSetItem(*buff, cm*)

Bases: object

This class can parse an annotation\_set\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the annotation\_set\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_annotation\_off\_item()**

Return the offset from the start of the file to an annotation

**Return type** a list of *AnnotationOffItem*

**get\_length()**

**get\_obj()**

**get\_off()**

**get\_raw()**

**reload()**

**set\_off(*off*)**

**show()**

**class** androguard.core.bytecodes.dvm.AnnotationSetRefItem(*buff, cm*)

Bases: object

This class can parse an annotation\_set\_ref\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the annotation\_set\_ref\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_annotations\_off()**

Return the offset from the start of the file to the referenced annotation set or 0 if there are no annotations for this element.

**Return type** int

**get\_obj()**

**get\_raw()**

**show()**

**class** androguard.core.bytecodes.dvm.AnnotationSetRefList (*buff, cm*)

Bases: object

This class can parse an annotation\_set\_ref\_list\_item of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the annotation\_set\_ref\_list\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_length()**

**get\_list()**

Return elements of the list

**Return type** *AnnotationSetRefItem*

**get\_obj()**

**get\_off()**

**get\_raw()**

**reload()**

**set\_off(*off*)**

**show()**

**class** androguard.core.bytecodes.dvm.AnnotationsDirectoryItem (*buff, cm*)

Bases: object

This class can parse an annotations\_directory\_item of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the annotations\_directory\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_annotated\_fields\_size()**

Return the count of fields annotated by this item

**Return type** int

**get\_annotated\_methods\_size()**

Return the count of methods annotated by this item

**Return type** int

**get\_annotated\_parameters\_size()**

Return the count of method parameter lists annotated by this item

**Return type** int

**get\_class\_annotations\_off()**

Return the offset from the start of the file to the annotations made directly on the class, or 0 if the class has no direct annotations

**Return type** int

**get\_field\_annotations()**

Return the list of associated field annotations

**Return type** a list of *FieldAnnotation*

```
get_length()
get_method_annotations()
    Return the list of associated method annotations

    Return type a list of MethodAnnotation

get_obj()
get_off()
get_parameter_annotations()
    Return the list of associated method parameter annotations

    Return type a list of ParameterAnnotation

get_raw()
reload()
set_off(off)
show()

class androguard.core.bytecodes.dvm.ClassDataItem(buff, cm)
Bases: object

This class can parse a class_data_item of a dex file

Parameters

- buff (Buff object) – a string which represents a Buff object of the class_data_item
- cm (ClassManager) – a ClassManager object

get_direct_methods()
    Return the defined direct (any of static, private, or constructor) methods, represented as a sequence of encoded elements

    Return type a list of EncodedMethod objects

get_direct_methods_size()
    Return the number of direct methods defined in this item

    Return type int

get_fields()
    Return static and instance fields

    Return type a list of EncodedField objects

get_instance_fields()
    Return the defined instance fields, represented as a sequence of encoded elements

    Return type a list of EncodedField objects

get_instance_fields_size()
    Return the number of instance fields defined in this item

    Return type int

get_length()

get_methods()
    Return direct and virtual methods

    Return type a list of EncodedMethod objects
```

```
get_obj()
get_off()
get_raw()
get_static_fields()
    Return the defined static fields, represented as a sequence of encoded elements

    Return type a list of EncodedField objects

get_static_fields_size()
    Return the number of static fields defined in this item

    Return type int

get_virtual_methods()
    Return the defined virtual (none of static, private, or constructor) methods, represented as a sequence of encoded elements

    Return type a list of EncodedMethod objects

get_virtual_methods_size()
    Return the number of virtual methods defined in this item

    Return type int

reload()
set_off(off)
set_static_fields(value)
show()

class androguard.core.bytecodes.dvm.ClassDefItem(buff, cm)
Bases: object

This class can parse a class_def_item of a dex file

Parameters

- buff (Buff object) – a string which represents a Buff object of the class_def_item
- cm (ClassManager) – a ClassManager object

get_access_flags()
    Return the access flags for the class (public, final, etc.)

    Return type int

get_access_flags_string()
    Return the access flags string of the class

    Return type string

get_annotations_off()
    Return the offset from the start of the file to the annotations structure for this class, or 0 if there are no annotations on this class.

    Return type int

get_ast()

get_class_data()
    Return the associated class_data_item

    Return type a ClassDataItem object
```

**get\_class\_data\_off()**  
Return the offset from the start of the file to the associated class data for this item, or 0 if there is no class data for this class

**Return type** int

**get\_class\_idx()**  
Return the index into the type\_ids list for this class

**Return type** int

**get\_fields()**  
Return all fields of this class

**Return type** a list of *EncodedField* objects

**get\_interfaces()**  
Return the name of the interface

**Return type** string

**get\_interfaces\_off()**  
Return the offset from the start of the file to the list of interfaces, or 0 if there are none

**Return type** int

**get\_length()**

**get\_methods()**  
Return all methods of this class

**Return type** a list of *EncodedMethod* objects

**get\_name()**  
Return the name of this class

**Return type** int

**get\_obj()**

**get\_raw()**

**get\_source()**

**get\_source\_ext()**

**get\_source\_file\_idx()**  
Return the index into the string\_ids list for the name of the file containing the original source for (at least most of) this class, or the special value NO\_INDEX to represent a lack of this information

**Return type** int

**get\_static\_values\_off()**  
Return the offset from the start of the file to the list of initial values for static fields, or 0 if there are none (and all static fields are to be initialized with 0 or null)

**Return type** int

**get\_superclass\_idx()**  
Return the index into the type\_ids list for the superclass

**Return type** int

**get\_superclassname()**  
Return the name of the super class

**Return type** string

`reload()`

`set_name(value)`

`show()`

`source()`

Return the source code of the entire class

**Return type** string

**class** androguard.core.bytecodes.dvm.**ClassHDefItem**(size, buff, cm)

Bases: object

This class can parse a list of class\_def\_item of a dex file

**Parameters**

- `buff (Buff object)` – a string which represents a Buff object of the list of class\_def\_item
- `cm (ClassManager)` – a ClassManager object

`get_class_idx(idx)`

`get_length()`

`get_method(name_class, name_method)`

`get_names()`

`get_obj()`

`get_off()`

`get_raw()`

`reload()`

`set_off(off)`

`show()`

**class** androguard.core.bytecodes.dvm.**ClassManager**(vm, config)

Bases: object

This class is used to access to all elements (strings, type, proto ...) of the dex format

`add_type_item(type_item, c_item, item)`

`get_all_engine()`

`get_ascii_string(s)`

`get_class_data_item(off)`

`get_code(idx)`

`get_debug_off(off)`

`get_encoded_array_item(off)`

`get_engine()`

`get_field(idx)`

`get_field_ref(idx)`

`get_item_by_offset(offset)`

```
get_lazy_analysis()
get_method(idx)
get_method_ref(idx)
get_next_offset_item(idx)
get_obj_by_offset(offset)
get_odex_format()
get_proto(idx)
get_raw_string(idx)
get_string(idx)
get_string_by_offset(offset)
get_type(idx)
get_type_list(off)
get_type_ref(idx)
set_decompiler(decompiler)
set_hook_class_name(class_def, value)
set_hook_field_name(encoded_field, value)
set_hook_method_name(encoded_method, value)
set_hook_string(idx, value)

class androguard.core.bytecodes.dvm.CodeItem(size, buff, cm)
Bases: object
    get_code(off)
    get_length()
    get_obj()
    get_off()
    get_raw()
    reload()
    set_off(off)
    show()

class androguard.core.bytecodes.dvm.ConstString(orig_ins, value)
Bases: androguard.core.bytecodes.dvm.Instruction21c
Simulate a const-string instruction.

    get_operands(idx=-1)
        Return all operands
            Return type list
    get_raw_string()

class androguard.core.bytecodes.dvm.DBGBytecode(cm, op_value)
Bases: object
```

```
add (value, ttype)
get_obj()
get_op_value()
get_raw()
get_value()
show()

class androguard.core.bytecodes.dvm.DCode (class_manager, offset, size, buff)
Bases: object
```

This class represents the instructions of a method

#### Parameters

- **class\_manager** (*ClassManager* object) – the ClassManager
- **offset** (*int*) – the offset of the buffer
- **size** (*int*) – the total size of the buffer
- **buff** (*string*) – a raw buffer where are the instructions

**add\_inote** (msg, idx, off=None)

Add a message to a specific instruction by using (default) the index of the address if specified

#### Parameters

- **msg** (*string*) – the message
- **idx** (*int*) – index of the instruction (the position in the list of the instruction)
- **off** (*int*) – address of the instruction

**get\_insn\_off** (off)

Get a particular instruction by using the address

**Parameters** **off** (*int*) – address of the instruction

**Return type** an *Instruction* object

**getInsn** ()

Get the insn buffer

**Return type** string

**get\_instruction** (idx, off=None)

Get a particular instruction by using (default) the index of the address if specified

#### Parameters

- **idx** (*int*) – index of the instruction (the position in the list of the instruction)
- **off** (*int*) – address of the instruction

**Return type** an *Instruction* object

**get\_instructions** ()

Get the instructions

**Return type** a generator of each *Instruction* (or a cached list of instructions if you have setup instructions)

**get\_length** ()

Return the length of this object

**Return type** int

**get\_raw()**  
Return the raw buffer of this object

**Return type** bytearray

**is\_cached\_instructions()**

**off\_to\_pos(off)**  
Get the position of an instruction by using the address

**Parameters** off (int) – address of the instruction

**Return type** int

**reload()**

**set\_idx(idx)**  
Set the start address of the buffer

**Parameters** idx (int) – the index

**setInsn(insn)**  
Set a new raw buffer to disassemble

**Parameters** insn (string) – the buffer

**setInstructions(instructions)**  
Set the instructions

**Parameters** instructions (a list of [Instruction](#)) – the list of instructions

**show()**  
Display (with a pretty print) this object

**class** androguard.core.bytecodes.dvm.DalvikCode (buff, cm)  
Bases: object

This class represents the instructions of a method

**Parameters**

- buff (string) – a raw buffer where are the instructions
- cm ([ClassManager](#) object) – the ClassManager

**add\_inote(msg, idx, off=None)**  
Add a message to a specific instruction by using (default) the index of the address if specified

**Parameters**

- msg (string) – the message
- idx (int) – index of the instruction (the position in the list of the instruction)
- off (int) – address of the instruction

**get\_bc()**  
Return the associated code object

**Return type** [DCode](#)

**get\_debug()**  
Return the associated debug object

**Return type** [DebugInfoItem](#)

```
get_debug_info_off()
    Get the offset from the start of the file to the debug info (line numbers + local variable info) sequence for this code, or 0 if there simply is no information

    Return type int

get_handlers()
    Get the bytes representing a list of lists of catch types and associated handler addresses.

    Return type EncodedCatchHandlerList

get_ins_size()
    Get the number of words of incoming arguments to the method that this code is for

    Return type int

get_insn_size()
    Get the size of the instructions list, in 16-bit code units

    Return type int

get_instruction(idx, off=None)
get_length()
get_obj()
get_off()
get_outs_size()
    Get the number of words of outgoing argument space required by this code for method invocation

    Return type int

get_raw()
    Get the reconstructed code as bytearray

    Return type bytearray

get_registers_size()
    Get the number of registers used by this code

    Return type int

get_size()
get_tries()
    Get the array indicating where in the code exceptions are caught and how to handle them

    Return type a list of TryItem objects

get_tries_size()
    Get the number of TryItem for this instance

    Return type int

reload()
set_idx(idx)
set_off(off)
show()

class androguard.core.bytecodes.dvm.DalvikOdexVMFormat(buff,      decompiler=None,
                                                       config=None,           us-
                                                       ing_api=None)
```

Bases: *androguard.core.bytecodes.dvm.DalvikVMFormat*

This class can parse an odex file

#### Parameters

- **buff** (*string*) – a string which represents the odex file
- **decompiler** (*object*) – associate a decompiler object to display the java source code

**Example** DalvikOdexVMFormat( read("classes.odex") )

**get\_buff()**

**get\_dependencies()**

Return the odex dependencies object

**Return type** an OdexDependencies object

**get\_format\_type()**

Return the type

**Return type** a string

**save()**

Do not use !

**class** androguard.core.bytecodes.dvm.DalvikVMFormat(*buff*, *decompiler=None*, *config=None*, *using\_api=None*)

Bases: androguard.core.bytecode.\_Bytecode

This class can parse a classes.dex file of an Android application (APK).

#### Parameters

- **buff** (*string*) – a string which represents the classes.dex file
- **decompiler** (*object*) – associate a decompiler object to display the java source code

**Example** DalvikVMFormat( read("classes.dex") )

**colorize\_operands** (*operands, colors*)

**create\_python\_export()**

Export classes/methods/fields' names in the python namespace

**disassemble** (*offset, size*)

Disassembles a given offset in the DEX file

#### Parameters

- **offset** (*int*) – offset to disassemble in the file (from the beginning of the file)
- **size** –

**fix\_checksums** (*buff*)

Fix a dex format buffer by setting all checksums

**Return type** string

**get\_BRANCH\_DVM\_OPCODES()**

**get\_all\_fields()**

Return a list of field items

**Return type** a list of *FieldIdItem* objects

**get\_api\_version()**

This method returns api version that should be used for loading api specific resources.

**Return type** int

**get\_class** (*name*)  
Return a specific class

**Parameters** **name** – the name of the class

**Return type** a *ClassDefItem* object

**get\_class\_manager** ()

This function returns a ClassManager object which allow you to get access to all index references (strings, methods, fields, ....)

**Return type** *ClassManager* object

**get\_classes** ()

Return all classes

**Return type** a list of *ClassDefItem* objects

**get\_classes\_def\_item** ()

This function returns the class def item

**Return type** *ClassHDefItem* object

**get\_classes\_names** (*update=False*)

Return the names of classes

**Parameters** **update** – True indicates to recompute the list. Maybe needed after using a My-Class.set\_name().

**Return type** a list of string

**get\_cm\_field** (*idx*)

Get a specific field by using an index

**Parameters** **idx** (*int*) – index of the field

**get\_cm\_method** (*idx*)

Get a specific method by using an index

**Parameters** **idx** (*int*) – index of the method

**get\_cm\_string** (*idx*)

Get a specific string by using an index

**Parameters** **idx** (*int*) – index of the string

**get\_cm\_type** (*idx*)

Get a specific type by using an index

**Parameters** **idx** (*int*) – index of the type

**get\_codes\_item** ()

This function returns the code item

**Return type** *CodeItem* object

**get\_debug\_info\_item** ()

This function returns the debug info item

**Return type** *DebugInfoItem* object

**get\_determineException** ()

**get\_determineNext** ()

**get\_field** (*name*)

Return a list all fields which corresponds to the regexp

**Parameters** `name` – the name of the field (a python regexp)

**Return type** a list with all `EncodedField` objects

**get\_field\_descriptor** (`class_name, field_name, descriptor`)

Return the specific field

**Parameters**

- `class_name` (*string*) – the class name of the field
- `field_name` (*string*) – the name of the field
- `descriptor` (*string*) – the descriptor of the field

**Return type** None or a `EncodedField` object

**get\_fields()**

Return all field objects

**Return type** a list of `EncodedField` objects

**get\_fields\_class** (`class_name`)

Return all fields of a specific class

**Parameters** `class_name` (*string*) – the class name

**Return type** a list with `EncodedField` objects

**get\_fields\_id\_item()**

This function returns the field id item

**Return type** `FieldHIDItem` object

**get\_format()**

**get\_format\_type()**

Return the type

**Return type** a string

**get\_header\_item()**

This function returns the header item

**Return type** `HeaderItem` object

**get\_len\_methods()**

Return the number of methods

**Return type** int

**get\_method** (`name`)

Return a list all methods which corresponds to the regexp

**Parameters** `name` – the name of the method (a python regexp)

**Return type** a list with all `EncodedMethod` objects

**get\_method\_by\_idx** (`idx`)

Return a specific method by using an index :param idx: the index of the method :type idx: int

**Return type** None or an `EncodedMethod` object

**get\_method\_descriptor** (`class_name, method_name, descriptor`)

Return the specific method

**Parameters**

- **class\_name** (*string*) – the class name of the method
- **method\_name** (*string*) – the name of the method
- **descriptor** (*string*) – the descriptor of the method

**Return type** None or a *EncodedMethod* object

**get\_methods()**  
Return all method objects

**Return type** a list of *EncodedMethod* objects

**get\_methods\_class(class\_name)**  
Return all methods of a specific class

**Parameters** **class\_name** (*string*) – the class name

**Return type** a list with *EncodedMethod* objects

**get\_methods\_descriptor(class\_name, method\_name)**  
Return the specific methods of the class

**Parameters**

- **class\_name** (*string*) – the class name of the method
- **method\_name** (*string*) – the name of the method

**Return type** None or a *EncodedMethod* object

**get\_methods\_id\_item()**  
This function returns the method id item

**Return type** *MethodHIdItem* object

**get\_operand\_html(operand, registers\_colors, colors, escape\_fct, wrap\_fct)**

**get\_regex\_strings(regular\_expressions)**  
Return all target strings matched the regex

**Parameters** **regular\_expressions** (*string*) – the python regex

**Return type** a list of strings matching the regex expression

**get\_string\_data\_item()**  
This function returns the string data item

**Return type** *StringDataItem* object

**get\_strings()**  
Return all strings

The strings will have escaped surrogates, if only a single high or low surrogate is found. Complete surrogates are put together into the representing 32bit character.

**Return type** a list with all strings used in the format (types, names ...)

**get\_strings\_unicode()**  
Return all strings

This method will return pure UTF-16 strings. This is the “exact” same string as used in Java. Those strings can be problematic for python, as they can contain surrogates as well as “broken” surrogate pairs, ie single high or low surrogates. Such a string can for example not be printed. To avoid such problems, there is an escape mechanism to detect such lonely surrogates and escape them in the string. Of course, this results in a different string than in the Java Source!

Use `get_strings()` as a general purpose and `get_strings_unicode()` if you require the exact string from the Java Source. You can always escape the string from `get_strings_unicode()` using the function `androguard.core.bytecodes.mutable_string()`

**Return type** a list with all strings used in the format (types, names ...)

**get\_vmanalysis()**

The Analysis Object should contain all the information required, including the DalvikVMFormats.

**list\_classes\_hierarchy()**

**print\_classes\_hierarchy()**

**save()**

Return the dex (with the modifications) into raw format (fix checksums) (beta: do not use !)

**Return type** string

**set\_decompiler(decompiler)**

**set\_vmanalysis(analysis)**

The Analysis Object should contain all the information required, including the DalvikVMFormats.

**show()**

Show the all information in the object

**class androguard.core.bytecodes.dvm.DebugInfoItem(buff, cm)**

Bases: object

**get\_bytecodes()**

**get\_line\_start()**

**get\_off()**

**get\_parameter\_names()**

**get\_parameters\_size()**

**get\_raw()**

**get\_translated\_parameter\_names()**

**reload()**

**show()**

**class androguard.core.bytecodes.dvm.DebugInfoItemEmpty(buff, cm)**

Bases: object

**get\_length()**

**get\_obj()**

**get\_off()**

**get\_raw()**

**reload()**

**set\_off(off)**

**show()**

**class androguard.core.bytecodes.dvm.EncodedAnnotation(buff, cm)**

Bases: object

This class can parse an encoded\_annotation of a dex file

### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the encoded\_annotation
- **cm** (*ClassManager*) – a ClassManager object

**get\_elements()**

Return the elements of the annotation, represented directly in-line (not as offsets)

**Return type** a list of *AnnotationElement* objects

**get\_length()**

**get\_obj()**

**get\_raw()**

**get\_size()**

Return the number of name-value mappings in this annotation

:rtype:int

**get\_type\_idx()**

Return the type of the annotation. This must be a class (not array or primitive) type

**Return type** int

**show()**

**class** androguard.core.bytecodes.dvm.**EncodedArray** (*buff, cm*)

Bases: object

This class can parse an encoded\_array of a dex file

### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the encoded\_array
- **cm** (*ClassManager*) – a ClassManager object

**get\_length()**

**get\_obj()**

**get\_raw()**

**get\_size()**

Return the number of elements in the array

**Return type** int

**get\_values()**

Return a series of size encoded\_value byte sequences in the format specified by this section, concatenated sequentially

**Return type** a list of *EncodedValue* objects

**show()**

**class** androguard.core.bytecodes.dvm.**EncodedArrayItem** (*buff, cm*)

Bases: object

This class can parse an encoded\_array\_item of a dex file

### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the encoded\_array\_item

- **cm** (*ClassManager*) – a ClassManager object

**get\_length()**  
**get\_obj()**  
**get\_off()**  
**get\_raw()**  
**get\_value()**  
    Return the bytes representing the encoded array value  
**Return type** a *EncodedArray* object

**reload()**  
**set\_off(*off*)**  
**show()**

**class** androguard.core.bytecodes.dvm.**EncodedCatchHandler** (*buff, cm*)  
Bases: object

This class can parse an encodedCatchHandler of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the encodedCatchHandler
- **cm** (*ClassManager*) – a ClassManager object

**getCatchAllAddr()**  
    Return the bytecode address of the catch-all handler. This element is only present if size is non-positive.

**Return type** int

**getHandlers()**  
    Return the stream of abs(size) encoded items, one for each caught type, in the order that the types should be tested.

**Return type** a list of *EncodedTypeAddrPair* objects

**get\_length()**  
**get\_off()**  
**get\_raw()**

**Return type** bytarray

**get\_size()**  
    Return the number of catch types in this list

**Return type** int

**set\_off(*off*)**  
**show()**

**class** androguard.core.bytecodes.dvm.**EncodedCatchHandlerList** (*buff, cm*)  
Bases: object

This class can parse an encodedCatchHandlerList of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the encodedCatchHandlerList

- **cm** (*ClassManager*) – a ClassManager object

**get\_length()**

**get\_list()**

Return the actual list of handler lists, represented directly (not as offsets), and concatenated sequentially

**Return type** a list of *EncodedCatchHandler* objects

**get\_obj()**

**get\_off()**

**get\_raw()**

**Return type** bytearray

**get\_size()**

Return the size of this list, in entries

**Return type** int

**set\_off(*off*)**

**show()**

**class** androguard.core.bytecodes.dvm.**EncodedField**(*buff, cm*)

Bases: object

This class can parse an encoded\_field of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the encoded field
- **cm** (*ClassManager*) – a ClassManager object

**adjust\_idx(*val*)**

**get\_access\_flags()**

Return the access flags of the field

**Return type** int

**get\_access\_flags\_string()**

Return the access flags string of the field

**Return type** string

**get\_class\_name()**

Return the class name of the field

**Return type** string

**get\_descriptor()**

Return the descriptor of the field

The descriptor of a field is the type of the field.

**Return type** string

**get\_field\_idx()**

Return the real index of the method

**Return type** int

**get\_field\_idx\_diff()**  
Return the index into the field\_ids list for the identity of this field (includes the name and descriptor), represented as a difference from the index of previous element in the list

**Return type** int

**get\_init\_value()**  
Return the init value object of the field

**Return type** *EncodedValue*

**get\_name()**  
Return the name of the field

**Return type** string

**get\_obj()**

**get\_raw()**

**get\_size()**

**load()**

**reload()**

**set\_init\_value(*value*)**

Setup the init value object of the field

**Parameters** **value** (*EncodedValue*) – the init value

**set\_name(*value*)**

**show()**

Display the information (with a pretty print) about the field

**class** androguard.core.bytecodes.dvm.**EncodedMethod** (*buff, cm*)

Bases: object

This class can parse an encoded\_method of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the encoded\_method
- **cm** (*ClassManager*) – a ClassManager object

**access\_flags = None**

access flags of the method

**add\_inote(*msg, idx, off=None*)**

Add a message to a specific instruction by using (default) the index of the address if specified

#### Parameters

- **msg** (*string*) – the message
- **idx** (*int*) – index of the instruction (the position in the list of the instruction)
- **off** (*int*) – address of the instruction

**add\_note(*msg*)**

Add a message to this method

**Parameters** **msg** (*string*) – the message

**adjust\_idx(*val*)**

`code_off = None`  
offset of the code section

`each_params_by_register(nb, proto)`  
From the Dalvik Bytecode documentation:

- > The N arguments to a method land in the last N registers > of the method's invocation frame, in order.
- > Wide arguments consume two registers.
- > Instance methods are passed a this reference as their first argument.

This method will print a description of the register usage to stdout.

**Parameters**

- `nb` – number of registers
- `proto` – descriptor of method

`get_access_flags()`  
Return the access flags of the method

**Return type** int

`get_access_flags_string()`  
Return the access flags string of the method

A description of all access flags can be found here: <https://source.android.com/devices/tech/dalvik/dex-format#access-flags>

**Return type** string

`get_address()`  
Return the offset from the start of the file to the code structure for this method, or 0 if this method is either abstract or native

**Return type** int

`get_class_name()`  
Return the class name of the method

**Return type** string

`get_code()`  
Return the code object associated to the method

**Return type** `DalvikCode` object or None if no Code

`get_code_off()`  
Return the offset from the start of the file to the code structure for this method, or 0 if this method is either abstract or native

**Return type** int

`get_debug()`  
Return the debug object associated to this method

**Return type** `DebugInfoItem`

`get_descriptor()`  
Return the descriptor of the method A method descriptor will have the form (A A A ...)R Where A are the arguments to the method and R is the return type. Basic types will have the short form, i.e. I for integer, V for void and class types will be named like a classname, e.g. Ljava/lang/String;.

Typical descriptors will look like this: ` (I)I // one integer argument, integer  
return (C)Z // one char argument, boolean as return (Ljava/lang/  
CharSequence; I)I // CharSequence and integer as argyument, integer  
as return (C)Ljava/lang/String; // char as argument, String as return.  
`

More information about type descriptors are found here: <https://source.android.com/devices/tech/dalvik/dex-format#typedescriptor>

**Return type** string

**get\_information()**

**get\_instruction(idx, off=None)**

Get a particular instruction by using (default) the index of the address if specified

**Parameters**

- **idx (int)** – index of the instruction (the position in the list of the instruction)
- **off (int)** – address of the instruction

**Return type** an *Instruction* object

**get\_instructions()**

Get the instructions

**Return type** a generator of each *Instruction* (or a cached list of instructions if you have setup instructions)

**get\_length()**

Return the length of the associated code of the method

**Return type** int

**get\_locals()**

**get\_method\_idx()**

Return the real index of the method

**Return type** int

**get\_method\_idx\_diff()**

Return index into the method\_ids list for the identity of this method (includes the name and descriptor), represented as a difference from the index of previous element in the lis

**Return type** int

**get\_name()**

Return the name of the method

**Return type** string

**get\_raw()**

**get\_short\_string()**

Return a shorter formatted String which encodes this method. The returned name has the form: <classname> <methodname> ([arguments ...])<returntype>

- All Class names are condensed to the actual name (no package).
- Access flags are not returned.
- <init> and <clinit> are NOT replaced by the classname!

This name might not be unique!

**Returns** str

**get\_size()**

**get\_source()**

**get\_triple()**

**is\_cached\_instructions()**

**load()**

**method\_idx\_diff = None**  
method index diff in the corresponding section

**reload()**

**set\_code\_idx(idx)**  
Set the start address of the buffer to disassemble

**Parameters** **idx** (*int*) – the index

**set\_instructions(instructions)**  
Set the instructions

**Parameters** **instructions** (a list of *Instruction*) – the list of instructions

**set\_name(value)**

**show()**  
Display the information (with a pretty print) about the method

**show\_info()**  
Display the basic information about the method

**show\_notes()**  
Display the notes about the method

**source()**  
Return the source code of this method

**Return type** string

**class** androguard.core.bytecodes.dvm.EncodedTypeAddrPair(*buff*)  
Bases: object

This class can parse an encoded\_type\_addr\_pair of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the encoded\_type\_addr\_pair
- **cm** (*ClassManager*) – a ClassManager object

**get\_addr()**  
Return the bytecode address of the associated exception handler

**Return type** int

**get\_length()**

**get\_obj()**

**get\_raw()**

**get\_type\_idx()**  
Return the index into the type\_ids list for the type of the exception to catch

**Return type** int

**show()**

**class** androguard.core.bytecodes.dvm.**EncodedValue** (*buff, cm*)  
Bases: object

This class can parse an encoded\_value of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the encoded\_value
- **cm** (*ClassManager*) – a ClassManager object

**get\_length()**

**get\_obj()**

**get\_raw()**

**get\_value()**

Return the bytes representing the value, variable in length and interpreted differently for different value\_type bytes, though always little-endian

**Return type** an object representing the value

**get\_value\_arg()**

**get\_value\_type()**

**show()**

**exception** androguard.core.bytecodes.dvm.**Error**  
Bases: Exception

Base class for exceptions in this module.

**class** androguard.core.bytecodes.dvm.**ExportObject**  
Bases: object

**class** androguard.core.bytecodes.dvm.**FakeNop** (*length*)  
Bases: *androguard.core.bytecodes.dvm.Instruction10x*

Simulate a nop instruction.

**get\_length()**

Return the length of the instruction

**Return type** int

**class** androguard.core.bytecodes.dvm.**FieldAnnotation** (*buff, cm*)  
Bases: object

This class can parse a field\_annotation of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the field\_annotation
- **cm** (*ClassManager*) – a ClassManager object

**get\_annotations\_off()**

Return the offset from the start of the file to the list of annotations for the field

**Return type** int

```
get_field_idx()  
    Return the index into the field_ids list for the identity of the field being annotated
```

**Return type** int

```
get_length()
```

```
get_obj()
```

```
get_off()
```

```
get_raw()
```

```
set_off(off)
```

```
show()
```

```
class androguard.core.bytecodes.dvm.FieldHIdItem(size, buff, cm)
```

Bases: object

This class can parse a list of field\_id\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the list of field\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

```
get(idx)
```

```
get_length()
```

```
get_obj()
```

```
get_off()
```

```
get_raw()
```

```
get_s()
```

```
reload()
```

```
set_off(off)
```

```
show()
```

```
class androguard.core.bytecodes.dvm.FieldIdItem(buff, cm)
```

Bases: object

This class can parse a field\_id\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the field\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

```
get_class_idx()
```

Return the index into the type\_ids list for the definer of this field

**Return type** int

```
get_class_name()
```

Return the class name of the field

**Return type** string

```
get_descriptor()
```

Return the descriptor of the field

```
    Return type string
get_length()
get_list()
get_name()
    Return the name of the field
    Return type string
get_name_idx()
    Return the index into the string_ids list for the name of this field
    Return type int
get_obj()
get_raw()
get_type()
    Return the type of the field
    Return type string
get_type_idx()
    Return the index into the type_ids list for the type of this field
    Return type int
reload()
show()

class androguard.core.bytecodes.dvm.FieldIdItemInvalid
Bases: object
    get_class_name()
    get_descriptor()
    get_list()
    get_name()
    get_type()
    show()

class androguard.core.bytecodes.dvm.FillArrayData(buff)
Bases: object
This class can parse a FillArrayData instruction

    Parameters buff – a Buff object which represents a buffer where the instruction is stored
    add_note(msg)
        Add a note to this instruction

            Parameters msg(objects (string)) – the message
    get_data()
        Return the data of this instruction (the payload)
        Return type string
    get_formatted_operands()
    get_hex()
```

```
get_length()
    Return the length of the instruction

    Return type int

get_name()
    Return the name of the instruction

    Return type string

get_notes()
    Get all notes from this instruction

    Return type a list of objects

get_op_value()
    Get the value of the opcode

    Return type int

get_operands(idx=-1)
get_output(idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()

show(pos)
    Print the instruction

show_buff(pos)
    Return the display of the instruction

    Return type string

class androguard.core.bytecodes.dvm.HeaderItem(size, buff, cm)
Bases: object

This class can parse an header_item of a dex file

Parameters

- buff (Buff object) – a string which represents a Buff object of the header_item
- cm (ClassManager) – a ClassManager object



get_length()
get_obj()
get_off()
get_raw()
reload()
set_off(off)
show()

class androguard.core.bytecodes.dvm.Instruction
Bases: object

This class represents a dalvik instruction

get_formatted_operands()
```

```
get_hex()
get_kind()
    Return the 'kind' argument of the instruction

    Return type int

get_length()
    Return the length of the instruction

    Return type int

get_literals()
    Return the associated literals

    Return type list of int

get_name()
    Return the name of the instruction

    Return type string

get_op_value()
    Return the value of the opcode

    Return type int

get_operands(idx=-1)
    Return all operands

    Return type list

get_output(idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()
    Return the object in a raw format

    Return type string

get_ref_kind()
    Return the value of the 'kind' argument

    Return type value

get_translated_kind()
    Return the translated value of the 'kind' argument

    Return type string

show(idx)
    Print the instruction

show_buff(idx)
    Return the display of the instruction

    Return type string

class androguard.core.bytecodes.dvm.Instruction10t(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 10t format

get_length()
    Return the length of the instruction
```

**Return type** int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw ()**  
Return the object in a raw format

**Return type** string

**get\_ref\_off ()**

**class androguard.core.bytecodes.dvm.Instruction10x (cm, buff)**  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 10x format

**get\_length ()**  
Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw ()**  
Return the object in a raw format

**Return type** string

**class androguard.core.bytecodes.dvm.Instruction11n (cm, buff)**  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 11n format

**get\_length ()**  
Return the length of the instruction

**Return type** int

**get\_literals ()**  
Return the associated literals

**Return type** list of int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw()**  
Return the object in a raw format

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction11x**(cm, buff)  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 11x format

**get\_length()**  
Return the length of the instruction

**Return type** int

**get\_operands**(idx=-1)  
Return all operands

**Return type** list

**get\_output**(idx=-1)  
Return an additional output of the instruction

**Return type** string

**get\_raw()**  
Return the object in a raw format

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction12x**(cm, buff)  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 12x format

**get\_length()**  
Return the length of the instruction

**Return type** int

**get\_operands**(idx=-1)  
Return all operands

**Return type** list

**get\_output**(idx=-1)  
Return an additional output of the instruction

**Return type** string

**get\_raw()**  
Return the object in a raw format

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction20bc**(cm, buff)  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 20bc format

**get\_length()**  
Return the length of the instruction

**Return type** int

```
get_operands (idx=-1)
    Return all operands

    Return type list

get_output (idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw ()
    Return the object in a raw format

    Return type string

class androguard.core.bytecodes.dvm.Instruction20t (cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 20t format

get_length ()
    Return the length of the instruction

    Return type int

get_operands (idx=-1)
    Return all operands

    Return type list

get_output (idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw ()
    Return the object in a raw format

    Return type string

get_ref_off ()

class androguard.core.bytecodes.dvm.Instruction21c (cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 21c format

get_length ()
    Return the length of the instruction

    Return type int

get_operands (idx=-1)
    Return all operands

    Return type list

get_output (idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw ()
    Return the object in a raw format

    Return type string
```

```
get_raw_string()
get_ref_kind()
    Return the value of the 'kind' argument

    Return type value

get_string()

class androguard.core.bytecodes.dvm.Instruction21h(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 21h format

get_formatted_operands()
get_length()
    Return the length of the instruction

    Return type int

get_literals()
    Return the associated literals

    Return type list of int

get_operands(idx=-1)
    Return all operands

    Return type list

get_output(idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()
    Return the object in a raw format

    Return type string

class androguard.core.bytecodes.dvm.Instruction21s(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 21s format

get_formatted_operands()
get_length()
    Return the length of the instruction

    Return type int

get_literals()
    Return the associated literals

    Return type list of int

get_operands(idx=-1)
    Return all operands

    Return type list

get_output(idx=-1)
    Return an additional output of the instruction

    Return type string
```

**get\_raw()**

Return the object in a raw format

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction21t**(cm, buff)

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 21t format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_operands(idx=-1)**

Return all operands

**Return type** list

**get\_output(idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

**get\_ref\_off()**

**class** androguard.core.bytecodes.dvm.**Instruction22b**(cm, buff)

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 22b format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_literals()**

Return the associated literals

**Return type** list of int

**get\_operands(idx=-1)**

Return all operands

**Return type** list

**get\_output(idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction22c**(cm, buff)

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 22c format

```
get_length()
    Return the length of the instruction

    Return type int

get_operands (idx=-1)
    Return all operands

    Return type list

get_output (idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()
    Return the object in a raw format

    Return type string

get_ref_kind()
    Return the value of the ‘kind’ argument

    Return type value

class androguard.core.bytecodes.dvm.Instruction22cs (cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 22cs format

get_length()
    Return the length of the instruction

    Return type int

get_operands (idx=-1)
    Return all operands

    Return type list

get_output (idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()
    Return the object in a raw format

    Return type string

get_ref_kind()
    Return the value of the ‘kind’ argument

    Return type value

class androguard.core.bytecodes.dvm.Instruction22s (cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 22s format

get_length()
    Return the length of the instruction

    Return type int

get_literals()
    Return the associated literals
```

**Return type** list of int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw ()**  
Return the object in a raw format

**Return type** string

**class androguard.core.bytecodes.dvm.Instruction22t (cm, buff)**  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 22t format

**get\_length ()**  
Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw ()**  
Return the object in a raw format

**Return type** string

**get\_ref\_off ()**

**class androguard.core.bytecodes.dvm.Instruction22x (cm, buff)**  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 22x format

**get\_length ()**  
Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw ()**  
Return the object in a raw format

**Return type** string

```
class androguard.core.bytecodes.dvm.Instruction23x(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction
```

This class represents all instructions which have the 23x format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_operands(idx=-1)**

Return all operands

**Return type** list

**get\_output(idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

```
class androguard.core.bytecodes.dvm.Instruction30t(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction
```

This class represents all instructions which have the 30t format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_operands(idx=-1)**

Return all operands

**Return type** list

**get\_output(idx=-1)**

Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

**get\_ref\_off()**

```
class androguard.core.bytecodes.dvm.Instruction31c(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction
```

This class represents all instructions which have the 31c format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_operands(idx=-1)**

Return all operands

**Return type** list

**get\_output** (*idx=-1*)  
Return an additional output of the instruction

**Return type** string

**get\_raw()**  
Return the object in a raw format

**Return type** string

**get\_raw\_string()**

**get\_ref\_kind()**  
Return the value of the ‘kind’ argument

**Return type** value

**get\_string()**  
Return the string associated to the ‘kind’ argument

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction3li** (*cm, buff*)  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 3li format

**get\_formatted\_operands()**

**get\_length()**  
Return the length of the instruction

**Return type** int

**get\_literals()**  
Return the associated literals

**Return type** list of int

**get\_operands** (*idx=-1*)  
Return all operands

**Return type** list

**get\_output** (*idx=-1*)  
Return an additional output of the instruction

**Return type** string

**get\_raw()**  
Return the object in a raw format

**Return type** string

**class** androguard.core.bytecodes.dvm.**Instruction31t** (*cm, buff*)  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 31t format

**get\_length()**  
Return the length of the instruction

**Return type** int

```
get_operands(idx=-1)
    Return all operands

    Return type list

get_output(idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()
    Return the object in a raw format

    Return type string

get_ref_off()

class androguard.core.bytecodes.dvm.Instruction32x(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 32x format

get_length()
    Return the length of the instruction

    Return type int

get_operands(idx=-1)
    Return all operands

    Return type list

get_output(idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()
    Return the object in a raw format

    Return type string

class androguard.core.bytecodes.dvm.Instruction35c(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 35c format

get_length()
    Return the length of the instruction

    Return type int

get_operands(idx=-1)
    Return all operands

    Return type list

get_output(idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()
    Return the object in a raw format

    Return type string
```

**get\_ref\_kind()**

Return the value of the ‘kind’ argument

**Return type** value

**class** androguard.core.bytecodes.dvm.**Instruction35mi** (*cm, buff*)

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 35mi format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_operands** (*idx=-1*)

Return all operands

**Return type** list

**get\_output** (*idx=-1*)

Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

**get\_ref\_kind()**

Return the value of the ‘kind’ argument

**Return type** value

**class** androguard.core.bytecodes.dvm.**Instruction35ms** (*cm, buff*)

Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 35ms format

**get\_length()**

Return the length of the instruction

**Return type** int

**get\_operands** (*idx=-1*)

Return all operands

**Return type** list

**get\_output** (*idx=-1*)

Return an additional output of the instruction

**Return type** string

**get\_raw()**

Return the object in a raw format

**Return type** string

**get\_ref\_kind()**

Return the value of the ‘kind’ argument

**Return type** value

```
class androguard.core.bytecodes.dvm.Instruction3rc(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction
```

This class represents all instructions which have the 3rc format

```
get_length()
```

Return the length of the instruction

**Return type** int

```
get_operands(idx=-1)
```

Return all operands

**Return type** list

```
get_output(idx=-1)
```

Return an additional output of the instruction

**Return type** string

```
get_raw()
```

Return the object in a raw format

**Return type** string

```
get_ref_kind()
```

Return the value of the ‘kind’ argument

**Return type** value

```
class androguard.core.bytecodes.dvm.Instruction3rmi(cm, buff)
```

Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 3rmi format

```
get_length()
```

Return the length of the instruction

**Return type** int

```
get_operands(idx=-1)
```

Return all operands

**Return type** list

```
get_output(idx=-1)
```

Return an additional output of the instruction

**Return type** string

```
get_raw()
```

Return the object in a raw format

**Return type** string

```
get_ref_kind()
```

Return the value of the ‘kind’ argument

**Return type** value

```
class androguard.core.bytecodes.dvm.Instruction3rms(cm, buff)
```

Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 3rms format

```
get_length()
```

Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw ()**  
Return the object in a raw format

**Return type** string

**get\_ref\_kind ()**  
Return the value of the ‘kind’ argument

**Return type** value

**class androguard.core.bytecodes.dvm.Instruction40sc (cm, buff)**  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 40sc format

**get\_length ()**  
Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

**get\_output (idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_raw ()**  
Return the object in a raw format

**Return type** string

**get\_ref\_kind ()**  
Return the value of the ‘kind’ argument

**Return type** value

**class androguard.core.bytecodes.dvm.Instruction41c (cm, buff)**  
Bases: *androguard.core.bytecodes.dvm.Instruction*

This class represents all instructions which have the 41c format

**get\_length ()**  
Return the length of the instruction

**Return type** int

**get\_operands (idx=-1)**  
Return all operands

**Return type** list

```
get_output (idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw ()
    Return the object in a raw format

    Return type string

get_ref_kind ()
    Return the value of the ‘kind’ argument

    Return type value

class androguard.core.bytecodes.dvm.Instruction511 (cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 511 format

get_formatted_operands ()
get_length ()
    Return the length of the instruction

    Return type int

get_literals ()
    Return the associated literals

    Return type list of int

get_operands (idx=-1)
    Return all operands

    Return type list

get_output (idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw ()
    Return the object in a raw format

    Return type string

class androguard.core.bytecodes.dvm.Instruction52c (cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 52c format

get_length ()
    Return the length of the instruction

    Return type int

get_operands (idx=-1)
    Return all operands

    Return type list

get_output (idx=-1)
    Return an additional output of the instruction

    Return type string
```

```
get_raw()
    Return the object in a raw format

    Return type string

get_ref_kind()
    Return the value of the ‘kind’ argument

    Return type value

class androguard.core.bytecodes.dvm.Instruction5rc(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents all instructions which have the 5rc format

get_length()
    Return the length of the instruction

    Return type int

get_operands(idx=-1)
    Return all operands

    Return type list

get_output(idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()
    Return the object in a raw format

    Return type string

get_ref_kind()
    Return the value of the ‘kind’ argument

    Return type value

class androguard.core.bytecodes.dvm.InstructionInvalid(cm, buff)
Bases: androguard.core.bytecodes.dvm.Instruction

This class represents an invalid instruction

get_length()
    Return the length of the instruction

    Return type int

get_name()
    Return the name of the instruction

    Return type string

get_operands(idx=-1)
    Return all operands

    Return type list

get_output(idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw()
    Return the object in a raw format
```

**Return type** string

**exception** androguard.core.bytecodes.dvm.InvalidInstruction  
Bases: *androguard.core.bytecodes.dvm.Error*

**class** androguard.core.bytecodes.dvm.LinearSweepAlgorithm  
Bases: object

This class is used to disassemble a method. The algorithm used by this class is linear sweep.

**get\_instructions**(cm, size, insn, idx)

**Parameters**

- **cm** (*ClassManager* object) – a ClassManager object
- **size** (*int*) – the total size of the buffer
- **insn** (*string*) – a raw buffer where are the instructions
- **idx** (*int*) – a start address in the buffer

**Return type** a generator of *Instruction* objects

**class** androguard.core.bytecodes.dvm.MapItem(buff, cm)

Bases: object

**get\_item()**

**get\_length()**

**get\_obj()**

**get\_off()**

**get\_offset()**

**get\_raw()**

**get\_size()**

**get\_type()**

**parse()**

**reload()**

**set\_item(item)**

**show()**

**class** androguard.core.bytecodes.dvm.MapList(cm, off, buff)

Bases: object

This class can parse the “map\_list” of the dex format

<https://source.android.com/devices/tech/dalvik/dex-format#map-list>

**get\_class\_manager()**

**get\_item\_type(ttype)**

Get a particular item type

**Parameters** **ttype** – a string which represents the desired type

**Return type** None or the item object

**get\_length()**

**get\_obj()**

```
get_off()
get_raw()
reload()
set_off(off)
show()
    Print with a pretty display the MapList object

class androguard.core.bytecodes.dvm.MethodAnnotation(buff, cm)
Bases: object
```

This class can parse a method\_annotation of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the method\_annotation
- **cm** (*ClassManager*) – a ClassManager object

**get\_annotations\_off()**

Return the offset from the start of the file to the list of annotations for the method

**Return type** int

**get\_length()**

**get\_method\_idx()**

Return the index into the method\_ids list for the identity of the method being annotated

**Return type** int

**get\_obj()**

**get\_off()**

**get\_raw()**

**set\_off(*off*)**

**show()**

```
class androguard.core.bytecodes.dvm.MethodHIdItem(size, buff, cm)
Bases: object
```

This class can parse a list of method\_id\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the list of method\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

**get(*idx*)**

**get\_length()**

**get\_obj()**

**get\_off()**

**get\_raw()**

**reload()**

**set\_off(*off*)**

```
show()

class androguard.core.bytecodes.dvm.MethodIdItem(buff, cm)
Bases: object
```

This class can parse a method\_id\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the method\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_class\_idx()**

Return the index into the type\_ids list for the definer of this method

**Return type** int

**get\_class\_name()**

Return the class name of the method

**Return type** string

**get\_descriptor()**

Return the descriptor

**Return type** string

**get\_length()**

**get\_list()**

**get\_name()**

Return the name of the method

**Return type** string

**get\_name\_idx()**

Return the index into the string\_ids list for the name of this method

**Return type** int

**get\_obj()**

**get\_proto()**

Return the prototype of the method

**Return type** string

**get\_proto\_idx()**

Return the index into the proto\_ids list for the prototype of this method

**Return type** int

**get\_raw()**

**get\_real\_descriptor()**

Return the real descriptor (i.e. without extra spaces)

**Return type** string

**get\_triple()**

**reload()**

**show()**

```
class androguard.core.bytecodes.dvm.MethodIdItemInvalid
Bases: object
```

```
get_class_name()
get_descriptor()
get_list()
get_name()
get_proto()
show()
```

```
class androguard.core.bytecodes.dvm.OdexDependencies(buff)
Bases: object
```

This class can parse the odex dependencies

**Parameters** **buff** – a Buff object string which represents the odex dependencies

```
get_dependencies()
Return the list of dependencies
```

**Return type** a list of strings

```
get_raw()
```

```
class androguard.core.bytecodes.dvm.OdexHeaderItem(buff)
Bases: object
```

This class can parse the odex header

**Parameters** **buff** – a Buff object string which represents the odex dependencies

```
get_raw()
```

```
show()
```

```
class androguard.core.bytecodes.dvm.OffObj(o)
Bases: object
```

```
class androguard.core.bytecodes.dvm.PackedSwitch(buff)
Bases: object
```

This class can parse a PackedSwitch instruction

**Parameters** **buff** – a Buff object which represents a buffer where the instruction is stored

```
add_note(msg)
Add a note to this instruction
```

**Parameters** **msg** (*objects (string)*) – the message

```
get_formatted_operands()
```

```
get_hex()
```

```
get_keys()
Return the keys of the instruction
```

**Return type** a list of long

```
get_length()
```

```
get_name()
Return the name of the instruction
```

**Return type** string

**get\_notes()**  
Get all notes from this instruction

**Return type** a list of objects

**get\_op\_value()**  
Get the value of the opcode

**Return type** int

**get\_operands(idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_output(idx=-1)**  
Return an additional output of the instruction

**rtype** string

**get\_raw()**

**get\_targets()**  
Return the targets (address) of the instruction

**Return type** a list of long

**get\_values()**

**show(pos)**  
Print the instruction

**show\_buff(pos)**  
Return the display of the instruction

**Return type** string

**class androguard.core.bytecodes.dvm.ParameterAnnotation(buff, cm)**  
Bases: object

This class can parse a parameter\_annotation of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the parameter\_annotation
- **cm** (*ClassManager*) – a ClassManager object

**get\_annotations\_off()**  
Return the offset from the start of the file to the list of annotations for the method parameters

**Return type** int

**get\_length()**

**get\_method\_idx()**  
Return the index into the method\_ids list for the identity of the method whose parameters are being annotated

**Return type** int

**get\_obj()**

**get\_off()**

```
get_raw()
set_off(off)
show()

class androguard.core.bytecodes.dvm.ProtoHIdItem(size, buff, cm)
Bases: object
```

This class can parse a list of proto\_id\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the list of proto\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

```
get(idx)
```

```
get_length()
```

```
get_obj()
```

```
get_off()
```

```
get_raw()
```

```
reload()
```

```
set_off(off)
```

```
show()
```

```
class androguard.core.bytecodes.dvm.ProtoIdItem(buff, cm)
```

Bases: object

This class can parse a proto\_id\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the proto\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

```
get_length()
```

```
get_obj()
```

```
get_parameters_off()
```

Return the offset from the start of the file to the list of parameter types for this prototype, or 0 if this prototype has no parameters

**Return type** int

```
get_parameters_off_value()
```

Return the string associated to the parameters\_off

**Return type** string

```
get_raw()
```

```
get_return_type_idx()
```

Return the index into the type\_ids list for the return type of this prototype

**Return type** int

```
get_return_type_idx_value()
```

Return the string associated to the return\_type\_idx

**Return type** string

**get\_shorty\_idx()**  
Return the index into the string\_ids list for the short-form descriptor string of this prototype

**Return type** int

**get\_shorty\_idx\_value()**  
Return the string associated to the shorty\_idx

**Return type** string

**reload()**

**show()**

**class** androguard.core.bytecodes.dvm.**ProtoIdItemInvalid**  
Bases: object

**get\_params()**

**get\_return\_type()**

**get\_shorty()**

**show()**

**class** androguard.core.bytecodes.dvm.**SparseSwitch**(buff)  
Bases: object

This class can parse a SparseSwitch instruction

**Parameters** **buff** – a Buff object which represents a buffer where the instruction is stored

**add\_note(msg)**  
Add a note to this instruction

**Parameters** **msg**(objects (string)) – the message

**get\_formatted\_operands()**

**get\_hex()**

**get\_keys()**  
Return the keys of the instruction

**Return type** a list of long

**get\_length()**

**get\_name()**  
Return the name of the instruction

**Return type** string

**get\_notes()**  
Get all notes from this instruction

**Return type** a list of objects

**get\_op\_value()**  
Get the value of the opcode

**Return type** int

**get\_operands(idx=-1)**  
Return an additional output of the instruction

**Return type** string

**get\_output** (*idx=-1*)  
Return an additional output of the instruction

**Return type** string

**get\_raw** ()

**get\_targets** ()  
Return the targets (address) of the instruction

**Return type** a list of long

**get\_values** ()

**show** (*pos*)  
Print the instruction

**show\_buff** (*pos*)  
Return the display of the instruction

**Return type** string

**class** androguard.core.bytecodes.dvm.StringDataItem (*buff, cm*)  
Bases: object

This class can parse a string\_data\_item of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the string\_data\_item
- **cm** (*ClassManager*) – a ClassManager object

**get** ()  
Returns a printable string. In this case, all lonely surrogates are escaped, thus are represented in the string as 6 characters: ud853 Valid surrogates are encoded as 32bit values, ie. .

**get\_data** ()  
Return a series of MUTF-8 code units (a.k.a. octets, a.k.a. bytes) followed by a byte of value 0

**Return type** string

**get\_length** ()  
Get the length of the raw string including the ULEB128 coded length and the null byte terminator

**Returns** int

**get\_obj** ()

**get\_off** ()

**get\_raw** ()  
Returns the raw string including the ULEB128 coded length and null byte string terminator

**Returns** bytes

**get\_unicode** ()  
Returns an Unicode String This is the actual string. Beware that some strings might be not decodeable with usual UTF-16 decoder, as they use surrogates that are not supported by python.

**get\_utf16\_size** ()  
Return the size of this string, in UTF-16 code units  
:rtype:int

```
reload()
set_off(off)
show()

class androguard.core.bytecodes.dvm.StringIdItem(buff, cm)
Bases: object
```

This class can parse a string\_id\_item of a dex file

#### Parameters

- **buff** (*Buff object*) – a string which represents a Buff object of the string\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

```
get_length()
```

```
get_obj()
```

```
get_off()
```

```
get_raw()
```

```
get_string_data_off()
```

Return the offset from the start of the file to the string data for this item

**Return type** int

```
reload()
```

```
set_off(off)
```

```
show()
```

```
class androguard.core.bytecodes.dvm.TryItem(buff, cm)
```

Bases: object

This class represents the try\_item format

#### Parameters

- **buff** (*string*) – a raw buffer where are the try\_item format
- **cm** (*ClassManager* object) – the ClassManager

```
get_handler_off()
```

Get the offset in bytes from the start of the associated *EncodedCatchHandlerList* to the *EncodedCatchHandler* for this entry.

**Return type** int

```
get_insn_count()
```

Get the number of 16-bit code units covered by this entry

**Return type** int

```
get_length()
```

```
get_off()
```

```
get_raw()
```

```
get_start_addr()
```

Get the start address of the block of code covered by this entry. The address is a count of 16-bit code units to the start of the first covered instruction.

**Return type** int

**set\_off** (*off*)

**class** androguard.core.bytecodes.dvm.TypeHIdItem (*size, buff, cm*)  
Bases: object

This class can parse a list of type\_id\_item of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the list of type\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

**get** (*idx*)

**get\_length** ()

**get\_obj** ()

**get\_off** ()

**get\_raw** ()

**get\_type** ()

Return the list of type\_id\_item

**Return type** a list of *TypeIdItem* objects

**reload** ()

**set\_off** (*off*)

**show** ()

**class** androguard.core.bytecodes.dvm.TypeIdItem (*buff, cm*)  
Bases: object

This class can parse a type\_id\_item of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the type\_id\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_descriptor\_idx** ()

Return the index into the string\_ids list for the descriptor string of this type

**Return type** int

**get\_descriptor\_idx\_value** ()

Return the string associated to the descriptor

**Return type** string

**get\_length** ()

**get\_obj** ()

**get\_raw** ()

**reload** ()

**show** ()

**class** androguard.core.bytecodes.dvm.TypeItem (*buff, cm*)  
Bases: object

This class can parse a type\_item of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the type\_item
- **cm** (*ClassManager*) – a ClassManager object

**get\_length()****get\_obj()****get\_raw()****get\_string()**

Return the type string

**Return type** string**get\_type\_idx()**

Return the index into the type\_ids list

**Return type** int**show()****class** androguard.core.bytecodes.dvm.TypeList(*buff, cm*)

Bases: object

This class can parse a type\_list of a dex file

**Parameters**

- **buff** (*Buff object*) – a string which represents a Buff object of the type\_list
- **cm** (*ClassManager*) – a ClassManager object

**get\_length()****get\_list()**

Return the list of TypeItem

**Return type** a list of *TypeItem* objects**get\_obj()****get\_off()****get\_pad()**

Return the alignment string

**Return type** string**get\_raw()****get\_size()**

Return the size of the list, in entries

**Return type** int**get\_string()**

Return the concatenation of all strings

**Return type** string**get\_type\_list\_off()**

Return the offset of the item

**Return type** int**reload()**

```
set_off (off)
show ()

class androguard.core.bytecodes.dvm.Unresolved(cm, data)
Bases: androguard.core.bytecodes.dvm.Instruction

get_length ()
    Return the length of the instruction

    Return type int

get_name ()
    Return the name of the instruction

    Return type string

get_op_value ()
    Return the value of the opcode

    Return type int

get_operands (idx=-1)
    Return all operands

    Return type list

get_output (idx=-1)
    Return an additional output of the instruction

    Return type string

get_raw ()
    Return the object in a raw format

    Return type string

androguard.core.bytecodes.dvm.clean_name_instruction(instruction)
androguard.core.bytecodes.dvm.determineException(vm, m)
androguard.core.bytecodes.dvm.determineNext(i, end, m)
androguard.core.bytecodes.dvm.get_access_flags_string(value)
    Transform an access flag field to the corresponding string

    Parameters value (int) – the value of the access flags

    Return type string

androguard.core.bytecodes.dvm.get_byte(buff)
androguard.core.bytecodes.dvm.get_bytecodes_method(dex_object, ana_object, method)
androguard.core.bytecodes.dvm.get_bytecodes_methodx(method, mx)
androguard.core.bytecodes.dvm.get_extented_instruction(cm, op_value, buff)
androguard.core.bytecodes.dvm.get_instruction(cm, op_value, buff, odex=False)
androguard.core.bytecodes.dvm.get_instruction_payload(op_value, buff)
androguard.core.bytecodes.dvm.get_kind(cm, kind, value)

    Return the value of the ‘kind’ argument

    Parameters

        • cm (ClassManager) – a ClassManager object
```

- **kind** (*int*) – the type of the ‘kind’ argument
- **value** (*int*) – the value of the ‘kind’ argument

**Return type** string

`androguard.core.bytecodes.dvm.get_optimized_instruction(cm, op_value, buff)`

`androguard.core.bytecodes.dvm.get_params_info(nb, proto)`

`androguard.core.bytecodes.dvm.get_sbyte(buff)`

`androguard.core.bytecodes.dvm.get_type(atype, size=None)`

Retrieve the type of a descriptor (e.g : I)

`androguard.core.bytecodes.dvm.read_null_terminated_string(f)`

Read a null terminated string from a file-like object.

**Parameters** **f** – file-like object

**Return type** bytearray

`androguard.core.bytecodes.dvm.readsleb128(buff)`

`androguard.core.bytecodes.dvm.readuleb128(buff)`

`androguard.core.bytecodes.dvm.readuleb128p1(buff)`

`androguard.core.bytecodes.dvm.readusleb128(buff)`

`androguard.core.bytecodes.dvm.static_operand_instruction(instruction)`

`androguard.core.bytecodes.dvm.writesleb128(value)`

`androguard.core.bytecodes.dvm.writeuleb128(value)`

## androguard.core.bytecodes.axml module

**class** `androguard.core.bytecodes.axml.ARSCComplex(buff, parent=None)`

Bases: object

**class** `androguard.core.bytecodes.axml.ARSCHeader(buff)`

Bases: object

**SIZE = 8**

**class** `androguard.core.bytecodes.axml.ARSCPParser(raw_buff)`

Bases: object

Parser for resource.arsc files

**class** `ResourceResolver(android_resources, config=None)`

Bases: object

`put_ate_value(result, ate, config)`

`put_item_value(result, item, config, complex_)`

`resolve(res_id)`

`get_bool_resources(package_name, locale='\x00\x00')`

`get_color_resources(package_name, locale='\x00\x00')`

`get_dimen_resources(package_name, locale='\x00\x00')`

`get_id(package_name, rid, locale='\x00\x00')`

```
get_id_resources (package_name, locale='\\x00\\x00')
get_integer_resources (package_name, locale='\\x00\\x00')
get_items (package_name)
get_locales (package_name)
get_packages_names ()
get_public_resources (package_name, locale='\\x00\\x00')
get_res_configs (rid, config=None, fallback=True)
```

Return the resources found with the ID `rid` and select the right one based on the configuration, or return all if no configuration was set.

But we try to be generous here and at least try to resolve something: This method uses a fallback to return at least one resource (the first one in the list) if more than one items are found and the default config is used and no default entry could be found.

This is usually a bad sign (i.e. the developer did not follow the android documentation: <https://developer.android.com/guide/topics/resources/localization.html#failing2>) In practise an app might just be designed to run on a single locale and thus only has those locales set.

You can disable this fallback behaviour, to just return exactly the given result.

#### Parameters

- `rid` – resource id as int
- `config` – a config to resolve from, or None to get all results
- `fallback` – Enable the fallback for resolving default configuration (default: True)

Returns a list of ARSCResTableConfig: ARSCResTableEntry

```
get_res_id_by_key (package_name, resource_type, key)
get_resolved_res_configs (rid, config=None)
get_resolved_strings ()
get_resource_bool (ate)
get_resource_color (ate)
get_resource_dimen (ate)
get_resource_id (ate)
get_resource_integer (ate)
get_resource_string (ate)
get_resource_style (ate)
get_string (package_name, name, locale='\\x00\\x00')
get_string_resources (package_name, locale='\\x00\\x00')
get_strings_resources ()
get_type_configs (package_name, type_name=None)
get_types (package_name, locale)

class androguard.core.bytecodes.axml.ARSCResStringPoolRef (buff, parent=None)
Bases: object
```

```
format_value()
get_data()
get_data_type()
get_data_type_string()
get_data_value()
is_reference()

class androguard.core.bytecodes.axml.ARSCResTableConfig(buff=None, **kwargs)
Bases: object

    classmethod default_config()

    get_country()
    get_density()
    get_language()

class androguard.core.bytecodes.axml.ARSCResTableEntry(buff, mResId, parent=None)
Bases: object

See https://github.com/LineageOS/android\_frameworks\_base/blob/df2898d9ce306bb2fe922d3beaa34a9cf6873d27/include/androidfw/ResourceTypes.h#L1370

    FLAG_COMPLEX = 1
    FLAG_PUBLIC = 2
    FLAG_WEAK = 4
    get_index()
    get_key_data()
    get_value()
    is_complex()
    is_public()
    is_weak()

class androguard.core.bytecodes.axml.ARSCResTablePackage(buff, header)
Bases: object

    get_name()

class androguard.core.bytecodes.axml.ARSCResType(buff, parent=None)
Bases: object

    get_package_name()
    get_type()

class androguard.core.bytecodes.axml.ARSCResTypeSpec(buff, parent=None)
Bases: object

class androguard.core.bytecodes.axml.AXMLParser(raw_buff)
Bases: object

    doNext()
    getAttributeCount()
```

```
getAttributeName (index)
getAttributeOffset (index)
getAttributePrefix (index)
getAttributeValue (index)
    This function is only used to look up strings All other work is made by format_value # FIXME should
    unite those functions :param index: :return:
getAttributeValueData (index)
getAttributeValueType (index)
getName ()
getNamespaceCount (pos)
getNamespacePrefix (pos)
getNamespaceUri (pos)
getPrefix ()
getPrefixByUri (uri)
getText ()
getXMLNS ()
isValid()
reset()

class androguard.core.bytecodes.axml.AXMLPrinter (raw_buff)
Bases: object

    Converter for AXML Files into a XML string

getAttributeValue (index)
    Wrapper function for format_value to resolve the actual value of an attribute in a tag :param index: :return:
getPrefix (prefix)
get_buff ()
get_xml ()
    Get the XML as an UTF-8 string

    Returns str

get_xml_obj ()
    Get the XML as an ElementTree object

    Returns Element

is_packed()
    Return True if we believe that the AXML file is packed If it is, we can not be sure that the AXML file can
    be read by a XML Parser

    Returns boolean

class androguard.core.bytecodes.axml.PackageContext (current_package,           string-
                                         pool_main,           mTableStrings,
                                         mKeyStrings)
Bases: object

get_mResId()
```

```
get_package_name()
set_mResId(mResId)

class androguard.core.bytecodes.axml.StringBlock(buff, header)
Bases: object

StringBlock is a CHUNK inside an AXML File It contains all strings, which are used by referecing to ID's
TODO might migrate this block into the ARSCParser, as it is not a "special" block but a normal tag.

decode16(offset)
decode8(offset)
decodeLength(offset, sizeof_char)
decode_bytes(data, encoding, str_len)
getString(idx)
getStyle(idx)
show()

androguard.core.bytecodes.axml.complexToFloat(xcomplex)
androguard.core.bytecodes.axml.format_value(_type, _data, lookup_string=<function
<lambda>>)
androguard.core.bytecodes.axml.getPackage(i)
androguard.core.bytecodes.axml.get_arsc_info(arscobj)
Return a string containing all resources packages ordered by packagename, locale and type.

Parameters arscobj – ARSCParser

Returns a string

androguard.core.bytecodes.axml.long2int(l)
```

## androguard.core.bytecodes.mutf8 module

```
class androguard.core.bytecodes.mutf8.PeekIterator(s)
Bases: object

A quick'n'dirty variant of an Iterator that has a special function peek, which will return the next object but not
consume it.

idx = 0
next()
peek()

androguard.core.bytecodes.mutf8.chr(val)
Patched Version of builtins.chr, to work with narrow python builds In those versions, the function unichr does
not work with inputs >0x10000

This seems to be a problem usually on older windows builds.

Parameters val – integer value of character

Returns character
```

```
androguard.core.bytecodes.mutf8.decode(b)
Decode bytes as MUTF-8 See https://docs.oracle.com/javase/6/docs/api/java/io/DataInput.html#modified-utf-8
for more information
```

Surrogates will be returned as two 16 bit characters.

**Parameters** `b` – bytes to decode

**Return type** unicode (py2), str (py3) of 16bit chars

```
androguard.core.bytecodes.mutf8.patch_string(s)
```

Reorganize a String in such a way that surrogates are printable and lonely surrogates are escaped.

**Parameters** `s` – input string

**Returns** string with escaped lonely surrogates and 32bit surrogates

## Module contents

### androguard.core.data package

#### Submodules

#### androguard.core.data.data module

```
class androguard.core.data.data.ApkViewer(a)
Bases: object

    export_to_gml()

class androguard.core.data.data.DexViewer(vmx, vmx, gvmx)
Bases: object

    add_edge(i, id_i, j, id_j, l_eid, val)
    add_exception_node(exception, id_i)
    add_method_node(i, id_i)
    add_node(i, id_i)
    export_to_gml()
    new_id(i, l)

class androguard.core.data.data.Directory(name)
Bases: object

    set_color(color)

class androguard.core.data.data.File(name, file_type, file_crc)
Bases: object

androguard.core.data.data.splitall(path, z)
```

## Module contents

### androguard.core.resources package

#### Submodules

##### androguard.core.resources.public module

#### Module contents

#### Submodules

##### androguard.core.androconf module

```
class androguard.core.androconf.Color
    Bases: object
```

```
    Black = '\x1b[30m'
```

```
    Blue = '\x1b[34m'
```

```
    Bold = '\x1b[1m'
```

```
    Cyan = '\x1b[36m'
```

```
    Green = '\x1b[32m'
```

```
    Grey = '\x1b[37m'
```

```
    Normal = '\x1b[0m'
```

```
    Purple = '\x1b[35m'
```

```
    Red = '\x1b[31m'
```

```
    Yellow = '\x1b[33m'
```

```
class androguard.core.androconf.Configuration
    Bases: object
```

```
    instance = {'BIN_DED': 'ded.sh', 'BIN_DEX2JAR': 'dex2jar.sh', 'BIN_FERNFLOWER': 'fernfl
```

```
exception androguard.core.androconf.InvalidResourceError
```

```
    Bases: Exception
```

```
    Invalid Resource Erorr is thrown by load_api_specific_resource_module
```

```
androguard.core.androconf.color_range(startcolor, goalcolor, steps)
```

```
    wrapper for interpolate_tuple that accepts colors as html ("#CCCCCC" and such)
```

```
androguard.core.androconf.default_colors(obj)
```

```
androguard.core.androconf.disable_colors()
```

```
    Disable colors from the output (color = normal)
```

```
androguard.core.androconf.enable_colors(colors)
```

```
androguard.core.androconf.interpolate_tuple(startcolor, goalcolor, steps)
```

```
    Take two RGB color sets and mix them over a specified number of steps. Return the list
```

`androguard.core.androconf.is_android(filename)`

Return the type of the file

`@param filename : the filename @rtype : "APK", "DEX", None`

`androguard.core.androconf.is_android_raw(raw)`

Returns a string that describes the type of file, for common Android specific formats

`androguard.core.androconf.is_ascii_problem(s)`

Test if a string contains other chars than ASCII

**Parameters** `s` – a string to test

**Returns** True if string contains other chars than ASCII, False otherwise

`androguard.core.androconf.load_api_specific_resource_module(resource_name,`

`api=None)`

Load the module from the JSON files and return a dict, which might be empty if the resource could not be loaded.

If no api version is given, the default one from the CONF dict is used.

**Parameters**

- `resource_name` – Name of the resource to load
- `api` – API version

**Returns** dict

`androguard.core.androconf.make_color_tuple(color)`

turn something like "#000000" into 0,0,0 or "#FFFFFF into "255,255,255"

`androguard.core.androconf.remove_colors()`

Remove colors from the output (no escape sequences)

`androguard.core.androconf.rmtree(directory)`

Recursively delete a directory

**Parameters** `directory` – directory to remove

`androguard.core.androconf.save_colors()`

`androguard.core.androconf.set_options(key, value)`

`androguard.core.androconf.show_logging(level=20)`

enable log messages on stdout

We will catch all messages here! From all loggers...

## androguard.core.bytecode module

`class androguard.core.bytecode.Buff(offset, buff)`

Bases: object

`class androguard.core.bytecode.BuffHandle(buff)`

Bases: object

`end()`

`get_idx()`

`read(size)`

`readNullString(size)`

```
read_at (offset, size)
read_b (size)
set_idx (idx)
size ()

androguard.core.bytecode.Exit (msg)
androguard.core.bytecode.FormatClassToJava (i)
    Transform a typical xml format class into java format

Parameters i – the input class name

Return type string

androguard.core.bytecode.FormatClassToPython (i)
androguard.core.bytecode.FormatDescriptorToPython (i)
androguard.core.bytecode.FormatNameToPython (i)

class androguard.core.bytecode.MethodBC
    Bases: object

    show (value)

class androguard.core.bytecode.Node (n, s)
    Bases: object

    prettyShow (m_a, basic_blocks, notes={})
    prettyShowEx (exceptions)

class androguard.core.bytecode.SV (size, buff)
    Bases: object

    get_value ()
    get_value_buff ()
    set_value (attr)

class androguard.core.bytecode.SVs (size, ntuple, buff)
    Bases: object

    get_value ()
    get_value_buff ()
    set_value (attr)

class androguard.core.bytecode.TmpBlock (name)
    Bases: object

    get_name ()

androguard.core.bytecode.disable_print_colors ()
androguard.core.bytecode.enable_print_colors (colors)
androguard.core.bytecode.method2dot (mx, colors=None)
    Export analysis method to dot format

Parameters

    • mx – MethodAnalysis
```

- **colors** – dict of colors to use, if colors is None the default colors are used

**Returns** a string which contains the dot graph

```
androguard.core.bytecode.method2format (output, _format='png', mx=None, raw=None)
```

Export method to a specific file format

@param output : output filename @param \_format : format type (png, jpg ...) (default : png) @param mx : specify the MethodAnalysis object @param raw : use directly a dot raw buffer if None

```
androguard.core.bytecode.method2jpg (output, mx, raw=False)
```

Export method to a jpg file format

### Parameters

- **output** (*string*) – output filename
- **mx** (MethodAnalysis object) – specify the MethodAnalysis object
- **raw** (*string*) – use directly a dot raw buffer (optional)

```
androguard.core.bytecode.method2json (mx, directed_graph=False)
```

Create directed or undirected graph in the json format.

### Parameters

- **mx** – *MethodAnalysis*
- **directed\_graph** – True if a directed graph should be created (default: False)

### Returns

```
androguard.core.bytecode.method2json_direct (mx)
```

**Parameters** **mx** – *MethodAnalysis*

### Returns

```
androguard.core.bytecode.method2json_undirect (mx)
```

**Parameters** **mx** – *MethodAnalysis*

### Returns

```
androguard.core.bytecode.method2png (output, mx, raw=False)
```

Export method to a png file format

### Parameters

- **output** (*string*) – output filename
- **mx** (MethodAnalysis object) – specify the MethodAnalysis object
- **raw** (*string*) – use directly a dot raw buffer

```
androguard.core.bytecode.object_to_bytes (obj)
```

Convert a object to a bytearray or call get\_raw() of the object if no useful type was found.

```
androguard.core.bytecode.vm2json (vm)
```

Get a JSON representation of a DEX file

**Parameters** **vm** – *DalvikVMFormat*

### Returns

## Module contents

### androguard.decompiler package

#### Subpackages

##### androguard.decompiler.dad package

#### Submodules

##### androguard.decompiler.dad.ast module

This file is a simplified version of writer.py that outputs an AST instead of source code.

```
class androguard.decompiler.dad.ast.JSONWriter(graph, method)
    Bases: object
```

```
    add(val)
    get_ast()
    get_cond(node)
    visit_cond_node(cond)
    visit_ins(op)
    visit_loop_node(loop)
    visit_node(node)
    visit_return_node(ret)
    visit_statement_node(stmt)
    visit_switch_node(switch)
    visit_throw_node(throw)
    visit_try_node(try_node)
```

```
androguard.decompiler.dad.ast.array_access(arr, ind)
```

```
androguard.decompiler.dad.ast.array_creation(tn, params, dim)
```

```
androguard.decompiler.dad.ast.array_initializer(params, tn=None)
```

```
androguard.decompiler.dad.ast.assignment(lhs, rhs, op=")
```

```
androguard.decompiler.dad.ast.binary_infix(op, left, right)
```

```
androguard.decompiler.dad.ast.cast(tn, arg)
```

```
androguard.decompiler.dad.ast.dummy(*args)
```

```
androguard.decompiler.dad.ast.expression_stmt(expr)
```

```
androguard.decompiler.dad.ast.field_access(triple, left)
```

```
androguard.decompiler.dad.ast.if_stmt(cond_expr, scopes)
```

```
androguard.decompiler.dad.ast.jump_stmt(keyword)
```

```
androguard.decompiler.dad.ast.literal(result, tt)
```

```
androguard.decompiler.dad.ast.literal_bool(b)
androguard.decompiler.dad.ast.literal_class(desc)
androguard.decompiler.dad.ast.literal_double(f)
androguard.decompiler.dad.ast.literal_float(f)
androguard.decompiler.dad.ast.literal_hex_int(b)
androguard.decompiler.dad.ast.literal_int(b)
androguard.decompiler.dad.ast.literal_long(b)
androguard.decompiler.dad.ast.literal_null()
androguard.decompiler.dad.ast.literal_string(s)
androguard.decompiler.dad.ast.local(name)
androguard.decompiler.dad.ast.local_decl_stmt(expr, decl)
androguard.decompiler.dad.ast.loop_stmt(isdo, cond_expr, body)
androguard.decompiler.dad.ast.method_invocation(triple, name, base, params)
androguard.decompiler.dad.ast.parenthesis(expr)
androguard.decompiler.dad.ast.parse_descriptor(desc)
androguard.decompiler.dad.ast.return_stmt(expr)
androguard.decompiler.dad.ast.statement_block()
androguard.decompiler.dad.ast.switch_stmt(cond_expr, ksv_pairs)
androguard.decompiler.dad.ast.throw_stmt(expr)
androguard.decompiler.dad.ast.try_stmt(tryb, pairs)
androguard.decompiler.dad.ast.typen(baset, dim)
androguard.decompiler.dad.ast.unary_postfix(left, op)
androguard.decompiler.dad.ast.unary_prefix(op, left)
androguard.decompiler.dad.ast.var_decl(typen, var)
androguard.decompiler.dad.ast.visit_arr_data(value)
androguard.decompiler.dad.ast.visit_decl(var, init_expr=None)
androguard.decompiler.dad.ast.visit_expr(op)
androguard.decompiler.dad.ast.visit_ins(op, isCtor=False)
androguard.decompiler.dad.ast.write_inplace_if_possible(lhs, rhs)
```

## androguard.decompiler.dad.basic\_blocks module

```
class androguard.decompiler.dad.basic_blocks.BasicBlock(name, block_ins)
    Bases: androguard.decompiler.dad.node.Node

    add_ins(new_ins_list)
    add_variable_declaration(variable)
    get_ins()
```

```
get_loc_with_ins()
number_ins(num)
remove_ins(loc, ins)
setCatchType(_type)

class androguard.decompiler.dad.basic_blocks.CatchBlock(node)
Bases: androguard.decompiler.dad.basic_blocks.BasicBlock

visit(visitor)
visit_exception(visitor)

class androguard.decompiler.dad.basic_blocks.CondBlock(name, block_ins)
Bases: androguard.decompiler.dad.basic_blocks.BasicBlock

neg()
update_attribute_with(n_map)
visit(visitor)
visit_cond(visitor)

class androguard.decompiler.dad.basic_blocks.Condition(cond1, cond2, isand, isnot)
Bases: object

get_ins()
get_loc_with_ins()
neg()
visit(visitor)

class androguard.decompiler.dad.basic_blocks.LoopBlock(name, cond)
Bases: androguard.decompiler.dad.basic_blocks.CondBlock

get_ins()
get_loc_with_ins()
neg()
update_attribute_with(n_map)
visit(visitor)
visit_cond(visitor)

class androguard.decompiler.dad.basic_blocks.ReturnBlock(name, block_ins)
Bases: androguard.decompiler.dad.basic_blocks.BasicBlock

visit(visitor)

class androguard.decompiler.dad.basic_blocks.ShortCircuitBlock(name, cond)
Bases: androguard.decompiler.dad.basic_blocks.CondBlock

get_ins()
get_loc_with_ins()
neg()
visit_cond(visitor)
```

```
class androguard.decompiler.dad.basic_blocks.StatementBlock(name, block_ins)
    Bases: androguard.decompiler.dad.basic_blocks.BasicBlock

    visit(visitor)

class androguard.decompiler.dad.basic_blocks.SwitchBlock(name, switch, block_ins)
    Bases: androguard.decompiler.dad.basic_blocks.BasicBlock

    add_case(case)
    copy_from(node)
    order_cases()
    update_attribute_with(n_map)
    visit(visitor)

class androguard.decompiler.dad.basic_blocks.ThrowBlock(name, block_ins)
    Bases: androguard.decompiler.dad.basic_blocks.BasicBlock

    visit(visitor)

class androguard.decompiler.dad.basic_blocks.TryBlock(node)
    Bases: androguard.decompiler.dad.basic_blocks.BasicBlock

    add_catch_node(node)
    num
    visit(visitor)

androguard.decompiler.dad.basic_blocks.build_node_from_block(block, vmap,
                                                               gen_ret, exception_type=None)
```

## androguard.decompiler.dad.control\_flow module

```
androguard.decompiler.dad.control_flow.catch_struct(graph, idoms)
```

```
androguard.decompiler.dad.control_flow.derived_sequence(graph)
```

Compute the derived sequence of the graph G The intervals of G are collapsed into nodes, intervals of these nodes are built, and the process is repeated iteratively until we obtain a single node (if the graph is not irreducible)

```
androguard.decompiler.dad.control_flow.identify_structures(graph, idoms)
```

```
androguard.decompiler.dad.control_flow.if_struct(graph, idoms)
```

```
androguard.decompiler.dad.control_flow.intervals(graph)
```

Compute the intervals of the graph Returns interval\_graph: a graph of the intervals of G interv\_heads: a dict of (header node, interval)

```
androguard.decompiler.dad.control_flow.loop_follow(start, end, nodes_in_loop)
```

```
androguard.decompiler.dad.control_flow.loop_struct(graphs_list, intervals_list)
```

```
androguard.decompiler.dad.control_flow.loop_type(start, end, nodes_in_loop)
```

```
androguard.decompiler.dad.control_flow.mark_loop(graph, start, end, interval)
```

```
androguard.decompiler.dad.control_flow.mark_loop_rec(graph, node, s_num, e_num, interval, nodes_in_loop)
```

```
androguard.decompiler.dad.control_flow.short_circuit_struct(graph, idom, node_map)
androguard.decompiler.dad.control_flow.switch_struct(graph, idoms)
androguard.decompiler.dad.control_flow.update_dom(idoms, node_map)
androguard.decompiler.dad.control_flow.while_block_struct(graph, node_map)
```

## androguard.decompiler.dad.dataflow module

```
class androguard.decompiler.dad.dataflow.BasicReachDef(graph, params)
Bases: object
```

```
    run()
```

```
class androguard.decompiler.dad.dataflow.DummyNode(name)
Bases: androguard.decompiler.dad.node.Node
```

```
    get_loc_with_ins()
```

```
androguard.decompiler.dad.dataflow.build_def_use(graph, lparams)
```

Builds the Def-Use and Use-Def (DU/UD) chains of the variables of the method.

```
androguard.decompiler.dad.dataflow.clear_path(graph, reg, loc1, loc2)
```

Check that the path from loc1 to loc2 is clear. We have to check that there is no side effect between the two location points. We also have to check that the variable *reg* is not redefined along one of the possible pathes from loc1 to loc2.

```
androguard.decompiler.dad.dataflow.clear_path_node(graph, reg, loc1, loc2)
```

```
androguard.decompiler.dad.dataflow.dead_code_elimination(graph, du, ud)
```

Run a dead code elimination pass. Instructions are checked to be dead. If it is the case, we remove them and we update the DU & UD chains of its variables to check for further dead instructions.

```
androguard.decompiler.dad.dataflow.group_variables(lvars, DU, UD)
```

```
androguard.decompiler.dad.dataflow.place_declarations(graph, dvars, du, ud)
```

```
androguard.decompiler.dad.dataflow.reach_def_analysis(graph, lparams)
```

```
androguard.decompiler.dad.dataflow.register_propagation(graph, du, ud)
```

Propagate the temporary registers between instructions and remove them if necessary. We process the nodes of the graph in reverse post order. For each instruction in the node, we look at the variables that it uses. For each of these variables we look where it is defined and if we can replace it with its definition. We have to be careful to the side effects some instructions may have. To do the propagation, we use the computed DU and UD chains.

```
androguard.decompiler.dad.dataflow.split_variables(graph, lvars, DU, UD)
```

```
androguard.decompiler.dad.dataflow.update_chain(graph, loc, du, ud)
```

Updates the DU chain of the instruction located at loc such that there is no more reference to it so that we can remove it. When an instruction is found to be dead (i.e it has no side effect, and the register defined is not used) we have to update the DU chain of all the variables that may me used by the dead instruction.

## androguard.decompiler.dad.decompile module

```
class androguard.decompiler.dad.decompile.DvClass(dvclass, vma)
Bases: object
```

```
    get_ast()
```

```
get_methods()
get_source()
get_source_ext()
process (doAST=False)
process_method (num, doAST=False)
show_source()

class androguard.decompiler.dad.decompile.DvMachine (name)
Bases: object

    get_class (class_name)
    get_classes ()
    process ()
    process_and_show ()
    show_source ()

class androguard.decompiler.dad.decompile.DvMethod (methanalysis)
Bases: object

    get_ast ()
    get_source ()
    get_source_ext ()
    process (doAST=False)
    show_source ()

androguard.decompiler.dad.decompile.auto_vm (filename)
androguard.decompiler.dad.decompile.get_field_ast (field)
androguard.decompiler.dad.decompile.main()
```

## androguard.decompiler.dad.graph module

```
class androguard.decompiler.dad.graph.GenInvokeRetName
Bases: object

    last ()
    new ()
    set_to (ret)

class androguard.decompiler.dad.graph.Graph
Bases: object

    add_catch_edge (e1, e2)
    add_edge (e1, e2)
    add_node (node)
    all_preds (node)
    all_sucs (node)
```

```
compute_rpo()
    Number the nodes in reverse post order. An RPO traversal visit as many predecessors of a node as possible before visiting the node itself.

draw(name, dname, draw_branches=True)
get_ins_from_loc(loc)
get_node_from_loc(loc)
immediate_dominators()
number_ins()
post_order()
    Return the nodes of the graph in post-order i.e we visit all the children of a node before visiting the node itself.

preds(node)
remove_ins(loc)
remove_node(node)
sucs(node)

androguard.decompiler.dad.graph.bfs(start)
androguard.decompiler.dad.graph.construct(start_block, vmap, exceptions)
androguard.decompiler.dad.graph.dom_lt(graph)
    Dominator algorithm from Lengaeur-Tarjan

androguard.decompiler.dad.graph.make_node(graph, block, block_to_node, vmap, gen_ret)
androguard.decompiler.dad.graph.simplify(graph)
    Simplify the CFG by merging/deleting statement nodes when possible: If statement B follows statement A and if B has no other predecessor besides A, then we can merge A and B into a new statement node. We also remove nodes which do nothing except redirecting the control flow (nodes which only contains a goto).

androguard.decompiler.dad.graph.split_if_nodes(graph)
    Split IfNodes in two nodes, the first node is the header node, the second one is only composed of the jump condition.
```

## androguard.decompiler.dad.instruction module

```
class androguard.decompiler.dad.instruction.ArrayExpression
    Bases: androguard.decompiler.dad.instruction.IRForm

class androguard.decompiler.dad.instruction.ArrayLengthExpression(array)
    Bases: androguard.decompiler.dad.instruction.ArrayExpression

get_type()
get_used_vars()
replace(old, new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.ArrayLoadExpression(arg, index, _type)
    Bases: androguard.decompiler.dad.instruction.ArrayExpression
```

```
get_type()
get_used_vars()
replace(old, new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.ArrayStoreInstruction(rhs, array, index, _type)
Bases: androguard.decompiler.dad.instruction.IRForm

get_used_vars()
has_side_effect()
replace(old, new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.AssignExpression(lhs, rhs)
Bases: androguard.decompiler.dad.instruction.IRForm

get_lhs()
get_rhs()
get_used_vars()
has_side_effect()
is_call()
is_propagable()
remove_defined_var()
replace(old, new)
replace_lhs(new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.BaseClass(name, descriptor=None)
Bases: androguard.decompiler.dad.instruction.IRForm

is_const()
visit(visitor)

class androguard.decompiler.dad.instruction.BinaryCompExpression(op, arg1, arg2, _type)
Bases: androguard.decompiler.dad.instruction.BinaryExpression

visit(visitor)

class androguard.decompiler.dad.instruction.BinaryExpression(op, arg1, arg2, _type)
Bases: androguard.decompiler.dad.instruction.IRForm

get_used_vars()
```

```
has_side_effect()
replace(old, new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.BinaryExpression2Addr(op, dest,
arg, _type)
Bases: androguard.decompiler.dad.instruction.BinaryExpression

class androguard.decompiler.dad.instruction.BinaryExpressionLit(op, arg1,
arg2)
Bases: androguard.decompiler.dad.instruction.BinaryExpression

class androguard.decompiler.dad.instruction.CastExpression(op, atype, arg)
Bases: androguard.decompiler.dad.instruction.UnaryExpression

get_type()
get_used_vars()
is_const()
visit(visitor)

class androguard.decompiler.dad.instruction.CheckCastExpression(arg, _type,
descrip-
tor=None)
Bases: androguard.decompiler.dad.instruction.IRForm

get_used_vars()
is_const()
replace(old, new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.ConditionalExpression(op, arg1,
arg2)
Bases: androguard.decompiler.dad.instruction.IRForm

get_lhs()
get_used_vars()
is_cond()
neg()
replace(old, new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.ConditionalZExpression(op, arg)
Bases: androguard.decompiler.dad.instruction.IRForm

get_lhs()
get_used_vars()
is_cond()
```

```
neg()
replace(old, new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.Constant(value, atype, int_value=None,
                                                       descriptor=None)
Bases: androguard.decompiler.dad.instruction.IRForm
get_int_value()
get_type()
get_used_vars()
is_const()
visit(visitor)

class androguard.decompiler.dad.instruction.FillArrayExpression(reg, value)
Bases: androguard.decompiler.dad.instruction.ArrayExpression
get_rhs()
get_used_vars()
is_propagable()
replace(old, new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.FilledArrayExpression(asize, atype,
                                                               args)
Bases: androguard.decompiler.dad.instruction.ArrayExpression
get_used_vars()
replace(old, new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.IRForm
Bases: object
get_lhs()
get_rhs()
get_type()
get_used_vars()
has_side_effect()
is_call()
is_cond()
is_const()
is_ident()
```

```
is_propagable()
remove_defined_var()
replace(old, new)
replace_lhs(new)
replace_var(old, new)
set_type(_type)
visit(visitor)

class androguard.decompiler.dad.instruction.InstanceExpression(arg, klass, ftype,
                                                               name)
Bases: androguard.decompiler.dad.instruction.IRForm
get_type()
get_used_vars()
replace(old, new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.InstanceInstruction(rhs, lhs, klass,
                                                               atype, name)
Bases: androguard.decompiler.dad.instruction.IRForm
get_lhs()
get_used_vars()
has_side_effect()
replace(old, new)
replace_var(old, new)
visit(visitor)

class androguard.decompiler.dad.instruction.InvokeDirectInstruction(cliname,
                                                               name,
                                                               base,
                                                               rtype,
                                                               ptype,
                                                               args,
                                                               triple)
Bases: androguard.decompiler.dad.instruction.InvokeInstruction

class androguard.decompiler.dad.instruction.InvokeInstruction(cliname, name,
                                                               base, rtype, ptype,
                                                               args, triple)
Bases: androguard.decompiler.dad.instruction.IRForm
get_type()
get_used_vars()
has_side_effect()
is_call()
replace(old, new)
```

```
replace_var (old, new)
visit (visitor)

class androguard.decompiler.dad.instruction.InvokeRangeInstruction (clsname,
                                                                    name,
                                                                    rtype,
                                                                    ptype,
                                                                    args,
                                                                    triple)
Bases: androguard.decompiler.dad.instruction.InvokeInstruction

class androguard.decompiler.dad.instruction.InvokeStaticInstruction (clsname,
                                                                    name,
                                                                    base,
                                                                    rtype,
                                                                    ptype,
                                                                    args,
                                                                    triple)
Bases: androguard.decompiler.dad.instruction.InvokeInstruction

get_used_vars ()

class androguard.decompiler.dad.instruction.MonitorEnterExpression (ref)
Bases: androguard.decompiler.dad.instruction.RefExpression

visit (visitor)

class androguard.decompiler.dad.instruction.MonitorExitExpression (ref)
Bases: androguard.decompiler.dad.instruction.RefExpression

visit (visitor)

class androguard.decompiler.dad.instruction.MoveExceptionExpression (ref,
                                                                     _type)
Bases: androguard.decompiler.dad.instruction.RefExpression

get_lhs ()
get_used_vars ()
has_side_effect ()
replace_lhs (new)
visit (visitor)

class androguard.decompiler.dad.instruction.MoveExpression (lhs, rhs)
Bases: androguard.decompiler.dad.instruction.IRForm

get_lhs ()
get_rhs ()
get_used_vars ()
has_side_effect ()
is_call ()
replace (old, new)
replace_lhs (new)
replace_var (old, new)
```

```
    visit(visitor)

class androguard.decompiler.dad.instruction.MoveResultExpression (lhs, rhs)
    Bases: androguard.decompiler.dad.instruction.MoveExpression

        has_side_effect()
        is_propagable()
        visit(visitor)

class androguard.decompiler.dad.instruction.NewArrayExpression (asize, atype)
    Bases: androguard.decompiler.dad.instruction.ArrayExpression

        get_used_vars()
        is_propagable()
        replace(old, new)
        replace_var(old, new)
        visit(visitor)

class androguard.decompiler.dad.instruction.NewInstance (ins_type)
    Bases: androguard.decompiler.dad.instruction.IRForm

        get_type()
        get_used_vars()
        replace(old, new)
        visit(visitor)

class androguard.decompiler.dad.instruction.NopExpression
    Bases: androguard.decompiler.dad.instruction.IRForm

        get_lhs()
        get_used_vars()
        visit(visitor)

class androguard.decompiler.dad.instruction.Param (value, atype)
    Bases: androguard.decompiler.dad.instruction.Variable

        is_const()
        visit(visitor)

class androguard.decompiler.dad.instruction.RefExpression (ref)
    Bases: androguard.decompiler.dad.instruction.IRForm

        get_used_vars()
        is_propagable()
        replace(old, new)
        replace_var(old, new)

class androguard.decompiler.dad.instruction.ReturnInstruction (arg)
    Bases: androguard.decompiler.dad.instruction.IRForm

        get_lhs()
        get_used_vars()
```

```
replace (old, new)
replace_var (old, new)
visit (visitor)

class androguard.decompiler.dad.instruction.StaticExpression (cls_name,
                                                               field_type,
                                                               field_name)
Bases: androguard.decompiler.dad.instruction.IRForm

get_type ()
replace (old, new)
visit (visitor)

class androguard.decompiler.dad.instruction.StaticInstruction (rhs, klass, ftype,
                                                               name)
Bases: androguard.decompiler.dad.instruction.IRForm

get_lhs ()
get_used_vars ()
has_side_effect ()
replace (old, new)
replace_var (old, new)
visit (visitor)

class androguard.decompiler.dad.instruction.SwitchExpression (src, branch)
Bases: androguard.decompiler.dad.instruction.IRForm

get_used_vars ()
replace (old, new)
replace_var (old, new)
visit (visitor)

class androguard.decompiler.dad.instruction.ThisParam (value, atype)
Bases: androguard.decompiler.dad.instruction.Param

visit (visitor)

class androguard.decompiler.dad.instruction.ThrowExpression (ref)
Bases: androguard.decompiler.dad.instruction.RefExpression

visit (visitor)

class androguard.decompiler.dad.instruction.UnaryExpression (op, arg, _type)
Bases: androguard.decompiler.dad.instruction.IRForm

get_type ()
get_used_vars ()
replace (old, new)
replace_var (old, new)
visit (visitor)

class androguard.decompiler.dad.instruction.Variable (value)
Bases: androguard.decompiler.dad.instruction.IRForm
```

```
get_used_vars()
is_ident()
value()
visit(visitor)
visit_decl(visitor)
```

## androguard.decompiler.dad.node module

```
class androguard.decompiler.dad.node.Interval(head)
Bases: object

    add_node(node)
    compute_end(graph)
    get_end()
    get_head()

class androguard.decompiler.dad.node.LoopType
Bases: object

    copy()
    is_endless
    is_posttest
    is_pretest

class androguard.decompiler.dad.node.MakeProperties(name, bases, dct)
Bases: type

class androguard.decompiler.dad.node.Node(name)
Bases: object

    copy_from(node)
    get_end()
    get_head()
    update_attribute_with(n_map)

class androguard.decompiler.dad.node.NodeType
Bases: object

    copy()
    is_cond
    is_return
    is_stmt
    is_switch
    is_throw
```

**androguard.decompiler.dad.opcode\_ins module**

```
class androguard.decompiler.dad.opcode_ins.Op
    Bases: object

    ADD = '+'
    AND = '&'
    CMP = 'cmp'
    DIV = '/'
    EQUAL = '==='
    GEQUAL = '>='
    GREATER = '>'
    INTSHL = '<<'
    INTSHR = '>>'
    LEQUAL = '<='
    LONGSHL = '<<'
    LONGSHR = '>>'
    LOWER = '<'
    MOD = '%'
    MUL = '*'
    NEG = '-'
    NEQUAL = '!='
    NOT = '~'
    OR = '|'
    SUB = '-'
    XOR = '^'

androguard.decompiler.dad.opcode_ins.adddouble(ins, vmap)
androguard.decompiler.dad.opcode_ins.adddouble2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.addfloat(ins, vmap)
androguard.decompiler.dad.opcode_ins.addfloat2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.addint(ins, vmap)
androguard.decompiler.dad.opcode_ins.addint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.addintlit16(ins, vmap)
androguard.decompiler.dad.opcode_ins.addintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.addlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.addlong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.aget(ins, vmap)
androguard.decompiler.dad.opcode_ins.agetboolean(ins, vmap)
```

```
androguard.decompiler.dad.opcode_ins.agetbyte (ins, vmap)
androguard.decompiler.dad.opcode_ins.agetchar (ins, vmap)
androguard.decompiler.dad.opcode_ins.agetobject (ins, vmap)
androguard.decompiler.dad.opcode_ins.agetshort (ins, vmap)
androguard.decompiler.dad.opcode_ins.agetwide (ins, vmap)
androguard.decompiler.dad.opcode_ins.andint (ins, vmap)
androguard.decompiler.dad.opcode_ins.andint2addr (ins, vmap)
androguard.decompiler.dad.opcode_ins.andintlit16 (ins, vmap)
androguard.decompiler.dad.opcode_ins.andintlit8 (ins, vmap)
androguard.decompiler.dad.opcode_ins.andlong (ins, vmap)
androguard.decompiler.dad.opcode_ins.andlong2addr (ins, vmap)
androguard.decompiler.dad.opcode_ins.aput (ins, vmap)
androguard.decompiler.dad.opcode_ins.aputboolean (ins, vmap)
androguard.decompiler.dad.opcode_ins.aputbyte (ins, vmap)
androguard.decompiler.dad.opcode_ins.aputchar (ins, vmap)
androguard.decompiler.dad.opcode_ins.aputobject (ins, vmap)
androguard.decompiler.dad.opcode_ins.aputshort (ins, vmap)
androguard.decompiler.dad.opcode_ins.aputwide (ins, vmap)
androguard.decompiler.dad.opcode_ins.arraylength (ins, vmap)
androguard.decompiler.dad.opcode_ins.assign_binary_2addr_exp (ins, val_op, op_type, vmap)
androguard.decompiler.dad.opcode_ins.assign_binary_exp (ins, val_op, op_type, vmap)
androguard.decompiler.dad.opcode_ins.assign_cast_exp (val_a, val_b, val_op, op_type, vmap)
androguard.decompiler.dad.opcode_ins.assign_cmp (val_a, val_b, val_c, cmp_type, vmap)
androguard.decompiler.dad.opcode_ins.assign_const (dest_reg, cst, vmap)
androguard.decompiler.dad.opcode_ins.assign_lit (op_type, val_cst, val_a, val_b, vmap)
androguard.decompiler.dad.opcode_ins.checkcast (ins, vmap)
androguard.decompiler.dad.opcode_ins.cmpgdouble (ins, vmap)
androguard.decompiler.dad.opcode_ins.cmpgfloat (ins, vmap)
androguard.decompiler.dad.opcode_ins.cmpldouble (ins, vmap)
androguard.decompiler.dad.opcode_ins.cmplfloat (ins, vmap)
androguard.decompiler.dad.opcode_ins.cmplong (ins, vmap)
androguard.decompiler.dad.opcode_ins.const (ins, vmap)
androguard.decompiler.dad.opcode_ins.const16 (ins, vmap)
androguard.decompiler.dad.opcode_ins.const4 (ins, vmap)
androguard.decompiler.dad.opcode_ins.constclass (ins, vmap)
```

```
androguard.decompiler.dad.opcode_ins.consthigh16(ins, vmap)
androguard.decompiler.dad.opcode_ins.conststring(ins, vmap)
androguard.decompiler.dad.opcode_ins.conststringjumbo(ins, vmap)
androguard.decompiler.dad.opcode_ins.constwide(ins, vmap)
androguard.decompiler.dad.opcode_ins.constwide16(ins, vmap)
androguard.decompiler.dad.opcode_ins.constwide32(ins, vmap)
androguard.decompiler.dad.opcode_ins.constwidehigh16(ins, vmap)
androguard.decompiler.dad.opcode_ins.divdouble(ins, vmap)
androguard.decompiler.dad.opcode_ins.divdouble2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.divfloat(ins, vmap)
androguard.decompiler.dad.opcode_ins.divfloat2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.divint(ins, vmap)
androguard.decompiler.dad.opcode_ins.divint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.divintlit16(ins, vmap)
androguard.decompiler.dad.opcode_ins.divintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.divlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.divlong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.doubletofloat(ins, vmap)
androguard.decompiler.dad.opcode_ins.doubletoint(ins, vmap)
androguard.decompiler.dad.opcode_ins.doubletolong(ins, vmap)
androguard.decompiler.dad.opcode_ins.fillarraydata(ins, vmap, value)
androguard.decompiler.dad.opcode_ins.fillarraydatapayload(ins, vmap)
androguard.decompiler.dad.opcode_ins.fillednewarray(ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.fillednewarrayrange(ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.floattodouble(ins, vmap)
androguard.decompiler.dad.opcode_ins.floattoint(ins, vmap)
androguard.decompiler.dad.opcode_ins.floattolong(ins, vmap)
androguard.decompiler.dad.opcode_ins.get_args(vmap, param_type, largs)
androguard.decompiler.dad.opcode_ins.get_variables(vmap, *variables)
androguard.decompiler.dad.opcode_ins.goto(ins, vmap)
androguard.decompiler.dad.opcode_ins.goto16(ins, vmap)
androguard.decompiler.dad.opcode_ins.goto32(ins, vmap)
androguard.decompiler.dad.opcode_ins.ifeq(ins, vmap)
androguard.decompiler.dad.opcode_ins.ifeqz(ins, vmap)
androguard.decompiler.dad.opcode_ins.ifge(ins, vmap)
androguard.decompiler.dad.opcode_ins.ifgez(ins, vmap)
```

```
androguard.decompiler.dad.opcode_ins.ifgt (ins, vmap)
androguard.decompiler.dad.opcode_ins.ifgtz (ins, vmap)
androguard.decompiler.dad.opcode_ins.ifle (ins, vmap)
androguard.decompiler.dad.opcode_ins.iflez (ins, vmap)
androguard.decompiler.dad.opcode_ins.iflt (ins, vmap)
androguard.decompiler.dad.opcode_ins.ifltz (ins, vmap)
androguard.decompiler.dad.opcode_ins.ifne (ins, vmap)
androguard.decompiler.dad.opcode_ins.ifnez (ins, vmap)
androguard.decompiler.dad.opcode_ins.iget (ins, vmap)
androguard.decompiler.dad.opcode_ins.igetboolean (ins, vmap)
androguard.decompiler.dad.opcode_ins.igetbyte (ins, vmap)
androguard.decompiler.dad.opcode_ins.igetchar (ins, vmap)
androguard.decompiler.dad.opcode_ins.igetobject (ins, vmap)
androguard.decompiler.dad.opcode_ins.igetshort (ins, vmap)
androguard.decompiler.dad.opcode_ins.igetwide (ins, vmap)
androguard.decompiler.dad.opcode_ins.instanceof (ins, vmap)
androguard.decompiler.dad.opcode_ins.inttobyte (ins, vmap)
androguard.decompiler.dad.opcode_ins.inttochar (ins, vmap)
androguard.decompiler.dad.opcode_ins.inttodouble (ins, vmap)
androguard.decompiler.dad.opcode_ins.inttofloat (ins, vmap)
androguard.decompiler.dad.opcode_ins.inttolong (ins, vmap)
androguard.decompiler.dad.opcode_ins.inttoshort (ins, vmap)
androguard.decompiler.dad.opcode_ins.invokedirect (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokedirectrange (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokeinterface (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokeinterfacerange (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokestatic (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokestaticrange (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokesuper (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokesuperrange (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokevirtual (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.invokevirtualrange (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.iput (ins, vmap)
androguard.decompiler.dad.opcode_ins.iputboolean (ins, vmap)
androguard.decompiler.dad.opcode_ins.iputbyte (ins, vmap)
androguard.decompiler.dad.opcode_ins.iputchar (ins, vmap)
```

```
androguard.decompiler.dad.opcode_ins.iputobject (ins, vmap)
androguard.decompiler.dad.opcode_ins.iputshort (ins, vmap)
androguard.decompiler.dad.opcode_ins.iputwide (ins, vmap)
androguard.decompiler.dad.opcode_ins.load_array_exp (val_a, val_b, val_c, ar_type,
vmap)
androguard.decompiler.dad.opcode_ins.longtодouble (ins, vmap)
androguard.decompiler.dad.opcode_ins.longtofloat (ins, vmap)
androguard.decompiler.dad.opcode_ins.longtoint (ins, vmap)
androguard.decompiler.dad.opcode_ins.monitorenter (ins, vmap)
androguard.decompiler.dad.opcode_ins.monitorexit (ins, vmap)
androguard.decompiler.dad.opcode_ins.move (ins, vmap)
androguard.decompiler.dad.opcode_ins.move16 (ins, vmap)
androguard.decompiler.dad.opcode_ins.moveexception (ins, vmap, _type)
androguard.decompiler.dad.opcode_ins.movefrom16 (ins, vmap)
androguard.decompiler.dad.opcode_ins.moveobject (ins, vmap)
androguard.decompiler.dad.opcode_ins.moveobject16 (ins, vmap)
androguard.decompiler.dad.opcode_ins.moveobjectfrom16 (ins, vmap)
androguard.decompiler.dad.opcode_ins.moveresult (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.moveresultobject (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.moveresultwide (ins, vmap, ret)
androguard.decompiler.dad.opcode_ins.movewide (ins, vmap)
androguard.decompiler.dad.opcode_ins.movewide16 (ins, vmap)
androguard.decompiler.dad.opcode_ins.movewidefrom16 (ins, vmap)
androguard.decompiler.dad.opcode_ins.muldouble (ins, vmap)
androguard.decompiler.dad.opcode_ins.muldouble2addr (ins, vmap)
androguard.decompiler.dad.opcode_ins.mulfloat (ins, vmap)
androguard.decompiler.dad.opcode_ins.mulfloat2addr (ins, vmap)
androguard.decompiler.dad.opcode_ins.mulint (ins, vmap)
androguard.decompiler.dad.opcode_ins.mulint2addr (ins, vmap)
androguard.decompiler.dad.opcode_ins.mulintlit16 (ins, vmap)
androguard.decompiler.dad.opcode_ins.mulintlit8 (ins, vmap)
androguard.decompiler.dad.opcode_ins.mullong (ins, vmap)
androguard.decompiler.dad.opcode_ins.mullong2addr (ins, vmap)
androguard.decompiler.dad.opcode_ins.negdouble (ins, vmap)
androguard.decompiler.dad.opcode_ins.negfloat (ins, vmap)
androguard.decompiler.dad.opcode_ins.negint (ins, vmap)
androguard.decompiler.dad.opcode_ins.neglong (ins, vmap)
```

```
androguard.decompiler.dad.opcode_ins.newarray(ins, vmap)
androguard.decompiler.dad.opcode_ins.newinstance(ins, vmap)
androguard.decompiler.dad.opcode_ins.nop(ins, vmap)
androguard.decompiler.dad.opcode_ins.notint(ins, vmap)
androguard.decompiler.dad.opcode_ins.notlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.orint(ins, vmap)
androguard.decompiler.dad.opcode_ins.orint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.orintlit16(ins, vmap)
androguard.decompiler.dad.opcode_ins.orintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.orlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.orlong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.packedswitch(ins, vmap)
androguard.decompiler.dad.opcode_ins.remdouble(ins, vmap)
androguard.decompiler.dad.opcode_ins.remdouble2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.remfloat(ins, vmap)
androguard.decompiler.dad.opcode_ins.remfloat2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.remint(ins, vmap)
androguard.decompiler.dad.opcode_ins.remint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.remintlit16(ins, vmap)
androguard.decompiler.dad.opcode_ins.remintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.remlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.remlong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.return_reg(ins, vmap)
androguard.decompiler.dad.opcode_ins.returnobject(ins, vmap)
androguard.decompiler.dad.opcode_ins.returnvoid(ins, vmap)
androguard.decompiler.dad.opcode_ins.returnwide(ins, vmap)
androguard.decompiler.dad.opcode_ins.rsubint(ins, vmap)
androguard.decompiler.dad.opcode_ins.rsubintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.sget(ins, vmap)
androguard.decompiler.dad.opcode_ins.sgetboolean(ins, vmap)
androguard.decompiler.dad.opcode_ins.sgetbyte(ins, vmap)
androguard.decompiler.dad.opcode_ins.sgetchar(ins, vmap)
androguard.decompiler.dad.opcode_ins.sgetobject(ins, vmap)
androguard.decompiler.dad.opcode_ins.sgetshort(ins, vmap)
androguard.decompiler.dad.opcode_ins.sgetwide(ins, vmap)
androguard.decompiler.dad.opcode_ins.shlint(ins, vmap)
```

```
androguard.decompiler.dad.opcode_ins.shlint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.shlintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.shllong(ins, vmap)
androguard.decompiler.dad.opcode_ins.shllong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.shrint(ins, vmap)
androguard.decompiler.dad.opcode_ins.shrint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.shrintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.shrlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.shrlong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.sparseswitch(ins, vmap)
androguard.decompiler.dad.opcode_ins.sput(ins, vmap)
androguard.decompiler.dad.opcode_ins.sputboolean(ins, vmap)
androguard.decompiler.dad.opcode_ins.sputbyte(ins, vmap)
androguard.decompiler.dad.opcode_ins.sputchar(ins, vmap)
androguard.decompiler.dad.opcode_ins.sputobject(ins, vmap)
androguard.decompiler.dad.opcode_ins.sputshort(ins, vmap)
androguard.decompiler.dad.opcode_ins.sputwide(ins, vmap)
androguard.decompiler.dad.opcode_ins.store_array_inst(val_a, val_b, val_c, ar_type,
                                                       vmap)
androguard.decompiler.dad.opcode_ins.subdouble(ins, vmap)
androguard.decompiler.dad.opcode_ins.subdouble2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.subfloat(ins, vmap)
androguard.decompiler.dad.opcode_ins.subfloat2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.subint(ins, vmap)
androguard.decompiler.dad.opcode_ins.subint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.sublong(ins, vmap)
androguard.decompiler.dad.opcode_ins.sublong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.throw(ins, vmap)
androguard.decompiler.dad.opcode_ins.ushrint(ins, vmap)
androguard.decompiler.dad.opcode_ins.ushrint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.ushrintlit8(ins, vmap)
androguard.decompiler.dad.opcode_ins.ushrlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.ushrlong2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.xorint(ins, vmap)
androguard.decompiler.dad.opcode_ins.xorint2addr(ins, vmap)
androguard.decompiler.dad.opcode_ins.xorintlit16(ins, vmap)
androguard.decompiler.dad.opcode_ins.xorintlit8(ins, vmap)
```

```
androguard.decompiler.dad.opcode_ins.xorlong(ins, vmap)
androguard.decompiler.dad.opcode_ins.xorlong2addr(ins, vmap)
```

### androguard.decompiler.dad.util module

```
androguard.decompiler.dad.util.build_path(graph, node1, node2, path=None)
```

Build the path from node1 to node2. The path is composed of all the nodes between node1 and node2, node1 excluded. Although if there is a loop starting from node1, it will be included in the path.

```
androguard.decompiler.dad.util.common_dom(idom, cur, pred)
```

```
androguard.decompiler.dad.util.create_png(cls_name, meth_name, graph,
                                             dir_name='graphs2')
```

```
androguard.decompiler.dad.util.get_access_class(access)
```

```
androguard.decompiler.dad.util.get_access_field(access)
```

```
androguard.decompiler.dad.util.get_access_method(access)
```

```
androguard.decompiler.dad.util.get_params_type(descriptor)
```

Return the parameters type of a descriptor (e.g (IC)V)

```
androguard.decompiler.dad.util.get_type(atype, size=None)
```

Retrieve the java type of a descriptor (e.g : I)

```
androguard.decompiler.dad.util.get_type_size(param)
```

Return the number of register needed by the type @param

```
androguard.decompiler.dad.util.merge_inner(clsdic)
```

Merge the inner class(es) of a class: e.g class A { ... } class A\$foo{ ... } class A\$bar{ ... } ==> class A { class foo{...} class bar{...} ... }

### androguard.decompiler.dad.writer module

```
class androguard.decompiler.dad.writer.Writer(graph, method)
```

Bases: object

```
dec_ind(i=1)
```

```
end_ins()
```

```
inc_ind(i=1)
```

```
space()
```

```
str_ext()
```

```
visit_alength(array)
```

```
visit_aload(array, index)
```

```
visit_assign(lhs, rhs)
```

```
visit astore(array, index, rhs, data=None)
```

```
visit_base_class(cls, data=None)
```

```
visit_binary_expression(op, arg1, arg2)
```

```
visit_cast(op, arg)
```

```
visitCatch_node(catch_node)
```

```
visit_check_cast (arg, atype)
visit_cond_expression (op, arg1, arg2)
visit_cond_node (cond)
visit_condz_expression (op, arg)
visit_constant (cst)
visit_decl (var)
visit_fill_array (array, value)
visit_filled_new_array (atype, size, args)
visit_get_instance (arg, name, data=None)
visit_get_static (cls, name)
visit_ins (ins)
visit_invoke (name, base, ptype, rtype, args, invokeInstr)
visit_loop_node (loop)
visit_monitor_enter (ref)
visit_monitor_exit (ref)
visit_move (lhs, rhs)
visit_move_exception (var, data=None)
visit_move_result (lhs, rhs)
visit_new (atype, data=None)
visit_new_array (atype, size)
visit_node (node)
visit_nop ()
visit_param (param, data=None)
visit_put_instance (lhs, name, rhs, data=None)
visit_put_static (cls, name, rhs)
visit_return (arg)
visit_return_node (ret)
visit_return_void ()
visit_short_circuit_condition (nnot, aand, cond1, cond2)
visit_statement_node (stmt)
visit_super ()
visit_switch (arg)
visit_switch_node (switch)
visit_this ()
visit_throw (ref)
visit_throw_node (throw)
```

```
visit_try_node (try_node)
visit_unary_expression (op, arg)
visit_variable (var)
write (s, data=None)
write_ext (t)
write_ind ()
write_ind_visit_end (lhs, s, rhs=None, data=None)
write_ind_visit_end_ext (lhs, before, s, after, rhs=None, data=None, subsection='UNKNOWN_SUBSECTION')
write_inplace_if_possible (lhs, rhs)
write_method ()

androguard.decompiler.dad.writer.string (s)
Convert a string to a escaped ASCII representation including quotation marks :param s: a string :return: ASCII
escaped string
```

## Module contents

### Submodules

#### androguard.decompiler.decompiler module

```
class androguard.decompiler.decompiler.DecompilerDAD (vm, vmx)
Bases: object

display_all (_class)
display_source (m)
get_all (class_name)
get_ast_class (_class)
get_ast_method (m)
get_source_class (_class)
get_source_class_ext (_class)
get_source_method (m)

class androguard.decompiler.decompiler.DecompilerDed (vm, bin_ded='ded.sh',
tmp_dir='/tmp')
Bases: object

display_all (_class)
display_source (method)
get_all (class_name)
get_source_class (_class)
get_source_method (method)
```

```
class androguard.decompiler.decompiler.DecompilerDex2Fernflower(vm,
                                                                bin_dex2jar='dex2jar.sh',
                                                                bin_fernflower='fernflower.jar',
                                                                op-
                                                                tions_fernflower={'asc':
                                                                'I',      'dgs':
                                                                'I'},      tmp_dir='/tmp/')

Bases: object

display_all(_class)
display_source(method)
get_all(class_name)
get_source_class(_class)
get_source_method(method)

class androguard.decompiler.decompiler.DecompilerDex2Jad(vm,
                                                          bin_dex2jar='dex2jar.sh',
                                                          bin_jad='jad',
                                                          tmp_dir='/tmp/')

Bases: object

display_all(_class)
display_source(method)
get_all(class_name)
get_source_class(_class)
get_source_method(method)

class androguard.decompiler.decompiler.DecompilerDex2WineJad(vm,
                                                               bin_dex2jar='dex2jar.sh',
                                                               bin_jad='jad',
                                                               tmp_dir='/tmp/')

Bases: object

display_all(_class)
display_source(method)
get_all(class_name)
get_source_class(_class)
get_source_method(method)

class androguard.decompiler.decompiler.DecompilerJADX(vm, vmx, jadx='jad', keep-
                                                       files=False)

Bases: object

display_all(_class)
???
Parameters _class -
Returns

display_source(m)
This method does the same as get_source_method but prints the result directly to stdout
```

**Parameters** `m` – *EncodedMethod* to print

**Returns**

```
get_all(class_name)
???
```

**Parameters** `class_name` –

**Returns**

```
get_source_class(_class)
```

Return the Java source code of a whole class

**Parameters** `_class` – *ClassDefItem* object, to get the source from

**Returns**

```
get_source_method(m)
```

Return the Java source of a single method

**Parameters** `m` – *EncodedMethod* Object

**Returns**

```
class androguard.decompiler.decompiler.Dex2Jar(vm,           bin_dex2jar='dex2jar.sh',
                                              tmp_dir='/tmp/')
```

Bases: object

```
get_jar()
```

```
exception androguard.decompiler.decompiler.JADXDecompilerError
```

Bases: Exception

Exception for JADeX related problems

```
class androguard.decompiler.decompiler.MethodFilter(**options)
```

Bases: pygments.filter.Filter

```
filter(lexer, stream)
```

## Module contents

### 2.1.2 Submodules

#### 2.1.3 androguard.misc module

```
androguard.misc.AnalyzeAPK(_file, session=None, raw=False)
```

Analyze an android application and setup all stuff for a more quickly analysis !

**Parameters**

- **session** – A session (default None)
- **\_file** (*string or bytes*) – the filename of the android application or a buffer which represents the application

**Return type** return the APK, DalvikVMFormat, and VMAnalysis objects

```
androguard.misc.AnalyzeDex(filename, session=None)
```

Analyze an android dex file and setup all stuff for a more quickly analysis !

**Parameters**

- **session** – A session (Default None)
- **filename** (*string*) – the filename of the android dex file or a buffer which represents the dex file

**Return type** return the DalvikVMFormat, and VMAnalysis objects

`androguard.misc.AnalyzeODex(filename, session=None)`

Analyze an android odex file and setup all stuff for a more quickly analysis !

#### Parameters

- **filename** (*string*) – the filename of the android dex file or a buffer which represents the dex file
- **session** – The Androguard Session to add the ODex to (default: None)

**Return type** return the DalvikOdexVMFormat, and VMAnalysis objects

`androguard.misc.RunDecompiler(d, dx, decompiler_name)`

Run the decompiler on a specific analysis

#### Parameters

- **d** (DalvikVMFormat object) – the DalvikVMFormat object
- **dx** (VMAnalysis object) – the analysis of the format
- **decompiler** (*string*) – the type of decompiler to use (“dad”, “dex2jad”, “ded”)

`androguard.misc.clean_file_name(filename, unique=True, replace='_', force_nt=False)`

Return a filename version, which has no characters in it which are forbidden. On Windows these are for example <, /, ?, ...

The intention of this function is to allow distribution of files to different OSes.

#### Parameters

- **filename** – string to clean
- **unique** – check if the filename is already taken and append an integer to be unique (default: True)
- **replace** – replacement character. (default: ‘\_’)
- **force\_nt** – Force shortening of paths like on NT systems (default: False)

**Returns** clean string

`androguard.misc.get_default_session()`

Return the default Session from the configuration or create a new one, if the session is None.

`androguard.misc.init_print_colors()`

`androguard.misc.sign_apk(filename, keystore, storepass)`

Use jarsigner to sign an APK file.

#### Parameters

- **filename** – APK file on disk to sign (path)
- **keystore** – path to keystore
- **storepass** – your keystore passphrase

## 2.1.4 androguard.session module

`androguard.session.Load(filename)`  
load your session!

**Parameters** `filename` (*string*) – the filename where the session has been saved

**Return type** the elements of your session :)

**Example** `s = session.Load("mysession.p")`

`androguard.session.Save(session, filename)`  
save your session!

**Parameters**

- `session` – A Session object to save
- `filename` (*string*) – output filename to save the session

**Example** `s = session.Session() session.Save(s, "msession.p")`

**class** `androguard.session.Session(export_ipython=False)`

Bases: `object`

`add(filename, raw_data, dx=None)`

`addAPK(filename, data)`

Add an APK file to the Session and run analysis on it.

**Parameters**

- `filename` – (file)name of APK file
- `data` – binary data of the APK file

**Returns** a tuple of SHA256 Checksum and APK Object

`addDEX(filename, data, dx=None)`

Add a DEX file to the Session and run analysis.

**Parameters**

- `filename` – the (file)name of the DEX file
- `data` – binary data of the dex file
- `dx` – an existing Analysis Object (optional)

**Returns** A tuple of SHA256 Hash, DalvikVMFormat Object and Analysis object

`addDEY(filename, data, dx=None)`

`get_all_apks()`

`get_analysis(current_class)`

`get_classes()`

`get_digest_by_class(current_class)`

`get_filename_by_class(current_class)`

`get_format(current_class)`

`get_nb_strings()`

`get_objects_apk(filename, digest=None)`

```
get_objects_dex()  
get_strings()  
isOpen()  
    Test if any file was analyzed in this session  
    Returns True if any file was analyzed, False otherwise  
reset()  
    Reset the current session, delete all added files.
```

## 2.1.5 androguard.util module

androguard.util.get\_certificate\_name\_string(*name*, *short=False*)  
Return the distinguished name of an X509 Certificate

### Parameters

- **name** (`cryptography.x509.Name`) – Name object to return the DN from
- **short** (`Boolean`) – Use short form (Default: False)

### Return type

`androguard.util.read(filename, binary=True)`

## 2.1.6 Module contents

# CHAPTER 3

---

## Indices and tables

---

- genindex
- modindex
- search



---

## Python Module Index

---

**a**

androguard.util, 126  
androguard, 126  
androguard.core, 97  
androguard.core.analysis, 25  
androguard.core.analysis.analysis, 13  
androguard.core.analysis.auto, 21  
androguard.core.androconf, 93  
androguard.core.api\_specific\_resources,  
    25  
androguard.core.bytecode, 94  
androguard.core.bytecodes, 92  
androguard.core.bytecodes.apk, 25  
androguard.core.bytecodes.axml, 87  
androguard.core.bytecodes.dvm, 31  
androguard.core.bytecodes.mutfl8, 91  
androguard.core.data, 93  
androguard.core.data.data, 92  
androguard.core.resources, 93  
androguard.core.resources.public, 93  
androguard.decompiler, 123  
androguard.decompiler.dad, 121  
androguard.decompiler.dad.ast, 97  
androguard.decompiler.dad.basic\_blocks,  
    98  
androguard.decompiler.dad.control\_flow,  
    100  
androguard.decompiler.dad.dataflow, 101  
androguard.decompiler.dad.decompile, 101  
androguard.decompiler.dad.graph, 102  
androguard.decompiler.dad.instruction,  
    103  
androguard.decompiler.dad.node, 111  
androguard.decompiler.dad.opcode\_ins,  
    112  
androguard.decompiler.dad.util, 119  
androguard.decompiler.dad.writer, 119  
androguard.decompiler.decompiler, 121  
androguard.misc, 123  
androguard.session, 125



---

## Index

---

### A

access\_flags (androguard.core.bytecodes.dvm.EncodedMethod attribute), 51  
ADD (androguard.decompiler.dad.opcode\_ins.Op attribute), 112  
add() (androguard.core.analysis.analysis.Analysis method), 13  
add() (androguard.core.analysis.analysis.Exceptions method), 19  
add() (androguard.core.bytecodes.dvm.DBGBytecode method), 39  
add() (androguard.decompiler.dad.ast.JSONWriter method), 97  
add() (androguard.session.Session method), 125  
add\_case() (androguard.decompiler.dad.basic\_blocks.SwitchBlock method), 100  
add\_catch\_edge() (androguard.decompiler.dad.graph.Graph method), 102  
add\_catch\_node() (androguard.decompiler.dad.basic\_blocks.TryBlock method), 100  
add\_edge() (androguard.core.data.data.DexViewer method), 92  
add\_edge() (androguard.decompiler.dad.graph.Graph method), 102  
add\_exception\_node() (androguard.core.data.data.DexViewer method), 92  
add\_inote() (androguard.core.bytecodes.dvm.DalvikCode method), 41  
add\_inote() (androguard.core.bytecodes.dvm.DCode method), 40  
add\_inote() (androguard.core.bytecodes.dvm.EncodedMethod method), 51  
add\_ins() (androguard.decompiler.dad.basic\_blocks.BasicBlock method), 98  
add\_method\_node() (androguard.core.data.data.DexViewer method), 92  
add\_node() (androguard.core.data.data.DexViewer method), 92  
add\_node() (androguard.decompiler.dad.graph.Graph method), 102  
add\_node() (androguard.decompiler.dad.node.Interval method), 111  
add\_note() (androguard.core.analysis.analysis.DVMBasicBlock method), 18  
add\_note() (androguard.core.bytecodes.dvm.EncodedMethod method), 51  
add\_note() (androguard.core.bytecodes.dvm.FillArrayData method), 57  
add\_note() (androguard.core.bytecodes.dvm.PackedSwitch method), 78  
add\_note() (androguard.core.bytecodes.dvm.SparseSwitch method), 81  
add\_type\_item() (androguard.core.bytecodes.dvm.ClassManager method), 38  
add\_variable\_declaration() (androguard.decompiler.dad.basic\_blocks.BasicBlock method), 98  
addAPK() (androguard.session.Session method), 125  
addDEX() (androguard.session.Session method), 125  
addDEY() (androguard.session.Session method), 125  
adddouble() (in module androguard.decompiler.dad.opcode\_ins), 112  
adddouble2addr() (in module androguard.decompiler.dad.opcode\_ins), 112  
addfloat() (in module androguard.decompiler.dad.opcode\_ins), 112  
addfloat2addr() (in module androguard.decompiler.dad.opcode\_ins), 112  
AddFXrefRead() (androguard.core.analysis.analysis.ClassAnalysis method), 17  
AddFXrefWrite() (androguard.core.analysis.analysis.ClassAnalysis method), 17

addint() (in module andro-  
guard.decompiler.dad.opcode\_ins), 112  
addint2addr() (in module andro-  
guard.decompiler.dad.opcode\_ins), 112  
addintlit16() (in module andro-  
guard.decompiler.dad.opcode\_ins), 112  
addintlit8() (in module andro-  
guard.decompiler.dad.opcode\_ins), 112  
addlong() (in module andro-  
guard.decompiler.dad.opcode\_ins), 112  
addlong2addr() (in module andro-  
guard.decompiler.dad.opcode\_ins), 112  
AddMXrefFrom() (andro-  
guard.core.analysis.analysis.ClassAnalysis  
method), 17  
AddMXrefTo() (andro-  
guard.core.analysis.analysis.ClassAnalysis  
method), 17  
AddXrefFrom() (andro-  
guard.core.analysis.analysis.ClassAnalysis  
method), 17  
AddXrefFrom() (andro-  
guard.core.analysis.analysis.MethodClassAnalysis  
method), 20  
AddXrefFrom() (andro-  
guard.core.analysis.analysis.StringAnalysis  
method), 21  
AddXrefRead() (andro-  
guard.core.analysis.analysis.FieldClassAnalysis  
method), 20  
AddXrefTo() (androguard.core.analysis.analysis.ClassAnalysis  
method), 17  
AddXrefTo() (androguard.core.analysis.analysis.MethodClassAnalysis  
method), 20  
AddXrefWrite() (andro-  
guard.core.analysis.analysis.FieldClassAnalysis  
method), 20  
adjust\_idx() (androguard.core.bytecodes.dvm.EncodedField  
method), 50  
adjust\_idx() (androguard.core.bytecodes.dvm.EncodedMethod  
method), 51  
aget() (in module andro-  
guard.decompiler.dad.opcode\_ins), 112  
agetboolean() (in module andro-  
guard.decompiler.dad.opcode\_ins), 112  
agetbyte() (in module andro-  
guard.decompiler.dad.opcode\_ins), 112  
agetchar() (in module andro-  
guard.decompiler.dad.opcode\_ins), 113  
agetobject() (in module andro-  
guard.decompiler.dad.opcode\_ins), 113  
agetshort() (in module andro-  
guard.decompiler.dad.opcode\_ins), 113  
agetwide() (in module andro-  
guard.decompiler.dad.opcode\_ins), 113  
andint() (in module andro-  
guard.decompiler.dad.opcode\_ins), 113  
andint2addr() (in module andro-  
guard.decompiler.dad.opcode\_ins), 113  
andintlit16() (in module andro-  
guard.decompiler.dad.opcode\_ins), 113  
andintlit8() (in module andro-  
guard.decompiler.dad.opcode\_ins), 113  
andlong() (in module andro-  
guard.decompiler.dad.opcode\_ins), 113  
andlong2addr() (in module andro-  
guard.decompiler.dad.opcode\_ins), 113  
androAuto (class in androguard.core.analysis.auto), 21  
androguard (module), 126  
androguard.core (module), 97  
androguard.core.analysis (module), 25  
androguard.core.analysis.analysis (module), 13  
androguard.core.analysis.auto (module), 21  
androguard.core.androconf (module), 93  
androguard.core.api\_specific\_resources (module), 25  
androguard.core.bytecode (module), 94  
androguard.core.bytecodes (module), 92  
androguard.core.bytecodes.apk (module), 25  
androguard.core.bytecodes.axml (module), 87  
androguard.core.bytecodes.dvm (module), 31  
androguard.core.bytecodes.mutf8 (module), 91  
androguard.core.data (module), 93

androguard.core.data.data (module), 92	andro-	
androguard.core.resources (module), 93	guard.decompiler.dad.ast), 97	
androguard.core.resources.public (module), 93	array_initializer() (in module andro-	
androguard.decompiler (module), 123	guard.decompiler.dad.ast), 97	
androguard.decompiler.dad (module), 121	ArrayExpression (class in andro-	
androguard.decompiler.dad.ast (module), 97	guard.decompiler.dad.instruction), 103	
androguard.decompiler.dad.basic_blocks (module), 98	arraylength() (in module andro-	
androguard.decompiler.dad.control_flow (module), 100	guard.decompiler.dad.opcode_ins), 113	
androguard.decompiler.dad.dataflow (module), 101	ArrayLengthExpression (class in andro-	
androguard.decompiler.dad.decompile (module), 101	guard.decompiler.dad.instruction), 103	
androguard.decompiler.dad.graph (module), 102	ArrayLoadExpression (class in andro-	
androguard.decompiler.dad.instruction (module), 103	guard.decompiler.dad.instruction), 103	
androguard.decompiler.dad.node (module), 111	ArrayStoreInstruction (class in andro-	
androguard.decompiler.dad.opcode_ins (module), 112	guard.decompiler.dad.instruction), 104	
androguard.decompiler.dad.util (module), 119	ARSCComplex (class in andro-	
androguard.decompiler.dad.writer (module), 119	guard.core.bytecodes.axml), 87	
androguard.decompiler.decompiler (module), 121	ARSCHeader (class in androguard.core.bytecodes.axml),	
androguard.misc (module), 123	87	
androguard.session (module), 125	ARSCPParser (class in androguard.core.bytecodes.axml),	
androguard.util (module), 126	87	
AnnotationElement (class in	andro-	
guard.core.bytecodes.dvm), 31	ARSCParser.ResourceResolver (class in andro-	
AnnotationItem (class in	guard.core.bytecodes.axml), 87	
guard.core.bytecodes.dvm), 32	ARSCResStringPoolRef (class in andro-	
AnnotationOffItem (class in	guard.core.bytecodes.axml), 88	
guard.core.bytecodes.dvm), 32	ARSCResTableConfig (class in andro-	
AnnotationsDirectoryItem (class in	guard.core.bytecodes.axml), 89	
guard.core.bytecodes.dvm), 34	ARSCResTableEntry (class in andro-	
AnnotationSetItem (class in	guard.core.bytecodes.axml), 89	
guard.core.bytecodes.dvm), 33	ARSCResTablePackage (class in andro-	
AnnotationSetRefItem (class in	guard.core.bytecodes.axml), 89	
guard.core.bytecodes.dvm), 33	ARSCResType (class in andro-	
AnnotationSetRefList (class in	guard.core.bytecodes.axml), 89	
guard.core.bytecodes.dvm), 33	ARSCResTypeSpec (class in andro-	
APILevelNotFoundError, 25	guard.core.bytecodes.axml), 89	
APK (class in androguard.core.bytecodes.apk), 25	assign_binary_2addr_exp() (in module andro-	
ApkViewer (class in androguard.core.data.data), 92	guard.decompiler.dad.opcode_ins), 113	
aput() (in module	assign_binary_exp() (in module andro-	
guard.decompiler.dad.opcode_ins), 113	guard.decompiler.dad.opcode_ins), 113	
aputboolean() (in module	assign_cast_exp() (in module andro-	
guard.decompiler.dad.opcode_ins), 113	guard.decompiler.dad.opcode_ins), 113	
aputbyte() (in module	assign_cmp() (in module andro-	
guard.decompiler.dad.opcode_ins), 113	guard.decompiler.dad.opcode_ins), 113	
aputchar() (in module	assign_const() (in module andro-	
guard.decompiler.dad.opcode_ins), 113	guard.decompiler.dad.opcode_ins), 113	
aputobject() (in module	assign_lit() (in module andro-	
guard.decompiler.dad.opcode_ins), 113	guard.decompiler.dad.opcode_ins), 113	
aputshort() (in module	AssignExpression (class in andro-	
guard.decompiler.dad.opcode_ins), 113	guard.decompiler.dad.instruction), 104	
aputwide() (in module	assignment() (in module androguard.decompiler.dad.ast),	
guard.decompiler.dad.opcode_ins), 113	97	
array_access() (in module	auto_vm() (in module andro-	
guard.decompiler.dad.ast), 97	guard.decompiler.dad.decompile), 102	
	AXMLParser (class in androguard.core.bytecodes.axml),	
	89	

AXMLPrinter (class in androguard.core.bytecodes.axml), 90

**B**

BaseClass (class in androguard.decompiler.dad.instruction), 104

BasicBlock (class in androguard.decompiler.dad.basic\_blocks), 98

BasicBlocks (class in androguard.core.analysis.analysis), 16

BasicReachDef (class in androguard.decompiler.dad.dataflow), 101

bfs() (in module androguard.decompiler.dad.graph), 103

binary\_infix() (in module androguard.decompiler.dad.ast), 97

BinaryCompExpression (class in androguard.decompiler.dad.instruction), 104

BinaryExpression (class in androguard.decompiler.dad.instruction), 104

BinaryExpression2Addr (class in androguard.decompiler.dad.instruction), 105

BinaryExpressionLit (class in androguard.decompiler.dad.instruction), 105

Black (androguard.core.androconf.Color attribute), 93

Blue (androguard.core.androconf.Color attribute), 93

Bold (androguard.core.androconf.Color attribute), 93

BrokenAPKError, 31

Buff (class in androguard.core.bytecode), 94

BuffHandle (class in androguard.core.bytecode), 94

build\_def\_use() (in module androguard.decompiler.dad.dataflow), 101

build\_node\_from\_block() (in module androguard.decompiler.dad.basic\_blocks), 100

build\_path() (in module androguard.decompiler.dad.util), 119

**C**

cast() (in module androguard.decompiler.dad.ast), 97

CastExpression (class in androguard.decompiler.dad.instruction), 105

catch\_struct() (in module androguard.decompiler.dad.control\_flow), 100

CatchBlock (class in androguard.decompiler.dad.basic\_blocks), 99

checkcast() (in module androguard.decompiler.dad.opcode\_ins), 113

CheckCastExpression (class in androguard.decompiler.dad.instruction), 105

chr() (in module androguard.core.bytecodes.mutf8), 91

ClassAnalysis (class in androguard.core.analysis.analysis), 16

ClassDataItem (class in androguard.core.bytecodes.dvm), 35

ClassDefItem (class in androguard.core.bytecodes.dvm), 36

ClassHDefItem (class in androguard.core.bytecodes.dvm), 38

ClassManager (class in androguard.core.bytecodes.dvm), 38

clean\_file\_name() (in module androguard.misc), 124

clean\_name\_instruction() (in module androguard.core.bytecodes.dvm), 86

clear\_notes() (androguard.core.analysis.analysis.DVMBasicBlock method), 18

clear\_path() (in module androguard.decompiler.dad.dataflow), 101

clear\_path\_node() (in module androguard.decompiler.dad.dataflow), 101

CMP (androguard.decompiler.dad.opcode\_ins.Op attribute), 112

cmpgdouble() (in module androguard.decompiler.dad.opcode\_ins), 113

cmpgfloat() (in module androguard.decompiler.dad.opcode\_ins), 113

cmpldouble() (in module androguard.decompiler.dad.opcode\_ins), 113

cmplfloat() (in module androguard.decompiler.dad.opcode\_ins), 113

cmplong() (in module androguard.decompiler.dad.opcode\_ins), 113

code\_off (androguard.core.bytecodes.dvm.EncodedMethod attribute), 51

CodeItem (class in androguard.core.bytecodes.dvm), 39

Color (class in androguard.core.androconf), 93

color\_range() (in module androguard.core.androconf), 93

colorize\_operands() (androguard.core.bytecodes.dvm.DalvikVMFormat method), 43

common\_dom() (in module androguard.decompiler.dad.util), 119

complexToFloat() (in module androguard.core.bytecodes.axml), 91

compute\_end() (androguard.decompiler.dad.node.Interval method), 111

compute\_rpo() (androguard.decompiler.dad.graph.Graph method), 102

CondBlock (class in androguard.decompiler.dad.basic\_blocks), 99

Condition (class in androguard.decompiler.dad.basic\_blocks), 99

ConditionalExpression (class in androguard.decompiler.dad.instruction), 105

ConditionalZExpression (class in androguard.decompiler.dad.instruction), 105

Configuration (class in androguard.core.androconf), 93

const() (in module androguard.decompiler.dad.opcode\_ins), 113

**D**  
 const16() (in module andro-guard.decompiler.dad.opcode\_ins), 113  
 const4() (in module andro-guard.decompiler.dad.opcode\_ins), 113  
 Constant (class in andro-guard.decompiler.dad.instruction), 106  
 constclass() (in module andro-guard.decompiler.dad.opcode\_ins), 113  
 consthigh16() (in module andro-guard.decompiler.dad.opcode\_ins), 113  
 construct() (in module andro-guard.decompiler.dad.graph), 103  
 ConstString (class in androguard.core.bytecodes.dvm), 39  
 conststring() (in module andro-guard.decompiler.dad.opcode\_ins), 114  
 conststringjumbo() (in module andro-guard.decompiler.dad.opcode\_ins), 114  
 constwide() (in module andro-guard.decompiler.dad.opcode\_ins), 114  
 constwide16() (in module andro-guard.decompiler.dad.opcode\_ins), 114  
 constwide32() (in module andro-guard.decompiler.dad.opcode\_ins), 114  
 constwidehigh16() (in module andro-guard.decompiler.dad.opcode\_ins), 114  
 copy() (androguard.decompiler.dad.node.LoopType method), 111  
 copy() (androguard.decompiler.dad.node.NodeType method), 111  
 copy\_from() (androguard.decompiler.dad.basic\_blocks.SwitchBlock method), 100  
 copy\_from() (androguard.decompiler.dad.node.Node method), 111  
 crash() (androguard.core.analysis.auto.DefaultAndroAnalysis method), 23  
 create\_adex() (androguard.core.analysis.auto.DefaultAndroAnalysis method), 23  
 create\_apk() (androguard.core.analysis.auto.DefaultAndroAnalysis method), 23  
 create\_arsc() (androguard.core.analysis.auto.DefaultAndroAnalysis method), 23  
 create\_axml() (androguard.core.analysis.auto.DefaultAndroAnalysis method), 23  
 create\_dex() (androguard.core.analysis.auto.DefaultAndroAnalysis method), 24  
 create\_dey() (androguard.core.analysis.auto.DefaultAndroAnalysis method), 24  
 create\_png() (in module androguard.decompiler.dad.util), 119  
 create\_python\_export() (andro-guard.core.bytecodes.dvm.DalvikVMFormat method), 43  
 create\_xref() (androguard.core.analysis.analysis.Analysis

method), 13  
 Cyan (androguard.core.androconf.Color attribute), 93  
 DalvikCode (class in androguard.core.bytecodes.dvm), 41  
 DalvikOdexVMFormat (class in andro-guard.core.bytecodes.dvm), 42  
 DalvikVMFormat (class in andro-guard.core.bytecodes.dvm), 43  
 DBGBytecode (class in androguard.core.bytecodes.dvm), 39  
 DCode (class in androguard.core.bytecodes.dvm), 40  
 dead\_code\_elimination() (in module andro-guard.decompiler.dad.dataflow), 101  
 DebugInfoItem (class in andro-guard.core.bytecodes.dvm), 47  
 DebugInfoItemEmpty (class in andro-guard.core.bytecodes.dvm), 47  
 dec\_ind() (androguard.decompiler.dad.writer.Writer method), 119  
 decode() (in module androguard.core.bytecodes.mutf8), 91  
 decode16() (androguard.core.bytecodes.axml.StringBlock method), 91  
 decode8() (androguard.core.bytecodes.axml.StringBlock method), 91  
 decode\_bytes() (andro-guard.core.bytecodes.axml.StringBlock method), 91  
 decodeLength() (andro-guard.core.bytecodes.axml.StringBlock method), 91  
 DecompilerDAD (class in andro-guard.decompiler.decompiler), 121  
 DecompilerDed (class in andro-guard.decompiler.decompiler), 121  
 DecompilerDex2Fernflower (class in andro-guard.decompiler.decompiler), 121  
 DecompilerDex2Jad (class in andro-guard.decompiler.decompiler), 122  
 DecompilerDex2WineJad (class in andro-guard.decompiler.decompiler), 122  
 DecompilerJADX (class in andro-guard.decompiler.decompiler), 122  
 default\_colors() (in module androguard.core.androconf), 93  
 default\_config() (andro-guard.core.bytecodes.axml.ARSCResTableConfig class method), 89  
 DefaultAndroAnalysis (class in andro-guard.core.analysis.auto), 22  
 derived\_sequence() (in module andro-guard.decompiler.dad.control\_flow), 100

determineException() (in module andro-	andro-	divfloat2addr() (in module andro-	andro-
guard.core.bytecodes.dvm), 86	guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),
determineNext() (in module andro-	andro-	divint() (in module andro-	andro-
guard.core.bytecodes.dvm), 86	guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),
Dex2Jar (class in androguard.decompiler.decompiler), 123	divint2addr() (in module andro-	divintlit16() (in module andro-	andro-
DexViewer (class in androguard.core.data.data), 92	guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),
Directory (class in androguard.core.data.data), 92	divintlit8() (in module andro-	divlong() (in module andro-	andro-
DirectoryAndroAnalysis (class in andro-	guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),
guard.core.analysis.auto), 24	divlong2addr() (in module andro-	guard.decompiler.dad.opcode_ins),	andro-
disable_colors() (in module androguard.core.androconf), 93	guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),
disable_print_colors() (in module andro-	divlong2addr() (in module andro-	guard.decompiler.dad.opcode_ins),	andro-
guard.core.bytecode), 95	guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),
disassemble() (androguard.core.bytecodes.dvm.DalvikVMF	<del>dm</del> matl()	(in module androguard.decompiler.dad.graph),	103
method), 43			
display_all() (androguard.decompiler.decompiler.DecompilerDAD)	<del>DAD</del>	(androguard.core.bytecodes.axml.AXMLParser	
method), 121		method), 89	
display_all() (androguard.decompiler.decompiler.DecompilerDAD)	<del>DAD</del>	<del>DAD</del> tofloat() (in module andro-	andro-
method), 121		guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),
display_all() (androguard.decompiler.decompiler.DecompilerDAD)	<del>DAD</del>	<del>DAD</del> lower (in module andro-	andro-
method), 122		guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),
display_all() (androguard.decompiler.decompiler.DecompilerDAD)	<del>DAD</del>	<del>DAD</del> bng() (in module andro-	andro-
method), 122		guard.decompiler.dad.opcode_ins),	guard.decompiler.dad.opcode_ins),
display_all() (androguard.decompiler.decompiler.DecompilerDAD)	<del>DAD</del>	<del>DAD</del> WineJad (androguard.decompiler.dad.graph.Graph	
method), 122		method), 103	
display_all() (androguard.decompiler.decompiler.DecompilerDAD)	<del>DAD</del>	<del>DAD</del> ) (in module androguard.decompiler.dad.ast),	97
method), 122		DummyNode (class in andro-	
display_source() (andro-	guard.decompiler.dad.dataflow),	guard.decompiler.dad.dataflow),	
guard.decompiler.decompiler.DecompilerDAD	dump()	101	
method), 121	(androguard.core.analysis.auto.AndroAuto	method), 21	
display_source() (andro-	method),	dump() (androguard.core.analysis.auto.DefaultAndroAnalysis	
guard.decompiler.decompiler.DecompilerDed		method), 24	
method), 121		dump_file() (androguard.core.analysis.auto.AndroAuto	
display_source() (andro-		method), 21	
guard.decompiler.decompiler.DecompilerDex2Fen	<del>flow</del>	<del>flow</del> file() (androguard.core.analysis.auto.DefaultAndroAnalysis	
method), 122		method), 24	
display_source() (andro-		DvClass (class in androguard.decompiler.dad.decompile),	
guard.decompiler.decompiler.DecompilerDex2Jad		101	
method), 122		DvMachine (class in andro-	
display_source() (andro-		guard.decompiler.dad.decompile),	102
guard.decompiler.decompiler.DecompilerDex2Wi	<del>NM</del>	DvMachineBasicBlock (class in andro-	
method), 122		guard.core.analysis.analysis),	18
display_source() (andro-		DvMethod (class in andro-	
guard.decompiler.decompiler.DecompilerJADX		guard.decompiler.dad.decompile),	102
method), 122			
DIV (androguard.decompiler.dad.opcode_ins.Op	attribute),	E	
tribute), 112		each_params_by_register() (andro-	
divdouble() (in module andro-	guard.core.bytecodes.dvm.EncodedMethod		
guard.decompiler.dad.opcode_ins), 114	method),	52	
divdouble2addr() (in module andro-	enable_colors() (in module androguard.core.androconf),		
guard.decompiler.dad.opcode_ins), 114	93		
divfloat() (in module andro-	enable_print_colors() (in module andro-		
guard.decompiler.dad.opcode_ins), 114	guard.core.bytecode),	95	

EncodedAnnotation (class in andro-	FieldHIdItem (class in androguard.core.bytecodes.dvm), 56
EncodedArray (class in androguard.core.bytecodes.dvm), 48	FieldIdItem (class in androguard.core.bytecodes.dvm), 56
EncodedArrayItem (class in andro-	FieldIdItemInvalid (class in andro-
guard.core.bytecodes.dvm), 48	guard.core.bytecodes.dvm), 57
EncodedCatchHandler (class in andro-	File (class in androguard.core.data.data), 92
guard.core.bytecodes.dvm), 49	FileNotFoundException, 31
EncodedCatchHandlerList (class in andro-	files (androguard.core.bytecodes.apk.APK attribute), 25
guard.core.bytecodes.dvm), 49	FillArrayData (class in androguard.core.bytecodes.dvm), 57
EncodedField (class in androguard.core.bytecodes.dvm), 50	fillarraydata() (in module andro-
EncodedMethod (class in andro-	guard.decompiler.dad.opcode_ins), 114
guard.core.bytecodes.dvm), 51	fillarraydatapayload() (in module andro-
EncodedTypeAddrPair (class in andro-	guard.decompiler.dad.opcode_ins), 114
guard.core.bytecodes.dvm), 54	FillArrayExpression (class in andro-
EncodedValue (class in androguard.core.bytecodes.dvm), 55	guard.decompiler.dad.instruction), 106
end() (androguard.core.bytecode.BuffHandle method), 94	FilledArrayExpression (class in andro-
end_ins() (androguard.decompiler.dad.writer.Writer	guard.decompiler.dad.instruction), 106
method), 119	fillednewarray() (in module andro-
EQUAL (androguard.decompiler.dad.opcode_ins.Op at-	guard.decompiler.dad.opcode_ins), 114
tribute), 112	fillednewarrayrange() (in module andro-
Error, 31, 55	guard.decompiler.dad.opcode_ins), 114
ExceptionAnalysis (class in andro-	filter() (androguard.decompiler.decompiler.MethodFilter
guard.core.analysis.analysis), 19	method), 123
Exceptions (class in androguard.core.analysis.analysis), 19	filter_file() (androguard.core.analysis.auto.DefaultAndroAnalysis
Exit() (in module androguard.core.bytecode), 95	method), 24
export_to_gml() (androguard.core.data.data.ApkViewer	find_classes() (androguard.core.analysis.analysis.Analysis
method), 92	method), 14
export_to_gml() (androguard.core.data.data.DexViewer	find_fields() (androguard.core.analysis.analysis.Analysis
method), 92	method), 14
ExportObject (class in androguard.core.bytecodes.dvm), 55	find_methods() (andro-
expression_stmt() (in module andro-	guard.core.analysis.analysis.Analysis method), 14
guard.decompiler.dad.ast), 97	find_strings() (androguard.core.analysis.analysis.Analysis
ExternalClass (class in andro-	method), 14
guard.core.analysis.analysis), 19	finish() (androguard.core.analysis.auto.DefaultAndroAnalysis
ExternalMethod (class in andro-	method), 24
guard.core.analysis.analysis), 20	fix_checksums() (andro-
	guard.core.bytecodes.dvm.DalvikVMFormat
	method), 43
	FLAG_COMPLEX (andro-
	guard.core.bytecodes.axml.ARSCResTableEntry
FakeNop (class in androguard.core.bytecodes.dvm), 55	attribute), 89
fetcher() (androguard.core.analysis.auto.DefaultAndroAnalysis	FLAG_PUBLIC (andro-
method), 24	guard.core.bytecodes.axml.ARSCResTableEntry
fetcher() (androguard.core.analysis.auto.DirectoryAndroAnalysis	attribute), 89
method), 24	FLAG_WEAK (androguard.core.bytecodes.axml.ARSCResTableEntry
field_access() (in module andro-	attribute), 89
guard.decompiler.dad.ast), 97	floattoddble() (in module andro-
FieldAnnotation (class in andro-	guard.decompiler.dad.opcode_ins), 114
guard.core.bytecodes.dvm), 55	floattoint() (in module andro-
FieldClassAnalysis (class in andro-	guard.decompiler.dad.opcode_ins), 114
guard.core.analysis.analysis), 20	floattolong() (in module andro-
	guard.decompiler.dad.opcode_ins), 114

## F

FakeNop (class in androguard.core.bytecodes.dvm), 55	FLAG_PUBLIC (andro-
fetcher() (androguard.core.analysis.auto.DefaultAndroAnalysis	guard.core.bytecodes.axml.ARSCResTableEntry
method), 24	attribute), 89
fetcher() (androguard.core.analysis.auto.DirectoryAndroAnalysis	FLAG_WEAK (androguard.core.bytecodes.axml.ARSCResTableEntry
method), 24	attribute), 89
field_access() (in module andro-	floattoddble() (in module andro-
guard.decompiler.dad.ast), 97	guard.decompiler.dad.opcode_ins), 114
FieldAnnotation (class in andro-	floattoint() (in module andro-
guard.core.bytecodes.dvm), 55	guard.decompiler.dad.opcode_ins), 114
FieldClassAnalysis (class in andro-	floattolong() (in module andro-
guard.core.analysis.analysis), 20	guard.decompiler.dad.opcode_ins), 114

format_value() (androguard.core.bytecodes.axyml.ARSCResourceItem)	(androguard.core.bytecodes.dvm.EncodedField method), 50
format_value() (in module androguard.core.bytecodes.axyml)	get_access_flags_string() (androguard.core.bytecodes.dvm.EncodedMethod method), 52
FormatClassToJava() (in module androguard.core.bytecode)	get_access_flags_string() (in module androguard.core.bytecodes.dvm), 86
FormatClassToPython() (in module androguard.core.bytecode)	get_access_method() (in module androguard.decompiler.dad.util), 119
FormatDescriptorToPython() (in module androguard.core.bytecode)	get_activities() (androguard.core.bytecodes.apk(APK method), 25
FormatNameToPython() (in module androguard.core.bytecode)	get_addr() (androguard.core.bytecodes.dvm.EncodedTypeAddrPair method), 54
<b>G</b>	
GenInvokeRetName (class in androguard.decompiler.dad.graph)	get_address() (androguard.core.bytecodes.dvm.EncodedMethod method), 52
GEQUAL (androguard.decompiler.dad.opcode_ins.Op attribute), 112	get_all() (androguard.decompiler.decompiler.DecompilerDAD method), 121
get() (androguard.core.analysis.analysis.BasicBlocks method), 16	get_all() (androguard.decompiler.decompiler.DecompilerDed method), 121
get() (androguard.core.analysis.analysis.ExceptionAnalysis method), 19	get_all() (androguard.decompiler.decompiler.DecompilerDex2Fernflower method), 122
get() (androguard.core.analysis.analysis.Exceptions method), 19	get_all() (androguard.decompiler.decompiler.DecompilerDex2Jad method), 122
get() (androguard.core.bytecodes.dvm.FieldHIdItem method), 56	get_all() (androguard.decompiler.decompiler.DecompilerDex2WineJad method), 122
get() (androguard.core.bytecodes.dvm.MethodHIdItem method), 76	get_all() (androguard.decompiler.decompiler.DecompilerJADX method), 123
get() (androguard.core.bytecodes.dvm.ProtoHIdItem method), 80	get_all_apks() (androguard.session.Session method), 125
get() (androguard.core.bytecodes.dvm.StringDataItem method), 82	get_all_dex() (androguard.core.bytecodes.apk(APK method), 25
get() (androguard.core.bytecodes.dvm.TypeHIdItem method), 84	get_all_engine() (androguard.core.bytecodes.dvm.ClassManager method), 38
get_access_class() (in module androguard.decompiler.dad.util), 119	get_all_fields() (androguard.core.bytecodes.dvm.DalvikVMFormat method), 43
get_access_field() (in module androguard.decompiler.dad.util), 119	get_analysis() (androguard.session.Session method), 125
get_access_flags() (androguard.core.bytecodes.dvm.ClassDefItem method), 36	get_android_manifest_axml() (androguard.core.bytecodes.apk(APK method), 26
get_access_flags() (androguard.core.bytecodes.dvm.EncodedField method), 50	get_android_manifest_xml() (androguard.core.bytecodes.apk(APK method), 26
get_access_flags() (androguard.core.bytecodes.dvm.EncodedMethod method), 52	get_android_resources() (androguard.core.bytecodes.apk(APK method), 26
get_access_flags_string() (androguard.core.analysis.analysis.ExternalMethod method), 20	get_androidversion_code() (androguard.core.bytecodes.apk(APK method), 26
get_access_flags_string() (androguard.core.bytecodes.dvm.ClassDefItem method), 36	get_androidversion_name() (androguard.core.bytecodes.apk(APK method), 26
	get_annotated_fields_size() (androguard.core.bytecodes.dvm.AnnotationsDirectoryItem

method), 34  
`get_annotated_methods_size()` (andro-  
 guard.core.bytecodes.dvm.AnnotationsDirectoryItem  
 method), 34  
`get_annotated_parameters_size()` (andro-  
 guard.core.bytecodes.dvm.AnnotationsDirectoryItem  
 method), 34  
`get_annotation()` (andro-  
 guard.core.bytecodes.dvm.AnnotationItem  
 method), 32  
`get_annotation_off_item()` (andro-  
 guard.core.bytecodes.dvm.AnnotationSetItem  
 method), 33  
`get_annotations_off()` (andro-  
 guard.core.bytecodes.dvm.AnnotationSetRefItem  
 method), 33  
`get_annotations_off()` (andro-  
 guard.core.bytecodes.dvm.ClassDefItem  
 method), 36  
`get_annotations_off()` (andro-  
 guard.core.bytecodes.dvm.FieldAnnotation  
 method), 55  
`get_annotations_off()` (andro-  
 guard.core.bytecodes.dvm.MethodAnnotation  
 method), 76  
`get_annotations_off()` (andro-  
 guard.core.bytecodes.dvm.ParameterAnnotation  
 method), 79  
`get_api_version()` (andro-  
 guard.core.bytecodes.dvm.DalvikVMFormat  
 method), 43  
`get_app_icon()` (androguard.core.bytecodes.apk.APK  
 method), 26  
`get_app_name()` (androguard.core.bytecodes.apk.APK  
 method), 27  
`get_args()` (in module andro-  
 guard.decompiler.dad.opcode\_ins), 114  
`get_arsc_info()` (in module andro-  
 guard.core.bytecodes.axml), 91  
`get_ascii_string()` (andro-  
 guard.core.bytecodes.dvm.ClassManager  
 method), 38  
`get_ast()` (androguard.core.bytecodes.dvm.ClassDefItem  
 method), 36  
`get_ast()` (androguard.decompiler.dad.ast.JSONWriter  
 method), 97  
`get_ast()` (androguard.decompiler.dad.compile.DvClass  
 method), 101  
`get_ast()` (androguard.decompiler.dad.compile.DvMethod  
 method), 102  
`get_ast_class()` (androguard.decompiler.DecompilerDAD  
 method), 121  
`get_ast_method()` (andro-  
 guard.decompiler.DecompilerDAD  
 method), 121  
`get_basic_block()` (andro-  
 guard.core.analysis.analysis.BasicBlocks  
 method), 16  
`get_basic_block_pos()` (andro-  
 guard.core.analysis.analysis.BasicBlocks  
 method), 16  
`get_basic_blocks()` (andro-  
 guard.core.analysis.analysis.MethodAnalysis  
 method), 20  
`get_bc()` (androguard.core.bytecodes.dvm.DalvikCode  
 method), 41  
`get_bool_resources()` (andro-  
 guard.core.bytecodes.axml.ARSCParser  
 method), 87  
`get_BRANCH_DVM_OPCODES()` (andro-  
 guard.core.bytecodes.dvm.DalvikVMFormat  
 method), 43  
`get_buff()` (androguard.core.bytecodes.axml.AXMLPrinter  
 method), 90  
`get_buff()` (androguard.core.bytecodes.dvm.DalvikOdexVMFormat  
 method), 43  
`get_byte()` (in module androguard.core.bytecodes.dvm),  
 86  
`get_bytecodes()` (andro-  
 guard.core.bytecodes.dvm.DebugInfoItem  
 method), 47  
`get_bytecodes_method()` (in module andro-  
 guard.core.bytecodes.dvm), 86  
`get_bytecodes_methodx()` (in module andro-  
 guard.core.bytecodes.dvm), 86  
`get_call_graph()` (andro-  
 guard.core.analysis.analysis.Analysis  
 method), 14  
`get_catch_all_addr()` (andro-  
 guard.core.bytecodes.dvm.EncodedCatchHandler  
 method), 49  
`get_certificate()` (androguard.core.bytecodes.apk.APK  
 method), 27  
`get_certificate_der()` (andro-  
 guard.core.bytecodes.apk.APK  
 method), 27  
`get_certificate_name_string()` (in module andro-  
 guard.util), 126  
`get_certificates_der_v2()` (andro-  
 guard.core.bytecodes.apk.APK  
 method), 27  
`get_certificates_v2()` (andro-  
 guard.core.bytecodes.apk.APK  
 method), 27  
`get_DADs()` (androguard.core.bytecodes.dvm.DalvikVMFormat  
 method), 44  
`get_class()` (androguard.decompiler.dad.compile.DvMachine  
 method), 102

get\_class\_analysis() (andro-  
guard.core.analysis.analysis.Analysis method),  
15

get\_class\_annotations\_off() (andro-  
guard.core.bytecodes.dvm.AnnotationsDirectoryIt  
method), 34

get\_class\_data() (andro-  
guard.core.bytecodes.dvm.ClassDefItem  
method), 36

get\_class\_data\_item() (andro-  
guard.core.bytecodes.dvm.ClassManager  
method), 38

get\_class\_data\_off() (andro-  
guard.core.bytecodes.dvm.ClassDefItem  
method), 36

get\_class\_idx() (andro-  
guard.core.bytecodes.dvm.ClassDefItem  
method), 37

get\_class\_idx() (andro-  
guard.core.bytecodes.dvm.ClassHDefItem  
method), 38

get\_class\_idx() (andro-  
guard.core.bytecodes.dvm.FieldIdItem  
method), 56

get\_class\_idx() (andro-  
guard.core.bytecodes.dvm.MethodIdItem  
method), 77

get\_class\_manager() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 44

get\_class\_manager() (andro-  
guard.core.bytecodes.dvm.MapList  
method), 75

get\_class\_name() (andro-  
guard.core.analysis.analysis.ExternalMethod  
method), 20

get\_class\_name() (andro-  
guard.core.bytecodes.dvm.EncodedField  
method), 50

get\_class\_name() (andro-  
guard.core.bytecodes.dvm.EncodedMethod  
method), 52

get\_class\_name() (andro-  
guard.core.bytecodes.dvm.FieldIdItem  
method), 56

get\_class\_name() (andro-  
guard.core.bytecodes.dvm.FieldIdItemInvalid  
method), 57

get\_class\_name() (andro-  
guard.core.bytecodes.dvm.MethodIdItem  
method), 77

get\_class\_name() (andro-  
guard.core.bytecodes.dvm.MethodIdItemInvalid  
method), 78

get\_classes() (androguard.core.analysis.analysis.Analysis  
method), 15

get\_classes() (androguard.core.bytecodes.dvm.DalvikVMFormat  
method), 44

get\_classes() (androguard.decompiler.dad.decompile.DvMachine  
method), 102

get\_classes() (androguard.session.Session method), 125

get\_classes\_def\_item() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 44

get\_classes\_names() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 44

get\_cm\_field() (androguard.core.bytecodes.dvm.DalvikVMFormat  
method), 44

get\_cm\_method() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 44

get\_cm\_string() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 44

get\_cm\_type() (androguard.core.bytecodes.dvm.DalvikVMFormat  
method), 44

get\_code() (androguard.core.bytecodes.dvm.ClassManager  
method), 38

get\_code() (androguard.core.bytecodes.dvm.CodeItem  
method), 39

get\_code() (androguard.core.bytecodes.dvm.EncodedMethod  
method), 52

get\_code\_off() (androguard.core.bytecodes.dvm.EncodedMethod  
method), 52

get\_codes\_item() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 44

get\_color\_resources() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 87

get\_cond() (androguard.decompiler.dad.ast.JSONWriter  
method), 97

get\_country() (androguard.core.bytecodes.axml.ARSCResTableConfig  
method), 89

get\_data() (androguard.core.bytecodes.axml.ARSCResStringPoolRef  
method), 89

get\_data() (androguard.core.bytecodes.dvm.FillArrayData  
method), 57

get\_data() (androguard.core.bytecodes.dvm.StringDataItem  
method), 82

get\_data\_type() (andro-  
guard.core.bytecodes.axml.ARSCResStringPoolRef  
method), 89

get\_data\_type\_string() (andro-  
guard.core.bytecodes.axml.ARSCResStringPoolRef  
method), 89

get\_data\_value() (andro-

guard.core.bytecodes.axml.ARSCResStringPool.get\_descriptor\_idx\_value() (andro-  
 method), 89  
 get\_debug() (androguard.core.bytecodes.dvm.DalvikCode  
 method), 41  
 get\_debug() (androguard.core.bytecodes.dvm.EncodedMethod  
 method), 52  
 get\_debug\_info\_item() (andro-  
 guard.core.bytecodes.dvm.DalvikVMFormat  
 method), 44  
 get\_debug\_info\_off() (andro-  
 guard.core.bytecodes.dvm.DalvikCode  
 method), 41  
 get\_debug\_off() (andro-  
 guard.core.bytecodes.dvm.ClassManager  
 method), 38  
 get\_declared\_permissions() (andro-  
 guard.core.bytecodes.apk(APK  
 method), 27  
 get\_declared\_permissions\_details() (andro-  
 guard.core.bytecodes.apk(APK  
 method), 27  
 get\_default\_session() (in module androguard.misc), 124  
 get\_density() (androguard.core.bytecodes.axml.ARSCResTableConfig  
 method), 89  
 get\_dependencies() (andro-  
 guard.core.bytecodes.dvm.DalvikOdexVMFormat  
 method), 43  
 get\_dependencies() (andro-  
 guard.core.bytecodes.dvm.OdexDependencies  
 method), 78  
 get\_descriptor() (andro-  
 guard.core.analysis.analysis.ExternalMethod  
 method), 20  
 get\_descriptor() (andro-  
 guard.core.bytecodes.dvm.EncodedField  
 method), 50  
 get\_descriptor() (andro-  
 guard.core.bytecodes.dvm.EncodedMethod  
 method), 52  
 get\_descriptor() (andro-  
 guard.core.bytecodes.dvm.FieldIdItem  
 method), 56  
 get\_descriptor() (andro-  
 guard.core.bytecodes.dvm.FieldIdItemInvalid  
 method), 57  
 get\_descriptor() (andro-  
 guard.core.bytecodes.dvm.MethodIdItem  
 method), 77  
 get\_descriptor() (andro-  
 guard.core.bytecodes.dvm.MethodIdItemInvalid  
 method), 78  
 get\_descriptor\_idx() (andro-  
 guard.core.bytecodes.dvm.TypeIdItem  
 method), 84  
 get\_details\_permissions() (andro-  
 guard.core.bytecodes.apk(APK  
 method), 27  
 get\_determineException() (andro-  
 guard.core.bytecodes.dvm.DalvikVMFormat  
 method), 44  
 get\_determineNext() (andro-  
 guard.core.bytecodes.dvm.DalvikVMFormat  
 method), 44  
 get\_dex() (androguard.core.bytecodes.apk(APK method),  
 27  
 get\_dex\_names() (androguard.core.bytecodes.apk(APK  
 method), 27  
 get\_digest\_by\_class() (androguard.session.Session  
 method), 125  
 get\_dimen\_resources() (andro-  
 guard.core.bytecodes.axml.ARSCParser  
 method), 87  
 get\_direct\_methods() (andro-  
 guard.core.bytecodes.dvm.ClassDataItem  
 method), 35  
 get\_direct\_methods\_size() (andro-  
 guard.core.bytecodes.dvm.ClassDataItem  
 method), 35  
 get\_effective\_target\_sdk\_version() (andro-  
 guard.core.bytecodes.apk(APK  
 method), 27  
 get\_element() (androguard.core.bytecodes.apk(APK  
 method), 28  
 get\_elements() (androguard.core.bytecodes.apk(APK  
 method), 28  
 get\_elements() (androguard.core.bytecodes.dvm.EncodedAnnotation  
 method), 48  
 get\_encoded\_array\_item() (andro-  
 guard.core.bytecodes.dvm.ClassManager  
 method), 38  
 get\_end() (androguard.core.analysis.analysis.DVMBasicBlock  
 method), 18  
 get\_end() (androguard.decompiler.dad.node.Interval  
 method), 111  
 get\_end() (androguard.decompiler.dad.node.Node  
 method), 111  
 get\_engine() (androguard.core.bytecodes.dvm.ClassManager  
 method), 38  
 get\_exception() (andro-  
 guard.core.analysis.analysis.Exceptions  
 method), 19  
 get\_exception\_analysis() (andro-  
 guard.core.analysis.analysis.DVMBasicBlock  
 method), 18  
 get\_extented\_instruction() (in module andro-

guard.core.bytecodes.dvm), 86  
get\_external\_classes() (andro-  
guard.core.analysis.analysis.Analysis method), 15  
get\_fake\_method() (andro-  
guard.core.analysis.analysis.ClassAnalysis  
method), 17  
get\_features() (androguard.core.bytecodes.apk.APK  
method), 28  
get\_field() (androguard.core.analysis.analysis.FieldClassAnalysis  
method), 20  
get\_field() (androguard.core.bytecodes.dvm.ClassManager  
method), 38  
get\_field() (androguard.core.bytecodes.dvm.DalvikVMFormat)  
method), 44  
get\_field\_analysis() (andro-  
guard.core.analysis.analysis.Analysis method), 15  
get\_field\_analysis() (andro-  
guard.core.analysis.analysis.ClassAnalysis  
method), 18  
get\_field\_annotations() (andro-  
guard.core.bytecodes.dvm.AnnotationsDirectoryItem  
method), 34  
get\_field\_ast() (in module andro-  
guard.decompiler.dad.decompile), 102  
get\_field\_descriptor() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 45  
get\_field\_idx() (androguard.core.bytecodes.dvm.EncodedField  
method), 50  
get\_field\_idx() (androguard.core.bytecodes.dvm.FieldAnnotation  
method), 55  
get\_field\_idx\_diff() (andro-  
guard.core.bytecodes.dvm.EncodedField  
method), 50  
get\_field\_ref() (androguard.core.bytecodes.dvm.ClassManager  
method), 38  
get\_fields() (androguard.core.analysis.analysis.Analysis  
method), 15  
get\_fields() (androguard.core.analysis.analysis.ClassAnalysis  
method), 18  
get\_fields() (androguard.core.bytecodes.dvm.ClassDataItem  
method), 35  
get\_fields() (androguard.core.bytecodes.dvm.ClassDefItem  
method), 37  
get\_fields() (androguard.core.bytecodes.dvm.DalvikVMFormat  
method), 45  
get\_fields\_class() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 45  
get\_fields\_id\_item() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 45  
get\_file() (androguard.core.bytecodes.apk(APK  
method), 28  
get\_filename() (androguard.core.bytecodes.apk(APK  
method), 28  
get\_filename\_by\_class() (androguard.session.Session  
method), 125  
get\_files() (androguard.core.bytecodes.apk(APK  
method), 28  
get\_files\_crc32() (androguard.core.bytecodes.apk(APK  
method), 28  
get\_files\_information() (andro-  
guard.core.bytecodes.apk(APK  
method), 28  
get\_format() (androguard.core.bytecodes.dvm.DalvikVMFormat  
method), 45  
get\_format() (androguard.session.Session method), 125  
get\_format\_type() (andro-  
guard.core.bytecodes.dvm.DalvikOdexVMFormat  
method), 43  
get\_format\_type() (andro-  
guard.core.bytecodes.dvm.DalvikVMFormat  
method), 45  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.FillArrayData  
method), 57  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.Instruction method), 58  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.Instruction21h  
method), 63  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.Instruction21s  
method), 63  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.Instruction31i  
method), 68  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.Instruction511  
method), 73  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.PackedSwitch  
method), 78  
get\_formatted\_operands() (andro-  
guard.core.bytecodes.dvm.SparseSwitch  
method), 81  
get\_handler\_off() (andro-  
guard.core.bytecodes.dvm.TryItem  
method), 83  
get\_handlers() (androguard.core.bytecodes.dvm.DalvikCode  
method), 42  
get\_handlers() (androguard.core.bytecodes.dvm.EncodedCatchHandler

method), 49	get_instance_fields()	(andro-
get_head() (androguard.decompiler.dad.node.Interval	guard.core.bytecodes.dvm.ClassDataItem	guard)
method), 111	method), 35	
get_head() (androguard.decompiler.dad.node.Node	get_instance_fields_size()	(andro-
method), 111	guard.core.bytecodes.dvm.ClassDataItem	guard)
get_header_item()	method), 35	
(andro-	get_instruction()	(andro-
guard.core.bytecodes.dvm.DalvikVMFormat	guard.core.bytecodes.dvm.DalvikCode	guard)
method), 45	method), 42	
get_hex() (androguard.core.bytecodes.dvm.FillArrayData	get_instruction()	(andro-
method), 57	guard.core.bytecodes.dvm.DCode	guard)
get_hex() (androguard.core.bytecodes.dvm.Instruction	method), 40	
method), 58	get_instruction()	(andro-
get_hex() (androguard.core.bytecodes.dvm.PackedSwitch	guard.core.bytecodes.dvm.EncodedMethod	guard)
method), 78	method), 53	
get_hex() (androguard.core.bytecodes.dvm.SparseSwitch	get_instruction()	(in module andro-
method), 81	guard.core.bytecodes.dvm), 86	guard)
get_id() (androguard.core.bytecodes.axml.ARSCParser	get_instruction_payload()	(in module andro-
method), 87	guard.core.bytecodes.dvm), 86	guard)
get_id_resources()	get_instructions()	(andro-
(andro-	guard.core.analysis.analysis.DVMBasicBlock	guard)
guard.core.bytecodes.axml.ARSCParser	method), 18	
method), 87	get_instructions()	(andro-
get_idx() (androguard.core.bytecode.BuffHandle	guard.core.bytecodes.dvm.DCode	guard)
method), 94	method), 40	
get_index() (androguard.core.bytecodes.axml.ARSCResTableEntry	get_instructions()	(andro-
method), 89	guard.core.bytecodes.dvm.EncodedMethod	guard)
get_information()	method), 53	
(andro-	get_instructions()	(andro-
guard.core.bytecodes.dvm.EncodedMethod	guard.core.bytecodes.dvm.LinearSweepAlgorithm	guard)
method), 53	method), 75	
get_init_value()	get_int_value()	(andro-
(andro-	(androguard.decompiler.dad.instruction.Constant	guard)
guard.core.bytecodes.dvm.EncodedField	method), 106	
method), 51	get_integer_resources()	(andro-
get_ins() (androguard.decompiler.dad.basic_blocks.BasicBlock	guard.core.bytecodes.axml.ARSCParser	guard)
method), 98	method), 88	
get_ins() (androguard.decompiler.dad.basic_blocks.Conditi	get_intent_filters()	(androguard.core.bytecodes.apk(APK
method), 99	method), 28	
get_ins() (androguard.decompiler.dad.basic_blocks.LoopBlock	get_interfaces()	(andro-
method), 99	(andro-	guard.core.bytecodes.dvm.ClassDefItem
get_ins() (androguard.decompiler.dad.basic_blocks.ShortCircuitBlock	method), 37	method), 37
method), 99	get_interfaces_off()	(andro-
get_ins_from_loc()	(andro-	guard.core.bytecodes.dvm.ClassDefItem
(andro-	method), 37	method), 37
guard.decompiler.dad.graph.Graph	get_internal_classes()	(andro-
method), 103	(androguard.core.analysis.analysis.Analysis	guard)
get_ins_off() (androguard.core.bytecodes.dvm.DCode	method), 15	
method), 40	get_item()	(androguard.core.bytecodes.dvm.MapItem
get_ins_size() (androguard.core.bytecodes.dvm.DalvikCode	method), 75	
method), 42	get_item_by_offset()	(andro-
get_insns_size()	(andro-	guard.core.bytecodes.dvm.ClassManager
(andro-	method), 83	method), 38
guard.core.bytecodes.dvm.DalvikCode	get_item_type()	(andro-
method), 42	(androguard.core.bytecodes.dvm.MapList	guard)

75  
get\_items() (androguard.core.bytecodes.axml.ARSCParser  
    method), 88  
get\_jar() (androguard.decompiler.decompiler.Dex2Jar  
    method), 123  
get\_key\_data() (androguard.core.bytecodes.axml.ARSCResTableEntry  
    method), 89  
get\_keys() (androguard.core.bytecodes.dvm.PackedSwitch  
    method), 78  
get\_keys() (androguard.core.bytecodes.dvm.SparseSwitch  
    method), 81  
get\_kind() (androguard.core.bytecodes.dvm.Instruction  
    method), 59  
get\_kind() (in module androguard.core.bytecodes.dvm),  
    86  
get\_language() (androguard.core.bytecodes.axml.ARSCResTableConfig  
    method), 89  
get\_last() (androguard.core.analysis.analysis.DVMBasicBlock  
    method), 18  
get\_last\_length() (andro-  
    guard.core.analysis.analysis.DVMBasicBlock  
    method), 18  
get\_lazy\_analysis() (andro-  
    guard.core.bytecodes.dvm.ClassManager  
    method), 38  
get\_len\_methods() (andro-  
    guard.core.bytecodes.dvm.DalvikVMFormat  
    method), 45  
get\_length() (androguard.core.analysis.analysis.MethodAnalyzer  
    method), 20  
get\_length() (androguard.core.bytecodes.dvm.AnnotationElement  
    method), 32  
get\_length() (androguard.core.bytecodes.dvm.AnnotationIter  
    method), 32  
get\_length() (androguard.core.bytecodes.dvm.AnnotationOffsetIter  
    method), 33  
get\_length() (androguard.core.bytecodes.dvm.AnnotationsDictionary  
    method), 34  
get\_length() (androguard.core.bytecodes.dvm.AnnotationSegmentIter  
    method), 33  
get\_length() (androguard.core.bytecodes.dvm.AnnotationSegmentRefIter  
    method), 34  
get\_length() (androguard.core.bytecodes.dvm.ClassDataIter  
    method), 35  
get\_length() (androguard.core.bytecodes.dvm.ClassDefItem  
    method), 37  
get\_length() (androguard.core.bytecodes.dvm.ClassHDefIter  
    method), 38  
get\_length() (androguard.core.bytecodes.dvm.CodeItem  
    method), 39  
get\_length() (androguard.core.bytecodes.dvm.DalvikCode  
    method), 42  
get\_length() (androguard.core.bytecodes.dvm.DCode  
    method), 40  
get\_length() (androguard.core.bytecodes.dvm.DebugInfoItemEmpty  
    method), 47  
get\_length() (androguard.core.bytecodes.dvm.EncodedAnnotation  
    method), 48  
get\_length() (androguard.core.bytecodes.dvm.EncodedArrayTableEntry  
    method), 48  
get\_length() (androguard.core.bytecodes.dvm.EncodedArrayItem  
    method), 49  
get\_length() (androguard.core.bytecodes.dvm.EncodedCatchHandler  
    method), 49  
get\_length() (androguard.core.bytecodes.dvm.EncodedCatchHandlerList  
    method), 50  
get\_length() (androguard.core.bytecodes.dvm.EncodedMethod  
    method), 53  
get\_length() (androguard.core.bytecodes.dvm.EncodedTypeAddrPair  
    method), 54  
get\_length() (androguard.core.bytecodes.dvm.EncodedValue  
    method), 55  
get\_length() (androguard.core.bytecodes.dvm.FakeNop  
    method), 55  
get\_length() (androguard.core.bytecodes.dvm.FieldAnnotation  
    method), 56  
get\_length() (androguard.core.bytecodes.dvm.FieldHIdItem  
    method), 56  
get\_length() (androguard.core.bytecodes.dvm.FieldIdItem  
    method), 57  
get\_length() (androguard.core.bytecodes.dvm.FillArrayData  
    method), 57  
get\_length() (androguard.core.bytecodes.dvm.HeaderItem  
    method), 58  
get\_length() (androguard.core.bytecodes.dvm.Instruction  
    method), 59  
get\_length() (androguard.core.bytecodes.dvm.Instruction10t  
    method), 59  
get\_length() (androguard.core.bytecodes.dvm.Instruction10x  
    method), 60  
get\_length() (androguard.core.bytecodes.dvm.Instruction11n  
    method), 60  
get\_length() (androguard.core.bytecodes.dvm.Instruction11x  
    method), 61  
get\_length() (androguard.core.bytecodes.dvm.Instruction12x  
    method), 61  
get\_length() (androguard.core.bytecodes.dvm.Instruction20bc  
    method), 61  
get\_length() (androguard.core.bytecodes.dvm.Instruction20t  
    method), 62  
get\_length() (androguard.core.bytecodes.dvm.Instruction21c  
    method), 62  
get\_length() (androguard.core.bytecodes.dvm.Instruction21h  
    method), 63  
get\_length() (androguard.core.bytecodes.dvm.Instruction21s  
    method), 63  
get\_length() (androguard.core.bytecodes.dvm.Instruction21t  
    method), 64

get\_length() (androguard.core.bytecodes.dvm.Instruction22) get\_length() (androguard.core.bytecodes.dvm.MethodHIdItem method), 64  
get\_length() (androguard.core.bytecodes.dvm.Instruction22) get\_length() (androguard.core.bytecodes.dvm.MethodIdItem method), 64  
get\_length() (androguard.core.bytecodes.dvm.Instruction22) get\_length() (androguard.core.bytecodes.dvm.PackedSwitch method), 65  
get\_length() (androguard.core.bytecodes.dvm.Instruction22) get\_length() (androguard.core.bytecodes.dvm.ParameterAnnotation method), 65  
get\_length() (androguard.core.bytecodes.dvm.Instruction22) get\_length() (androguard.core.bytecodes.dvm.ProtoHIdItem method), 66  
get\_length() (androguard.core.bytecodes.dvm.Instruction22) get\_length() (androguard.core.bytecodes.dvm.ProtoIdItem method), 66  
get\_length() (androguard.core.bytecodes.dvm.Instruction23) get\_length() (androguard.core.bytecodes.dvm.SparseSwitch method), 67  
get\_length() (androguard.core.bytecodes.dvm.Instruction30) get\_length() (androguard.core.bytecodes.dvm.StringDataItem method), 67  
get\_length() (androguard.core.bytecodes.dvm.Instruction31) get\_length() (androguard.core.bytecodes.dvm.StringIdItem method), 67  
get\_length() (androguard.core.bytecodes.dvm.Instruction31) get\_length() (androguard.core.bytecodes.dvm.TryItem method), 68  
get\_length() (androguard.core.bytecodes.dvm.Instruction31) get\_length() (androguard.core.bytecodes.dvm.TypeHIdItem method), 68  
get\_length() (androguard.core.bytecodes.dvm.Instruction32) get\_length() (androguard.core.bytecodes.dvm.TypeIdItem method), 69  
get\_length() (androguard.core.bytecodes.dvm.Instruction35) get\_length() (androguard.core.bytecodes.dvm.TypeItem method), 69  
get\_length() (androguard.core.bytecodes.dvm.Instruction35) get\_length() (androguard.core.bytecodes.dvm.TypeList method), 70  
get\_length() (androguard.core.bytecodes.dvm.Instruction35) get\_length() (androguard.core.bytecodes.dvm.Unresolved method), 70  
get\_length() (androguard.core.bytecodes.dvm.Instruction3rc) get\_lhs() (androguard.decompiler.dad.instruction.AssignExpression method), 71  
get\_length() (androguard.core.bytecodes.dvm.Instruction3rg) get\_lhs() (androguard.decompiler.dad.instruction.ConditionalExpression method), 71  
get\_length() (androguard.core.bytecodes.dvm.Instruction3rn) get\_lhs() (androguard.decompiler.dad.instruction.ConditionalZExpression method), 71  
get\_length() (androguard.core.bytecodes.dvm.Instruction40) get\_lhs() (androguard.decompiler.dad.instruction.InstanceInstruction method), 72  
get\_length() (androguard.core.bytecodes.dvm.Instruction41) get\_lhs() (androguard.decompiler.dad.instruction.IRForm method), 72  
get\_length() (androguard.core.bytecodes.dvm.Instruction51) get\_lhs() (androguard.decompiler.dad.instruction.MoveExceptionExpression method), 73  
get\_length() (androguard.core.bytecodes.dvm.Instruction52) get\_lhs() (androguard.decompiler.dad.instruction.MoveExpression method), 73  
get\_length() (androguard.core.bytecodes.dvm.Instruction5rc) get\_lhs() (androguard.decompiler.dad.instruction.NopExpression method), 74  
get\_length() (androguard.core.bytecodes.dvm.InstructionInv) get\_lhs() (androguard.decompiler.dad.instruction.ReturnInstruction method), 74  
get\_length() (androguard.core.bytecodes.dvm.MapItem) get\_lhs() (androguard.decompiler.dad.instruction.StaticInstruction method), 75  
get\_length() (androguard.core.bytecodes.dvm.MapList) get\_libraries() (androguard.core.bytecodes.apk.APK method), 29  
get\_length() (androguard.core.bytecodes.dvm.MethodAnnotation) get\_line\_start() (androguard.core.bytecodes.dvm.DebugInfoItem method), 76

method), 47  
get\_list() (androguard.core.bytecodes.dvm.AnnotationSetRefList method), 34  
get\_list() (androguard.core.bytecodes.dvm.EncodedCatchHandlerList method), 15  
get\_list() (androguard.core.bytecodes.dvm.FieldIdItem method), 50  
get\_list() (androguard.core.bytecodes.dvm.FieldIdItem method), 57  
get\_list() (androguard.core.bytecodes.dvm.FieldIdItemInvalid method), 57  
get\_list() (androguard.core.bytecodes.dvm.MethodIdItem method), 77  
get\_list() (androguard.core.bytecodes.dvm.MethodIdItemInvalid method), 78  
get\_list() (androguard.core.bytecodes.dvm.TypeList method), 85  
get\_literals() (androguard.core.bytecodes.dvm.Instruction method), 59  
get\_literals() (androguard.core.bytecodes.dvm.Instruction11n method), 60  
get\_literals() (androguard.core.bytecodes.dvm.Instruction21h method), 63  
get\_literals() (androguard.core.bytecodes.dvm.Instruction21l method), 63  
get\_literals() (androguard.core.bytecodes.dvm.Instruction22b method), 64  
get\_literals() (androguard.core.bytecodes.dvm.Instruction22s method), 65  
get\_literals() (androguard.core.bytecodes.dvm.Instruction31 method), 68  
get\_literals() (androguard.core.bytecodes.dvm.Instruction51l method), 73  
get\_loc\_with\_ins() (androguard.decompiler.dad.basic\_blocks.BasicBlock method), 98  
get\_loc\_with\_ins() (androguard.decompiler.dad.basic\_blocks.Condition method), 99  
get\_loc\_with\_ins() (androguard.decompiler.dad.basic\_blocks.LoopBlock method), 99  
get\_loc\_with\_ins() (androguard.decompiler.dad.basic\_blocks.ShortCircuitBlock method), 99  
get\_loc\_with\_ins() (androguard.decompiler.dad.dataflow.DummyNode method), 101  
get\_locales() (androguard.core.bytecodes.axml.ARSCPParser method), 88  
get\_locals() (androguard.core.bytecodes.dvm.EncodedMethod method), 53  
get\_main\_activity() (androguard.core.bytecodes.apk(APK method), 29  
get\_max\_sdk\_version() (andro-

guard.core.bytecodes.apk(APK method), 29  
get\_method() (androguard.core.analysis.analysis.Analysis method), 15  
get\_method() (androguard.core.analysis.analysis.DVMBasicBlock method), 18  
get\_method() (androguard.core.analysis.analysis.ExternalClass method), 19  
get\_method() (androguard.core.analysis.analysis.MethodAnalysis method), 20  
get\_method() (androguard.core.analysis.analysis.MethodClassAnalysis method), 21  
get\_method() (androguard.core.bytecodes.dvm.ClassHDefItem method), 38  
get\_method() (androguard.core.bytecodes.dvm.ClassManager method), 39  
get\_method() (androguard.core.bytecodes.dvm.DalvikVMFormat method), 45  
get\_method\_analysis() (androguard.core.analysis.analysis.Analysis method), 15  
get\_method\_annotations() (androguard.core.bytecodes.dvm.AnnotationsDirectoryItem method), 35  
get\_method\_by\_idx() (androguard.core.bytecodes.dvm.DalvikVMFormat method), 45  
get\_method\_by\_name() (androguard.core.analysis.analysis.Analysis method), 16  
get\_method\_descriptor() (androguard.core.bytecodes.dvm.DalvikVMFormat method), 45  
get\_method\_idx() (androguard.core.bytecodes.dvm.EncodedMethod method), 53  
get\_method\_idx() (androguard.core.bytecodes.dvm.MethodAnnotation method), 76  
get\_method\_idx() (androguard.core.bytecodes.dvm.ParameterAnnotation method), 79  
get\_method\_idx\_diff() (androguard.core.bytecodes.dvm.EncodedMethod method), 53  
get\_method\_ref() (androguard.core.bytecodes.dvm.ClassManager method), 39

get\_methods() (androguard.core.analysis.analysis.Analysis get\_name() (androguard.core.bytecodes.dvm.MethodIdItem method), 16  
 get\_methods() (androguard.core.analysis.analysis.ClassAnalyzer get\_name() (androguard.core.bytecodes.dvm.MethodIdItemInvalid method), 77  
 get\_methods() (androguard.core.analysis.analysis.ExternalClass get\_name() (androguard.core.bytecodes.dvm.PackedSwitch method), 78  
 get\_methods() (androguard.core.bytecodes.dvm.ClassDataItem get\_name() (androguard.core.bytecodes.dvm.SparseSwitch method), 19  
 get\_methods() (androguard.core.bytecodes.dvm.ClassDefItem get\_name() (androguard.core.bytecodes.dvm.Unresolved method), 35  
 get\_methods() (androguard.core.bytecodes.dvm.ClassDefItem get\_name() (androguard.core.bytecodes.dvm.Unresolved method), 81  
 get\_methods() (androguard.core.bytecodes.dvm.ClassDefItem get\_name() (androguard.core.bytecodes.dvm.Unresolved method), 37  
 get\_methods() (androguard.core.bytecodes.dvm.DalvikVMFormat get\_name\_idx() (androguard.core.bytecodes.dvm.AnnotationElement method), 46  
 get\_methods() (androguard.decompiler.dad.decompile.DvClass get\_name\_idx() (androguard.core.bytecodes.dvm.FieldIdItem method), 101  
 get\_methods\_class() (androguard.core.bytecodes.dvm.DalvikVMFormat get\_name\_idx() (androguard.core.bytecodes.dvm.FieldIdItem method), 32  
 get\_methods\_descriptor() (androguard.core.bytecodes.dvm.DalvikVMFormat get\_name\_idx() (androguard.core.bytecodes.dvm.FieldIdItem method), 46  
 get\_methods\_id\_item() (androguard.core.bytecodes.dvm.DalvikVMFormat get\_name\_idx() (androguard.core.bytecodes.dvm.FieldIdItem method), 46  
 get\_min\_sdk\_version() (androguard.core.bytecodes.apk.APK get\_nb\_instructions() (androguard.core.analysis.analysis.DVMBasicBlock method), 29  
 get\_mResId() (androguard.core.bytecodes.axml.PackageContext get\_nb\_methods() (androguard.core.analysis.analysis.ClassAnalysis method), 90  
 get\_name() (androguard.core.analysis.analysis.DVMBasicBlock get\_nb\_strings() (androguard.session.Session method), 18  
 get\_name() (androguard.core.analysis.analysis.ExternalClass get\_next() (androguard.core.analysis.analysis.DVMBasicBlock method), 18  
 get\_name() (androguard.core.analysis.analysis.ExternalMethod get\_next\_offset\_item() (androguard.core.bytecodes.dvm.ClassManager method), 20  
 get\_name() (androguard.core.bytecode.TmpBlock get\_node\_from\_loc() (androguard.decompiler.dad.graph.Graph method), 95  
 get\_name() (androguard.core.bytecodes.axml.ARSCResTablePackage get\_notes() (androguard.core.analysis.analysis.DVMBasicBlock method), 103  
 get\_name() (androguard.core.bytecodes.dvm.ClassDefItem get\_notes() (androguard.core.bytecodes.dvm.FillArrayData method), 89  
 get\_name() (androguard.core.bytecodes.dvm.ClassDefItem get\_notes() (androguard.core.bytecodes.dvm.PackedSwitch method), 37  
 get\_name() (androguard.core.bytecodes.dvm.EncodedField get\_notes() (androguard.core.bytecodes.dvm.SparseSwitch method), 51  
 get\_name() (androguard.core.bytecodes.dvm.EncodedMethod get\_obj() (androguard.core.bytecodes.dvm.AnnotationElement method), 53  
 get\_name() (androguard.core.bytecodes.dvm.FieldIdItem get\_obj() (androguard.core.bytecodes.dvm.AnnotationItem method), 57  
 get\_name() (androguard.core.bytecodes.dvm.FieldIdItemInvalid get\_obj() (androguard.core.bytecodes.dvm.AnnotationItem method), 32  
 get\_name() (androguard.core.bytecodes.dvm.FillArrayData get\_obj() (androguard.core.bytecodes.dvm.AnnotationOffItem method), 58  
 get\_name() (androguard.core.bytecodes.dvm.Instruction get\_obj() (androguard.core.bytecodes.dvm.AnnotationsDirectoryItem method), 59  
 get\_name() (androguard.core.bytecodes.dvm.InstructionInvalid get\_obj() (androguard.core.bytecodes.dvm.AnnotationsDirectoryItem method), 74  
 get\_name() (androguard.core.bytecodes.dvm.InstructionInvalid get\_obj() (androguard.core.bytecodes.dvm.AnnotationSetItem method), 35

method), 33  
get\_obj() (androguard.core.bytecodes.dvm.AnnotationSetRefItem method), 33  
get\_obj() (androguard.core.bytecodes.dvm.AnnotationSetRefList method), 34  
get\_obj() (androguard.core.bytecodes.dvm.ClassDataItem method), 35  
get\_obj() (androguard.core.bytecodes.dvm.ClassDefItem method), 37  
get\_obj() (androguard.core.bytecodes.dvm.ClassHDefItem method), 38  
get\_obj() (androguard.core.bytecodes.dvm.CodeItem method), 39  
get\_obj() (androguard.core.bytecodes.dvm.DalvikCode method), 42  
get\_obj() (androguard.core.bytecodes.dvm.DBGBytecode method), 40  
get\_obj() (androguard.core.bytecodes.dvm.DebugInfoItemEmpty method), 47  
get\_obj() (androguard.core.bytecodes.dvm.EncodedAnnotation method), 48  
get\_obj() (androguard.core.bytecodes.dvm.EncodedArray method), 48  
get\_obj() (androguard.core.bytecodes.dvm.EncodedArrayItem method), 49  
get\_obj() (androguard.core.bytecodes.dvm.EncodedCatchHandler method), 50  
get\_obj() (androguard.core.bytecodes.dvm.EncodedField method), 51  
get\_obj() (androguard.core.bytecodes.dvm.EncodedTypeAdder method), 54  
get\_obj() (androguard.core.bytecodes.dvm.EncodedValue method), 55  
get\_obj() (androguard.core.bytecodes.dvm.FieldAnnotation method), 56  
get\_obj() (androguard.core.bytecodes.dvm.FieldHIdItem method), 56  
get\_obj() (androguard.core.bytecodes.dvm.FieldIdItem method), 57  
get\_obj() (androguard.core.bytecodes.dvm.HeaderItem method), 58  
get\_obj() (androguard.core.bytecodes.dvm.MapItem method), 75  
get\_obj() (androguard.core.bytecodes.dvm.MapList method), 75  
get\_obj() (androguard.core.bytecodes.dvm.MethodAnnotation method), 76  
get\_obj() (androguard.core.bytecodes.dvm.MethodHIdItem method), 77  
get\_obj() (androguard.core.bytecodes.dvm.ParameterAnnotation method), 79  
get\_obj() (androguard.core.bytecodes.dvm.ProtoHIdItem method), 80  
get\_obj() (androguard.core.bytecodes.dvm.StringDataItem method), 82  
get\_obj() (androguard.core.bytecodes.dvm.StringIdItem method), 83  
get\_obj() (androguard.core.bytecodes.dvm.TypeHIdItem method), 84  
get\_obj() (androguard.core.bytecodes.dvm.TypeIdItem method), 84  
get\_obj() (androguard.core.bytecodes.dvm.TypeItem method), 85  
get\_obj() (androguard.core.bytecodes.dvm.TypeList method), 85  
get\_obj\_by\_offset() (androguard.core.bytecodes.dvm.ClassManager method), 39  
get\_objects\_apk() (androguard.session.Session method), 125  
get\_objects\_dex() (androguard.session.Session method), 125  
get\_odex\_format() (androguard.core.bytecodes.dvm.ClassManager method), 39  
get\_off() (androguard.core.bytecodes.dvm.AnnotationsDirectoryItem method), 35  
get\_off() (androguard.core.bytecodes.dvm.AnnotationSetItem method), 33  
get\_off() (androguard.core.bytecodes.dvm.AnnotationSetRefList method), 34  
get\_off() (androguard.core.bytecodes.dvm.ClassDataItem method), 36  
get\_off() (androguard.core.bytecodes.dvm.ClassHDefItem method), 38  
get\_off() (androguard.core.bytecodes.dvm.CodeItem method), 39  
get\_off() (androguard.core.bytecodes.dvm.DalvikCode method), 42  
get\_off() (androguard.core.bytecodes.dvm.DebugInfoItemEmpty method), 47  
get\_off() (androguard.core.bytecodes.dvm.EncodedArrayItem method), 49  
get\_off() (androguard.core.bytecodes.dvm.EncodedCatchHandler method), 49  
get\_off() (androguard.core.bytecodes.dvm.EncodedCatchHandlerList method), 50  
get\_off() (androguard.core.bytecodes.dvm.FieldAnnotation method), 56  
get\_off() (androguard.core.bytecodes.dvm.FieldHIdItem method), 56

method), 56  
`get_off()` (androguard.core.bytecodes.dvm.HeaderItem  
 method), 58  
`get_off()` (androguard.core.bytecodes.dvm.MapItem  
 method), 75  
`get_off()` (androguard.core.bytecodes.dvm.MapList  
 method), 75  
`get_off()` (androguard.core.bytecodes.dvm.MethodAnnotation  
 method), 76  
`get_off()` (androguard.core.bytecodes.dvm.MethodHIdItem  
 method), 76  
`get_off()` (androguard.core.bytecodes.dvm.ParameterAnnotation  
 method), 79  
`get_off()` (androguard.core.bytecodes.dvm.ProtoHIdItem  
 method), 80  
`get_off()` (androguard.core.bytecodes.dvm.StringDataItem  
 method), 82  
`get_off()` (androguard.core.bytecodes.dvm.StringIdItem  
 method), 83  
`get_off()` (androguard.core.bytecodes.dvm.TryItem  
 method), 83  
`get_off()` (androguard.core.bytecodes.dvm.TypeHIdItem  
 method), 84  
`get_off()` (androguard.core.bytecodes.dvm.TypeList  
 method), 85  
`get_offset()` (androguard.core.bytecodes.dvm.MapItem  
 method), 75  
`get_op_value()` (androguard.core.bytecodes.dvm.DBGBytecode  
 method), 40  
`get_op_value()` (androguard.core.bytecodes.dvm.FillArrayData  
 method), 58  
`get_op_value()` (androguard.core.bytecodes.dvm.Instruction  
 method), 59  
`get_op_value()` (androguard.core.bytecodes.dvm.PackedSwitch  
 method), 79  
`get_op_value()` (androguard.core.bytecodes.dvm.SparseSwitch  
 method), 81  
`get_op_value()` (androguard.core.bytecodes.dvm.Unresolved  
 method), 86  
`get_operand_html()` (andro-  
 guard.core.bytecodes.dvm.DalvikVMFormat  
 method), 46  
`get_operands()` (androguard.core.bytecodes.dvm.ConstString  
 method), 39  
`get_operands()` (androguard.core.bytecodes.dvm.FillArrayDg  
 method), 58  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction  
 method), 59  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction10t  
 method), 60  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction10t  
 method), 60  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction10t  
 method), 60  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction10t  
 method), 60  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction11x  
 method), 61  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction12x  
 method), 61  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction20bc  
 method), 61  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction20t  
 method), 62  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction21c  
 method), 62  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction21h  
 method), 63  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction21s  
 method), 63  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction21t  
 method), 64  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction22b  
 method), 64  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction22c  
 method), 65  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction22cs  
 method), 65  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction22s  
 method), 66  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction22t  
 method), 66  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction23x  
 method), 67  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction30t  
 method), 67  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction31c  
 method), 67  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction31i  
 method), 68  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction31t  
 method), 68  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction32x  
 method), 69  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction35c  
 method), 69  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction35mi  
 method), 70  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction35ms  
 method), 70  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction3rc  
 method), 71  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction40t  
 method), 71  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction40t  
 method), 72  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction40t  
 method), 72  
`get_operands()` (androguard.core.bytecodes.dvm.Instruction40sc  
 method), 72

get\_operands() (androguard.core.bytecodes.dvm.Instruction41c method), 66  
    method), 72  
        get\_output() (androguard.core.bytecodes.dvm.Instruction22t  
            method), 66  
get\_operands() (androguard.core.bytecodes.dvm.Instruction511 method), 66  
    method), 73  
        get\_output() (androguard.core.bytecodes.dvm.Instruction22x  
            method), 66  
get\_operands() (androguard.core.bytecodes.dvm.Instruction52c method), 66  
    method), 73  
        get\_output() (androguard.core.bytecodes.dvm.Instruction23x  
            method), 67  
get\_operands() (androguard.core.bytecodes.dvm.Instruction5rc method), 67  
    method), 74  
        get\_output() (androguard.core.bytecodes.dvm.Instruction30t  
            method), 67  
get\_operands() (androguard.core.bytecodes.dvm.InstructionInvalid method), 67  
    method), 74  
        get\_output() (androguard.core.bytecodes.dvm.Instruction31c  
            method), 68  
get\_operands() (androguard.core.bytecodes.dvm.PackedSwitch method), 68  
    method), 79  
        get\_output() (androguard.core.bytecodes.dvm.Instruction31i  
            method), 68  
get\_operands() (androguard.core.bytecodes.dvm.SparseSwitch method), 68  
    method), 81  
        get\_output() (androguard.core.bytecodes.dvm.Instruction31t  
            method), 68  
get\_operands() (androguard.core.bytecodes.dvm.Unresolved method), 69  
    method), 86  
        get\_output() (androguard.core.bytecodes.dvm.Instruction32x  
            method), 69  
get\_optimized\_instruction() (in module andro-  
    guard.core.bytecodes.dvm), 87  
get\_orig\_value() (andro-  
    guard.core.analysis.analysis.StringAnalysis  
        method), 21  
get\_output() (androguard.core.bytecodes.dvm.FillArrayData get\_output() (androguard.core.bytecodes.dvm.Instruction35ms  
    method), 58  
        method), 70  
get\_output() (androguard.core.bytecodes.dvm.Instruction get\_output() (androguard.core.bytecodes.dvm.Instruction3rc  
    method), 59  
        method), 71  
get\_output() (androguard.core.bytecodes.dvm.Instruction10 get\_output() (androguard.core.bytecodes.dvm.Instruction3rmi  
    method), 60  
        method), 71  
get\_output() (androguard.core.bytecodes.dvm.Instruction10 get\_output() (androguard.core.bytecodes.dvm.Instruction3rms  
    method), 60  
        method), 72  
get\_output() (androguard.core.bytecodes.dvm.Instruction11 get\_output() (androguard.core.bytecodes.dvm.Instruction40sc  
    method), 60  
        method), 72  
get\_output() (androguard.core.bytecodes.dvm.Instruction11 get\_output() (androguard.core.bytecodes.dvm.Instruction41c  
    method), 61  
        method), 72  
get\_output() (androguard.core.bytecodes.dvm.Instruction12 get\_output() (androguard.core.bytecodes.dvm.Instruction511  
    method), 61  
        method), 73  
get\_output() (androguard.core.bytecodes.dvm.Instruction20 get\_output() (androguard.core.bytecodes.dvm.Instruction52c  
    method), 62  
        method), 73  
get\_output() (androguard.core.bytecodes.dvm.Instruction20 get\_output() (androguard.core.bytecodes.dvm.Instruction5rc  
    method), 62  
        method), 74  
get\_output() (androguard.core.bytecodes.dvm.Instruction21 get\_output() (androguard.core.bytecodes.dvm.InstructionInvalid  
    method), 62  
        method), 74  
get\_output() (androguard.core.bytecodes.dvm.Instruction21 get\_output() (androguard.core.bytecodes.dvm.PackedSwitch  
    method), 63  
        method), 79  
get\_output() (androguard.core.bytecodes.dvm.Instruction21 get\_output() (androguard.core.bytecodes.dvm.SparseSwitch  
    method), 63  
        method), 82  
get\_output() (androguard.core.bytecodes.dvm.Instruction21 get\_output() (androguard.core.bytecodes.dvm.Unresolved  
    method), 64  
        method), 86  
get\_output() (androguard.core.bytecodes.dvm.Instruction22 get\_outs\_size()  
    method), 64  
        (andro-  
            guard.core.bytecodes.dvm.DalvikCode  
get\_output() (androguard.core.bytecodes.dvm.Instruction22c  
    method), 65  
        method), 42  
        get\_package() (androguard.core.bytecodes.apk(APK  
get\_output() (androguard.core.bytecodes.dvm.Instruction22cs  
    method), 65  
        method), 29  
        get\_package\_name()  
get\_output() (androguard.core.bytecodes.dvm.Instruction22s  
    method), 65  
        (andro-  
            guard.core.bytecodes.axml.ARSCResType

method), 89  
`get_package_name()` (andro-  
 guard.core.bytecodes.axml.PackageContext  
 method), 90  
`get_packages_names()` (andro-  
 guard.core.bytecodes.axml.ARSCParser  
 method), 88  
`get_pad()` (androguard.core.bytecodes.dvm.TypeList  
 method), 85  
`get_parameter_annotations()` (andro-  
 guard.core.bytecodes.dvm.AnnotationsDirectoryItem  
 method), 35  
`get_parameter_names()` (andro-  
 guard.core.bytecodes.dvm.DebugInfoItem  
 method), 47  
`get_parameters_off()` (andro-  
 guard.core.bytecodes.dvm.ProtoidItem  
 method), 80  
`get_parameters_off_value()` (andro-  
 guard.core.bytecodes.dvm.ProtoidItem  
 method), 80  
`get_parameters_size()` (andro-  
 guard.core.bytecodes.dvm.DebugInfoItem  
 method), 47  
`get_params()` (androguard.core.bytecodes.dvm.ProtoidItem  
 method), 81  
`get_params_info()` (in module  
 androguard.core.bytecodes.dvm), 87  
`get_params_type()` (in module  
 androguard.decompiler.dad.util), 119  
`get_permissions()` (androguard.core.bytecodes.apk.APK  
 method), 29  
`get_prev()` (androguard.core.analysis.analysis.DVMBasicBlock  
 method), 19  
`get_proto()` (androguard.core.bytecodes.dvm.ClassManager  
 method), 39  
`get_proto()` (androguard.core.bytecodes.dvm.MethodIdItem  
 method), 77  
`get_proto()` (androguard.core.bytecodes.dvm.MethodIdItem  
 method), 78  
`get_proto_idx()` (andro-  
 guard.core.bytecodes.dvm.MethodIdItem  
 method), 77  
`get_providers()` (androguard.core.bytecodes.apk.APK  
 method), 29  
`get_public_resources()` (andro-  
 guard.core.bytecodes.axml.ARSCParser  
 method), 88  
`get_raw()` (androguard.core.bytecodes.apk.APK method),  
 29  
`get_raw()` (androguard.core.bytecodes.dvm.AnnotationElement  
 method), 32  
`get_raw()` (androguard.core.bytecodes.dvm.AnnotationItem  
 method), 32  
`get_raw()` (androguard.core.bytecodes.dvm.AnnotationOffItem  
 method), 33  
`get_raw()` (androguard.core.bytecodes.dvm.AnnotationsDirectoryItem  
 method), 35  
`get_raw()` (androguard.core.bytecodes.dvm.AnnotationSetItem  
 method), 33  
`get_raw()` (androguard.core.bytecodes.dvm.AnnotationSetRefItem  
 method), 33  
`get_raw()` (androguard.core.bytecodes.dvm.AnnotationSetRefList  
 method), 34  
`get_raw()` (androguard.core.bytecodes.dvm.ClassDataItem  
 method), 36  
`get_raw()` (androguard.core.bytecodes.dvm.ClassDefItem  
 method), 37  
`get_raw()` (androguard.core.bytecodes.dvm.ClassHDefItem  
 method), 38  
`get_raw()` (androguard.core.bytecodes.dvm.CodeItem  
 method), 39  
`get_raw()` (androguard.core.bytecodes.dvm.DalvikCode  
 method), 42  
`get_raw()` (androguard.core.bytecodes.dvm.DBGBytecode  
 method), 40  
`get_raw()` (androguard.core.bytecodes.dvm.DCode  
 method), 41  
`get_raw()` (androguard.core.bytecodes.dvm.DebugInfoItem  
 method), 47  
`get_raw()` (androguard.core.bytecodes.dvm.DebugInfoItemEmpty  
 method), 47  
`get_raw()` (androguard.core.bytecodes.dvm.EncodedAnnotation  
 method), 48  
`get_raw()` (androguard.core.bytecodes.dvm.EncodedArray  
 method), 48  
`get_raw()` (androguard.core.bytecodes.dvm.EncodedArrayItem  
 method), 49  
`get_raw()` (androguard.core.bytecodes.dvm.EncodedCatchHandler  
 method), 49  
`get_raw()` (androguard.core.bytecodes.dvm.EncodedCatchHandlerList  
 method), 50  
`get_raw()` (androguard.core.bytecodes.dvm.EncodedField  
 method), 51  
`get_raw()` (androguard.core.bytecodes.dvm.EncodedMethod  
 method), 53  
`get_raw()` (androguard.core.bytecodes.dvm.EncodedTypeAddrPair  
 method), 54  
`get_raw()` (androguard.core.bytecodes.dvm.EncodedValue  
 method), 55  
`get_raw()` (androguard.core.bytecodes.dvm.FieldAnnotation  
 method), 56  
`get_raw()` (androguard.core.bytecodes.dvm.FieldHIdItem  
 method), 56  
`get_raw()` (androguard.core.bytecodes.dvm.FieldIdItem  
 method), 57  
`get_raw()` (androguard.core.bytecodes.dvm.FillArrayData  
 method), 58

get\_raw() (androguard.core.bytecodes.dvm.HeaderItem method), 58  
get\_raw() (androguard.core.bytecodes.dvm.Instruction method), 59  
get\_raw() (androguard.core.bytecodes.dvm.Instruction10t method), 60  
get\_raw() (androguard.core.bytecodes.dvm.Instruction10x method), 60  
get\_raw() (androguard.core.bytecodes.dvm.Instruction11n method), 61  
get\_raw() (androguard.core.bytecodes.dvm.Instruction11x method), 61  
get\_raw() (androguard.core.bytecodes.dvm.Instruction12x method), 61  
get\_raw() (androguard.core.bytecodes.dvm.Instruction20bc method), 62  
get\_raw() (androguard.core.bytecodes.dvm.Instruction20t method), 62  
get\_raw() (androguard.core.bytecodes.dvm.Instruction21c method), 62  
get\_raw() (androguard.core.bytecodes.dvm.Instruction21h method), 63  
get\_raw() (androguard.core.bytecodes.dvm.Instruction21s method), 63  
get\_raw() (androguard.core.bytecodes.dvm.Instruction21t method), 64  
get\_raw() (androguard.core.bytecodes.dvm.Instruction22b method), 64  
get\_raw() (androguard.core.bytecodes.dvm.Instruction22c method), 65  
get\_raw() (androguard.core.bytecodes.dvm.Instruction22cs method), 65  
get\_raw() (androguard.core.bytecodes.dvm.Instruction22s method), 66  
get\_raw() (androguard.core.bytecodes.dvm.Instruction22t method), 66  
get\_raw() (androguard.core.bytecodes.dvm.Instruction22x method), 66  
get\_raw() (androguard.core.bytecodes.dvm.Instruction23x method), 67  
get\_raw() (androguard.core.bytecodes.dvm.Instruction30t method), 67  
get\_raw() (androguard.core.bytecodes.dvm.Instruction31c method), 68  
get\_raw() (androguard.core.bytecodes.dvm.Instruction31i method), 68  
get\_raw() (androguard.core.bytecodes.dvm.Instruction31t method), 69  
get\_raw() (androguard.core.bytecodes.dvm.Instruction32x method), 69  
get\_raw() (androguard.core.bytecodes.dvm.Instruction35c method), 69  
get\_raw() (androguard.core.bytecodes.dvm.Instruction35mi method), 70  
get\_raw() (androguard.core.bytecodes.dvm.Instruction35ms method), 70  
get\_raw() (androguard.core.bytecodes.dvm.Instruction3rc method), 71  
get\_raw() (androguard.core.bytecodes.dvm.Instruction3rmi method), 71  
get\_raw() (androguard.core.bytecodes.dvm.Instruction3rms method), 72  
get\_raw() (androguard.core.bytecodes.dvm.Instruction40sc method), 72  
get\_raw() (androguard.core.bytecodes.dvm.Instruction41c method), 73  
get\_raw() (androguard.core.bytecodes.dvm.Instruction51l method), 73  
get\_raw() (androguard.core.bytecodes.dvm.Instruction52c method), 73  
get\_raw() (androguard.core.bytecodes.dvm.Instruction5rc method), 74  
get\_raw() (androguard.core.bytecodes.dvm.InstructionInvalid method), 74  
get\_raw() (androguard.core.bytecodes.dvm.MapItem method), 75  
get\_raw() (androguard.core.bytecodes.dvm.MapList method), 76  
get\_raw() (androguard.core.bytecodes.dvm.MethodAnnotation method), 76  
get\_raw() (androguard.core.bytecodes.dvm.MethodHIdItem method), 76  
get\_raw() (androguard.core.bytecodes.dvm.MethodIdItem method), 77  
get\_raw() (androguard.core.bytecodes.dvm.OdexDependencies method), 78  
get\_raw() (androguard.core.bytecodes.dvm.OdexHeaderItem method), 78  
get\_raw() (androguard.core.bytecodes.dvm.PackedSwitch method), 79  
get\_raw() (androguard.core.bytecodes.dvm.ParameterAnnotation method), 79  
get\_raw() (androguard.core.bytecodes.dvm.ProtoHIdItem method), 80  
get\_raw() (androguard.core.bytecodes.dvm.ProtoIdItem method), 80  
get\_raw() (androguard.core.bytecodes.dvm.SparseSwitch method), 82  
get\_raw() (androguard.core.bytecodes.dvm.StringDataItem method), 82  
get\_raw() (androguard.core.bytecodes.dvm.StringIdItem method), 83  
get\_raw() (androguard.core.bytecodes.dvm.TryItem method), 83  
get\_raw() (androguard.core.bytecodes.dvm.TypeHIdItem method), 84  
get\_raw() (androguard.core.bytecodes.dvm.TypeIdItem method), 84

get\_raw() (androguard.core.bytecodes.dvm.TypeItem method), 85  
 get\_raw() (androguard.core.bytecodes.dvm.TypeList method), 85  
 get\_raw() (androguard.core.bytecodes.dvm.Unresolved method), 86  
 get\_raw\_string() (androguard.core.bytecodes.dvm.ClassManager method), 39  
 get\_raw\_string() (androguard.core.bytecodes.dvm.ConstString method), 39  
 get\_raw\_string() (androguard.core.bytecodes.dvm.Instruction21c method), 62  
 get\_raw\_string() (androguard.core.bytecodes.dvm.Instruction31c method), 68  
 get\_real\_descriptor() (androguard.core.bytecodes.dvm.MethodIdItem method), 77  
 get\_receivers() (androguard.core.bytecodes.apk(APK method), 29  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction method), 59  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction21t method), 63  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction22t method), 65  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction22cs method), 65  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction31t method), 68  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction35c method), 69  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction35mi method), 70  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction35rc method), 70  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction3rmi method), 71  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction3rmic method), 72  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction40sc method), 72  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction41c method), 73  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction51t method), 74  
 get\_ref\_kind() (androguard.core.bytecodes.dvm.Instruction5rc method), 74  
 get\_ref\_off() (androguard.core.bytecodes.dvm.Instruction10t method), 60  
 get\_ref\_off() (androguard.core.bytecodes.dvm.Instruction20t method), 62  
 get\_ref\_off() (androguard.core.bytecodes.dvm.Instruction21t method), 64  
 get\_ref\_off() (androguard.core.bytecodes.dvm.Instruction22t method), 66  
 get\_ref\_off() (androguard.core.bytecodes.dvm.Instruction30t method), 67  
 get\_ref\_off() (androguard.core.bytecodes.dvm.Instruction31t method), 69  
 get\_regex\_strings() (androguard.core.bytecodes.dvm.DalvikVMFormat method), 46  
 get\_registers\_size() (androguard.core.bytecodes.dvm.DalvikCode method), 42  
 get\_requested\_aosp\_permissions() (androguard.core.bytecodes.apk(APK method), 29  
 get\_requested\_aosp\_permissions\_details() (androguard.core.bytecodes.apk(APK method), 29  
 get\_requested\_permissions (androguard.core.bytecodes.apk(APK attribute), 29  
 get\_requested\_third\_party\_permissions() (androguard.core.bytecodes.apk(APK method), 30  
 get\_res\_configs() (androguard.core.bytecodes.axml.ARSCParser method), 88  
 get\_res\_id\_by\_key() (androguard.core.bytecodes.axml.ARSCParser method), 88  
 get\_resolved\_res\_configs() (androguard.core.bytecodes.axml.ARSCParser method), 88  
 get\_resource\_bool() (androguard.core.bytecodes.axml.ARSCParser method), 88  
 get\_resource\_color() (androguard.core.bytecodes.axml.ARSCParser method), 88  
 get\_resource\_dimen() (androguard.core.bytecodes.axml.ARSCParser method), 88  
 get\_resource\_id() (androguard.core.bytecodes.axml.ARSCParser method), 88  
 get\_resource\_integer() (androguard.core.bytecodes.axml.ARSCParser method), 88

method), 88  
get\_resource\_string() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 88  
get\_resource\_style() (andro-  
guard.core.bytecodes.axml.ARSCParser  
method), 88  
get\_return\_type() (andro-  
guard.core.bytecodes.dvm.ProtoidItemInvalid  
method), 81  
get\_return\_type\_idx() (andro-  
guard.core.bytecodes.dvm.ProtoidItem  
method), 80  
get\_return\_type\_idx\_value() (andro-  
guard.core.bytecodes.dvm.ProtoidItem  
method), 80  
get\_rhs() (androguard.decompiler.dad.instruction.AssignExpression  
method), 104  
get\_rhs() (androguard.decompiler.dad.instruction.FillArrayExpression  
method), 106  
get\_rhs() (androguard.decompiler.dad.instruction.IRForm  
method), 106  
get\_rhs() (androguard.decompiler.dad.instruction.MoveExpression  
method), 108  
get\_sbyte() (in module androguard.core.bytecodes.dvm), 87  
get\_services() (androguard.core.bytecodes.apk.APK  
method), 30  
get\_short\_string() (andro-  
guard.core.bytecodes.dvm.EncodedMethod  
method), 53  
get\_shorty() (androguard.core.bytecodes.dvm.ProtoidItemInvalid  
method), 81  
get\_shorty\_idx() (andro-  
guard.core.bytecodes.dvm.ProtoidItem  
method), 81  
get\_shorty\_idx\_value() (andro-  
guard.core.bytecodes.dvm.ProtoidItem  
method), 81  
get\_signature() (androguard.core.bytecodes.apk.APK  
method), 30  
get\_signature\_name() (andro-  
guard.core.bytecodes.apk.APK  
method), 30  
get\_signature\_names() (andro-  
guard.core.bytecodes.apk.APK  
method), 30  
get\_signatures() (androguard.core.bytecodes.apk.APK  
method), 30  
get\_size() (androguard.core.bytecodes.dvm.DalvikCode  
method), 42  
get\_size() (androguard.core.bytecodes.dvm.EncodedAnnotation  
method), 48  
get\_size() (androguard.core.bytecodes.dvm.EncodedArray  
method), 48  
get\_size() (androguard.core.bytecodes.dvm.EncodedCatchHandler  
method), 49  
get\_size() (androguard.core.bytecodes.dvm.EncodedCatchHandlerList  
method), 50  
get\_size() (androguard.core.bytecodes.dvm.EncodedField  
method), 51  
get\_size() (androguard.core.bytecodes.dvm.EncodedMethod  
method), 54  
get\_size() (androguard.core.bytecodes.dvm.MapItem  
method), 75  
get\_size() (androguard.core.bytecodes.dvm.TypeList  
method), 85  
get\_source() (androguard.core.bytecodes.dvm.ClassDefItem  
method), 37  
get\_source() (androguard.core.bytecodes.dvm.EncodedMethod  
method), 54  
get\_source() (androguard.decompiler.dad.decompile.DvClass  
method), 102  
get\_source() (androguard.decompiler.dad.decompile.DvMethod  
method), 102  
get\_source\_class() (andro-  
guard.decompiler.decompiler.DecompilerDAD  
method), 121  
get\_source\_class() (andro-  
guard.decompiler.decompiler.DecompilerDed  
method), 121  
get\_source\_class() (andro-  
guard.decompiler.decompiler.DecompilerDex2Fernflower  
method), 122  
get\_source\_class() (andro-  
guard.decompiler.decompiler.DecompilerDex2Jad  
method), 122  
get\_source\_class() (andro-  
guard.decompiler.decompiler.DecompilerDex2WineJad  
method), 122  
get\_source\_class() (andro-  
guard.decompiler.decompiler.DecompilerJADX  
method), 123  
get\_source\_class\_ext() (andro-  
guard.decompiler.decompiler.DecompilerDAD  
method), 121  
get\_source\_ext() (andro-  
guard.core.bytecodes.dvm.ClassDefItem  
method), 37  
get\_source\_ext() (andro-  
guard.decompiler.dad.decompile.DvClass  
method), 102  
get\_source\_ext() (andro-  
guard.decompiler.dad.decompile.DvMethod  
method), 102  
get\_source\_file\_idx() (andro-  
guard.core.bytecodes.dvm.ClassDefItem  
method), 37

get_source_method()	(andro-	guard.core.bytecodes.dvm.StringIdItem
guard.decompiler.decompiler.DecompilerDAD method), 121		method), 83
get_source_method()	(andro-	get_string_resources()
guard.decompiler.decompiler.DecompilerDed method), 121		(andro-
get_source_method()	(andro-	guard.core.bytecodes.axml.ARSCParser method), 88
guard.decompiler.decompiler.DecompilerDex2Feng method), 122		get_strings() (andro-
get_source_method()	(andro-	guard.core.analysis.analysis.Analysis method), 16
guard.decompiler.decompiler.DecompilerDex2Jadget method), 122		get_strings() (andro-
get_source_method()	(andro-	guard.decompiler.decompiler.DecompilerDex2Wiget method), 122
guard.decompiler.decompiler.DecompilerJADX		get_strings_resources()
get_source_method()	(andro-	(andro-
guard.decompiler.decompiler.DecompilerJADX		guard.core.bytecodes.axml.ARSCParser method), 88
get_special_ins()	(andro-	get_strings_unicode()
guard.core.analysis.analysis.DVMBasicBlock method), 19		(andro-
get_start() (andro-	guard.core.bytecodes.dvm.DVMBasicBlock method), 19	guard.core.bytecodes.dvm.DalvikVMFormat method), 46
get_start_addr()	(andro-	get_superclass_idx()
guard.core.bytecodes.dvm.TryItem 83		(andro-
get_static_fields()	(andro-	guard.core.bytecodes.dvm.ClassDefItem method), 37
guard.core.bytecodes.dvm.ClassDataItem method), 36		get_superclassname()
get_static_fields_size()	(andro-	(andro-
guard.core.bytecodes.dvm.ClassDataItem method), 36		guard.core.bytecodes.dvm.ClassDefItem method), 37
get_static_values_off()	(andro-	get_target_sdk_version()
guard.core.bytecodes.dvm.ClassDefItem method), 37		(andro-
get_string() (andro-	guard.core.bytecodes.axml.ARSCParser method), 88	guard.core.bytecodes.apk.APK method), 30
get_string() (andro-	guard.core.bytecodes.dvm.ClassManager method), 39	get_targets() (andro-
get_string() (andro-	guard.core.bytecodes.dvm.Instruction21c method), 63	guard.core.bytecodes.dvm.PackedSwitch method), 79
get_string() (andro-	guard.core.bytecodes.dvm.Instruction31c method), 68	get_targets() (andro-
get_string() (andro-	guard.core.bytecodes.dvm.TypeItem method), 85	guard.core.bytecodes.dvm.SparseSwitch method), 82
get_string() (andro-	guard.core.bytecodes.dvm.TypeList method), 85	get_translated_kind()
get_string_by_offset()	(andro-	(andro-
guard.core.bytecodes.dvm.ClassManager method), 39		guard.core.bytecodes.dvm.DebugInfoItem method), 47
get_string_data_item()	(andro-	get_tries()
guard.core.bytecodes.dvm.DalvikVMFormat method), 46		(andro-
get_string_data_off()	(andro-	guard.core.bytecodes.dvm.DalvikCode method), 42
		get_tries_size()
		(andro-
		guard.core.bytecodes.dvm.DalvikCode method), 42
		get_triple()
		(andro-
		guard.core.bytecodes.dvm.EncodedMethod method), 54
		get_triple()
		(andro-
		guard.core.bytecodes.dvm.MethodIdItem method), 77
		get_type()
		(andro-
		guard.core.bytecodes.axml.ARSCResType method), 89
		get_type()
		(andro-
		guard.core.bytecodes.dvm.ClassManager method), 39
		get_type()
		(andro-
		guard.core.bytecodes.dvm.FieldIdItem method), 57
		get_type()
		(andro-
		guard.core.bytecodes.dvm.FieldIdItemInvalid method), 155

method), 57  
get\_type() (androguard.core.bytecodes.dvm.MapItem method), 75  
get\_type() (androguard.core.bytecodes.dvm.TypeHIdItem method), 84  
get\_type() (androguard.decompiler.dad.instruction.ArrayLengthExpression method), 103  
get\_type() (androguard.decompiler.dad.instruction.ArrayLoadExpression method), 104  
get\_type() (androguard.decompiler.dad.instruction.CastExpression method), 105  
get\_type() (androguard.decompiler.dad.instruction.Constant method), 106  
get\_type() (androguard.decompiler.dad.instruction.InstanceExpression method), 104  
get\_type() (androguard.decompiler.dad.instruction.InvokeInstruction method), 107  
get\_type() (androguard.decompiler.dad.instruction.IRForm method), 106  
get\_type() (androguard.decompiler.dad.instruction.NewInstance method), 109  
get\_type() (androguard.decompiler.dad.instruction.StaticExpression method), 110  
get\_type() (androguard.decompiler.dad.instruction.UnaryExpression method), 110  
get\_type() (in module androguard.core.bytecodes.dvm), 87  
get\_type() (in module androguard.decompiler.dad.util), 119  
get\_type\_configs() (androguard.core.bytecodes.axml.ARSCParser method), 88  
get\_type\_idx() (androguard.core.bytecodes.dvm.EncodedAnnotation method), 48  
get\_type\_idx() (androguard.core.bytecodes.dvm.EncodedTypeAddPain method), 106  
get\_type\_idx() (androguard.core.bytecodes.dvm.FieldIdItem method), 54  
get\_type\_idx() (androguard.core.bytecodes.dvm.TypeItem method), 85  
get\_type\_list() (androguard.core.bytecodes.dvm.ClassManager method), 39  
get\_type\_list\_off() (androguard.core.bytecodes.dvm.TypeList method), 85  
get\_type\_ref() (androguard.core.bytecodes.dvm.ClassManager method), 39  
get\_type\_size() (in module androguard.decompiler.dad.util), 119  
get\_types() (androguard.core.bytecodes.axml.ARSCParser method), 88  
get\_unicode() (androguard.core.bytecodes.dvm.StringDataItem method), 82  
get\_used\_vars() (androguard.decompiler.dad.instruction.ArrayLengthExpression method), 103  
get\_used\_vars() (androguard.decompiler.dad.instruction.ArrayLoadExpression method), 104  
get\_used\_vars() (androguard.decompiler.dad.instruction.ArrayStoreInstruction method), 104  
get\_used\_vars() (androguard.decompiler.dad.instruction.AssignExpression method), 104  
get\_used\_vars() (androguard.decompiler.dad.instruction.BinaryExpression method), 104  
get\_used\_vars() (androguard.decompiler.dad.instruction.CastExpression method), 105  
get\_used\_vars() (androguard.decompiler.dad.instruction.CheckCastExpression method), 105  
get\_used\_vars() (androguard.decompiler.dad.instruction.ConditionalExpression method), 105  
get\_used\_vars() (androguard.decompiler.dad.instruction.ConditionalZExpression method), 105  
get\_used\_vars() (androguard.decompiler.dad.instruction.FillArrayExpression method), 106  
get\_used\_vars() (androguard.decompiler.dad.instruction.FilledArrayExpression method), 106  
get\_used\_vars() (androguard.decompiler.dad.instruction.InstanceExpression method), 107  
get\_used\_vars() (androguard.decompiler.dad.instruction.InstanceInstruction method), 107  
get\_used\_vars() (androguard.decompiler.dad.instruction.InvokeInstruction method), 107  
get\_used\_vars() (androguard.decompiler.dad.instruction.InvokeStaticInstruction method), 108  
get\_used\_vars() (androguard.decompiler.dad.instruction.IRForm method), 106  
get\_used\_vars() (androguard.decompiler.dad.instruction.MoveExceptionExpression method), 108  
get\_used\_vars() (androguard.decompiler.dad.instruction.get\_used\_vars() (andro-

```

guard.decompiler.dad.instruction.MoveExpression.get_value_buff()           (androguard.core.bytecode.SVs
method), 108                                                               method), 95

get_used_vars()                                         (andro-  get_value_type()          (andro-
guard.decompiler.dad.instruction.NewArrayExpression      guard.core.bytecodes.dvm.EncodedValue
method), 109                                                               method), 55

get_used_vars()                                         (andro-  get_values()            (andro-
guard.decompiler.dad.instruction.NewInstance        guard.core.bytecodes.dvm.EncodedArray
method), 109                                                               method), 48

get_used_vars()                                         (andro-  get_values()            (andro-
guard.decompiler.dad.instruction.NopExpression       guard.core.bytecodes.dvm.PackedSwitch
method), 109                                                               method), 79

get_used_vars()                                         (andro-  get_values()            (andro-
guard.decompiler.dad.instruction.RefExpression      guard.core.bytecodes.dvm.SparseSwitch
method), 109                                                               method), 82

get_used_vars()                                         (andro-  get_variables()         (in      module      andro-
guard.decompiler.dad.instruction.ReturnInstruction   guard.decompiler.dad.opcode_ins), 114
method), 109                                                               get_virtual_methods()          (andro-
get_used_vars()                                         (andro-  guard.core.bytecodes.dvm.ClassDataItem
guard.decompiler.dad.instruction.StaticInstruction   method), 36
method), 109                                                               get_virtual_methods_size()    (andro-
get_used_vars()                                         (andro-  guard.core.bytecodes.dvm.ClassDataItem
guard.decompiler.dad.instruction.SwitchExpression     method), 36
method), 110                                                               get_visibility()             (andro-
get_used_vars()                                         (andro-  guard.core.bytecodes.dvm.AnnotationItem
guard.decompiler.dad.instruction.UnaryExpression      method), 32

get_used_vars()                                         (andro-  get_vm_class()          (andro-
guard.decompiler.dad.instruction.Variable          guard.core.analysis.analysis.MethodAnalysis
method), 110                                                               method), 20

get_uses_implied_permission_list()          (andro-  get_vmanalysis()         (andro-
guard.core.bytecodes.apk.APK                     method), 18
method), 30                                                               guard.core.analysis.analysis.ClassAnalysis
get_utf16_size()                                         (andro-  get_xref_from()          (andro-
guard.core.bytecodes.dvm.StringDataItem            method), 90
method), 82                                                               guard.core.analysis.analysis.ClassAnalysis
get_value() (androguard.core.analysis.StringAnalysis  method), 18
method), 21                                                               get_xref_from()              (andro-
get_value() (androguard.core.bytecode.SV method), 95
get_value() (androguard.core.bytecode.SVs method), 95
get_value() (androguard.core.bytecodes.axml.ARSCResTable  get_xref_from()          (andro-
method), 89                                                               guard.core.analysis.analysis.StringAnalysis
get_value() (androguard.core.bytecodes.dvm.AnnotationElement  method), 21
method), 32                                                               get_xref_read()             (andro-
get_value() (androguard.core.bytecodes.dvm.DBGBytecode   guard.core.analysis.analysis.FieldClassAnalysis
method), 40                                                               method), 20
get_value() (androguard.core.bytecodes.dvm.EncodedArray  get_xref_to()            (andro-
method), 49                                                               guard.core.analysis.analysis.ClassAnalysis
method), 18
get_value() (androguard.core.bytecodes.dvm.EncodedValue  get_xref_to()            (andro-
method), 55                                                               guard.core.analysis.analysis.MethodClassAnalysis
method), 21
get_value_arg()                                         (andro-  get_xref_write()         (andro-
guard.core.bytecodes.dvm.EncodedValue               guard.core.analysis.analysis.FieldClassAnalysis
method), 55                                                               method), 20
get_value_buff() (androguard.core.bytecode.SV method), 95
getAttributeCount()                                     (andro-
getAttributeCount()                                     guard.core.bytecodes.axml.AXMLParser

```

method), 89  
getAttributeName() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 89  
getAttributeOffset() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 90  
getAttributePrefix() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 90  
getAttributeValue() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 90  
getAttributeValue() (andro-  
guard.core.bytecodes.axml.AXMLPrinter  
method), 90  
getAttributeValueData() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 90  
getAttributeValueType() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 90  
GetMethod() (androguard.core.analysis.analysis.ExternalClass  
method), 19  
getName() (androguard.core.bytecodes.axml.AXMLParser  
method), 90  
getNamespaceCount() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 90  
getNamespacePrefix() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 90  
getNamespaceUri() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 90  
getPackage() (in module andro-  
guard.core.bytecodes.axml), 91  
getPrefix() (androguard.core.bytecodes.axml.AXMLParser  
method), 90  
getPrefix() (androguard.core.bytecodes.axml.AXMLPrinter  
method), 90  
getPrefixByUri() (andro-  
guard.core.bytecodes.axml.AXMLParser  
method), 90  
gets() (androguard.core.analysis.analysis.BasicBlocks  
method), 16  
gets() (androguard.core.analysis.analysis.Exceptions  
method), 19  
gets() (androguard.core.bytecodes.dvm.FieldHIdItem  
method), 56  
getString() (androguard.core.bytecodes.axml.StringBlock  
method), 91  
getStyle() (androguard.core.bytecodes.axml.StringBlock  
method), 91  
getText() (androguard.core.bytecodes.axml.AXMLParser  
method), 90  
getXMLNS() (androguard.core.bytecodes.axml.AXMLParser  
method), 90  
go() (androguard.core.analysis.auto.AndroAuto method),  
22  
goto() (in module andro-  
guard.decompiler.dad.opcode\_ins), 114  
goto16() (in module andro-  
guard.decompiler.dad.opcode\_ins), 114  
goto32() (in module andro-  
guard.decompiler.dad.opcode\_ins), 114  
Graph (class in androguard.decompiler.dad.graph), 102  
GREATER (androguard.decompiler.dad.opcode\_ins.Op  
attribute), 112  
Green (androguard.core.androconf.Color attribute), 93  
Grey (androguard.core.androconf.Color attribute), 93  
group\_variables() (in module andro-  
guard.decompiler.dad.dataflow), 101

## H

has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.ArrayStoreInstruction  
method), 104  
has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.AssignExpression  
method), 104  
has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.BinaryExpression  
method), 104  
has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.InstanceInstruction  
method), 107  
has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.InvokeInstruction  
method), 107  
has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.IRForm  
method), 106  
has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.MoveExceptionExpression  
method), 108  
has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.MoveExpression  
method), 108  
has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.MoveResultExpression  
method), 109  
has\_side\_effect() (andro-  
guard.decompiler.dad.instruction.StaticInstruction  
method), 110  
HeaderItem (class in androguard.core.bytecodes.dvm), 58

identify_structures()	(in module andro-	guard.decompiler.dad.control_flow), 100
idx	(androguard.core.bytecodes.mutf8.PeekIterator attribute), 91	
if_stmt()	(in module androguard.decompiler.dad.ast), 97	
if_struct()	(in module andro-	guard.decompiler.dad.control_flow), 100
ifeq()	(in module andro-	guard.decompiler.dad.opcode_ins), 114
ifeqz()	(in module andro-	guard.decompiler.dad.opcode_ins), 114
ifege()	(in module andro-	guard.decompiler.dad.opcode_ins), 114
ifelez()	(in module andro-	guard.decompiler.dad.opcode_ins), 114
ifgt()	(in module andro-	guard.decompiler.dad.opcode_ins), 114
ifgtz()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
ifle()	(in module androguard.decompiler.dad.opcode_ins),	115
iflez()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
iflt()	(in module androguard.decompiler.dad.opcode_ins),	115
ifltz()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
ifne()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
ifnez()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
iget()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
igetboolean()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
igetbyte()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
igetchar()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
igetobject()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
igetshort()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
igetwide()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
immediate_dominators()	(andro-	guard.decompiler.dad.graph.Graph method), 103
inc_ind()	(androguard.decompiler.dad.writer.Writer method), 119	
init_print_colors()	(in module androguard.misc), 124	
instance	(androguard.core.androconf.Configuration attribute), 93	
InstanceExpression	(class in andro-	guard.decompiler.dad.instruction), 107
InstanceInstruction	(class in andro-	guard.decompiler.dad.instruction), 107
instanceof()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
Instruction	(class in androguard.core.bytecodes.dvm), 58	
Instruction10t	(class in androguard.core.bytecodes.dvm),	59
Instruction10x	(class in androguard.core.bytecodes.dvm),	60
Instruction11n	(class in androguard.core.bytecodes.dvm),	60
Instruction11x	(class in androguard.core.bytecodes.dvm),	61
Instruction12x	(class in androguard.core.bytecodes.dvm),	61
Instruction20bc	(class in andro-	guard.core.bytecodes.dvm), 61
Instruction20t	(class in androguard.core.bytecodes.dvm),	62
Instruction21c	(class in androguard.core.bytecodes.dvm),	62
Instruction21h	(class in androguard.core.bytecodes.dvm),	63
Instruction21s	(class in androguard.core.bytecodes.dvm),	63
Instruction21t	(class in androguard.core.bytecodes.dvm),	64
Instruction22b	(class in androguard.core.bytecodes.dvm),	64
Instruction22c	(class in androguard.core.bytecodes.dvm),	64
Instruction22cs	(class in andro-	guard.core.bytecodes.dvm), 65
Instruction22s	(class in androguard.core.bytecodes.dvm),	65
Instruction22t	(class in androguard.core.bytecodes.dvm),	66
Instruction22x	(class in androguard.core.bytecodes.dvm),	66
Instruction23x	(class in androguard.core.bytecodes.dvm),	67
Instruction30t	(class in androguard.core.bytecodes.dvm),	67
Instruction31c	(class in androguard.core.bytecodes.dvm),	67
Instruction31i	(class in androguard.core.bytecodes.dvm),	68
Instruction31t	(class in androguard.core.bytecodes.dvm),	68
Instruction32x	(class in androguard.core.bytecodes.dvm),	69
Instruction35c	(class in androguard.core.bytecodes.dvm),	

	69		
Instruction35mi	(class in andro-	guard.core.bytecodes.dvm), 70	andro-
Instruction35ms	(class in andro-	guard.core.bytecodes.dvm), 70	andro-
Instruction3rc	(class in androguard.core.bytecodes.dvm),	70	andro-
Instruction3rmi	(class in andro-	guard.core.bytecodes.dvm), 71	andro-
Instruction3rms	(class in andro-	guard.core.bytecodes.dvm), 71	andro-
Instruction40sc	(class in andro-	guard.core.bytecodes.dvm), 72	andro-
Instruction41c	(class in androguard.core.bytecodes.dvm),	72	andro-
Instruction511	(class in androguard.core.bytecodes.dvm),	73	andro-
Instruction52c	(class in androguard.core.bytecodes.dvm),	73	andro-
Instruction5rc	(class in androguard.core.bytecodes.dvm),	74	andro-
InstructionInvalid	(class in andro-	guard.core.bytecodes.dvm), 74	andro-
interpolate_tuple()	(in module andro-	guard.core.androconf), 93	andro-
Interval	(class in androguard.decompiler.dad.node),	111	andro-
intervals()	(in module andro-	guard.decompiler.dad.control_flow), 100	andro-
INTSHL	(androguard.decompiler.dad.opcode_ins.Op at-	tribute), 112	andro-
INTSHR	(androguard.decompiler.dad.opcode_ins.Op at-	tribute), 112	andro-
inttobyte()	(in module andro-	guard.decompiler.dad.opcode_ins), 115	andro-
inttochar()	(in module andro-	guard.decompiler.dad.opcode_ins), 115	andro-
inttoDouble()	(in module andro-	guard.decompiler.dad.opcode_ins), 115	andro-
inttoFloat()	(in module andro-	guard.decompiler.dad.opcode_ins), 115	andro-
inttolong()	(in module andro-	guard.decompiler.dad.opcode_ins), 115	andro-
inttoshort()	(in module andro-	guard.decompiler.dad.opcode_ins), 115	andro-
InvalidInstruction	, 75		
InvalidResourceError	, 93		
invokedirect()	(in module andro-	guard.decompiler.dad.opcode_ins), 115	andro-
InvokeDirectInstruction	(class in andro-	guard.decompiler.dad.instruction), 107	andro-
invokedirectrange()	(in module andro-	guard.decompiler.dad.opcode_ins), 115	andro-
InvokeInstruction	(class in andro-	guard.decompiler.dad.instruction), 107	andro-
	invokeinterface()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
	invokeinterfacerange()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
	InvokeRangeInstruction	(class in andro-	guard.decompiler.dad.instruction), 108
	invokestatic()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
	InvokeStaticInstruction	(class in andro-	guard.decompiler.dad.instruction), 108
	invokestaticrange()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
	invokesuper()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
	invokesuperrange()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
	invokevirtual()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
	invokevirtualrange()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
	iput()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
	iputboolean()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
	iputbyte()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
	iputchar()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
	iputobject()	(in module andro-	guard.decompiler.dad.opcode_ins), 115
	iputshort()	(in module andro-	guard.decompiler.dad.opcode_ins), 116
	iputwide()	(in module andro-	guard.decompiler.dad.opcode_ins), 116
	IRForm	(class in androguard.decompiler.dad.instruction),	106
	is_android()	(in module androguard.core.androconf), 93	
	is_android_api()	(andro-	
		guard.core.analysis.analysis.ClassAnalysis	
		method), 18	
	is_android_api()	(andro-	
		guard.core.analysis.analysis.MethodClassAnalysis	
		method), 21	
	is_android_raw()	(in module androguard.core.androconf),	
		94	
	is_androidtv()	(androguard.core.bytecodes.apk.APK	
		method), 30	
	is_ascii_obfuscation()	(in module andro-	
		guard.core.analysis.analysis), 21	
	is_ascii_problem()	(in module andro-	
		guard.core.androconf), 94	
	is_cached_instructions()	(andro-	
		guard.core.bytecodes.dvm.DCode	
		method),	
		41	

is\_cached\_instructions() (andro-  
     guard.core.bytecodes.dvm.EncodedMethod  
         method), 54  
 is\_call() (androguard.decompiler.dad.instruction.AssignExpression  
     method), 104  
 is\_call() (androguard.decompiler.dad.instruction.InvokeInstruction  
     method), 107  
 is\_call() (androguard.decompiler.dad.instruction.IRForm  
     method), 106  
 is\_call() (androguard.decompiler.dad.instruction.MoveExpression  
     method), 108  
 is\_class\_present() (andro-  
     guard.core.analysis.analysis.Analysis  
         method), 16  
 is\_complex() (androguard.core.bytecodes.axml.ARSCResTableEntry  
     method), 89  
 is\_cond (androguard.decompiler.dad.nodeType at-  
     tribute), 111  
 is\_cond() (androguard.decompiler.dad.instruction.ConditionalExpression  
     method), 105  
 is\_cond() (androguard.decompiler.dad.instruction.ConditionExpression  
     method), 105  
 is\_cond() (androguard.decompiler.dad.instruction.IRForm  
     method), 106  
 is\_const() (androguard.decompiler.dad.instruction.BaseClass  
     method), 104  
 is\_const() (androguard.decompiler.dad.instruction.CastExpression  
     method), 105  
 is\_const() (androguard.decompiler.dad.instruction.CheckCastExpression  
     method), 105  
 is\_const() (androguard.decompiler.dad.instruction.Constant  
     method), 106  
 is\_const() (androguard.decompiler.dad.instruction.IRForm  
     method), 106  
 is\_const() (androguard.decompiler.dad.instruction.Param  
     method), 109  
 is\_endless (androguard.decompiler.dad.nodeType  
     attribute), 111  
 is\_external() (androguard.core.analysis.analysis.ClassAnalysis  
     method), 18  
 is\_external() (androguard.core.analysis.analysis.MethodClassAnalysis  
     method), 21  
 is\_ident() (androguard.decompiler.dad.instruction.IRForm  
     method), 106  
 is\_ident() (androguard.decompiler.dad.instruction.Variable  
     method), 111  
 is\_leanback() (androguard.core.bytecodes.apk(APK  
     method), 30  
 is\_multidex() (androguard.core.bytecodes.apk(APK  
     method), 30  
 is\_packed() (androguard.core.bytecodes.axml.XMLPrinter  
     method), 90  
 is\_posttest (androguard.decompiler.dad.nodeType  
     attribute), 111

is\_pretest (androguard.decompiler.dad.nodeType  
     attribute), 111  
 is\_propagable() (andro-  
     guard.decompiler.dad.instruction.AssignExpression  
         method), 104  
 is\_propagable() (andro-  
     guard.decompiler.dad.instruction.FillArrayExpression  
         method), 106  
 is\_propagable() (andro-  
     guard.decompiler.dad.instruction.IRForm  
         method), 106  
 is\_propagable() (andro-  
     guard.decompiler.dad.instruction.MoveResultExpression  
         method), 109  
 is\_propagable() (andro-  
     guard.decompiler.dad.instruction.NewArrayExpression  
         method), 109  
 is\_propagable() (andro-  
     guard.decompiler.dad.instruction.RefExpression  
         method), 109  
 is\_propagable() (andro-  
     guard.core.bytecodes.axml.ARSCResTableEntry  
         method), 89  
 is\_reference() (androguard.core.bytecodes.axml.ARSCResStringPoolRef  
     method), 89  
 is\_return (androguard.decompiler.dad.nodeType at-  
     tribute), 111  
 is\_signed() (androguard.core.bytecodes.apk(APK  
     method), 30  
 is\_signed() (androguard.core.bytecodes.apk(APK  
     method), 30  
 is\_signed\_v2() (androguard.core.bytecodes.apk(APK  
     method), 30  
 is\_stmt (androguard.decompiler.dad.nodeType at-  
     tribute), 111  
 is\_switch (androguard.decompiler.dad.nodeType  
     attribute), 111  
 is\_throw (androguard.decompiler.dad.nodeType  
     attribute), 111  
 is\_valid() (androguard.core.bytecodes.axml.XMLParser  
     method), 90  
 is\_valid(APK) (androguard.core.bytecodes.apk(APK  
     method), 31  
 is\_weak() (androguard.core.bytecodes.axml.ARSCResTableEntry  
     method), 89  
 is\_wearable() (androguard.core.bytecodes.apk(APK  
     method), 31  
 isOpen() (androguard.session.Session  
     method), 126

**J**

JADXDecompilerError, 123  
 JSONWriter (class in androguard.decompiler.dad.ast), 97  
 jump\_stmt() (in module androguard.decompiler.dad.ast), 97

**L**

last() (androguard.decompiler.dad.graph.GenInvokeRetName method), 102  
LEQUAL (androguard.decompiler.dad.opcode\_ins.Op attribute), 112  
LinearSweepAlgorithm (class in androguard.core.bytecodes.dvm), 75  
list\_classes\_hierarchy() (androguard.core.bytecodes.dvm.DalvikVMFormat method), 47  
literal() (in module androguard.decompiler.dad.ast), 97  
literal\_bool() (in module androguard.decompiler.dad.ast), 97  
literal\_class() (in module androguard.decompiler.dad.ast), 98  
literal\_double() (in module androguard.decompiler.dad.ast), 98  
literal\_float() (in module androguard.decompiler.dad.ast), 98  
literal\_hex\_int() (in module androguard.decompiler.dad.ast), 98  
literal\_int() (in module androguard.decompiler.dad.ast), 98  
literal\_long() (in module androguard.decompiler.dad.ast), 98  
literal\_null() (in module androguard.decompiler.dad.ast), 98  
literal\_string() (in module androguard.decompiler.dad.ast), 98  
load() (androguard.core.bytecodes.dvm.EncodedField method), 51  
load() (androguard.core.bytecodes.dvm.EncodedMethod method), 54  
Load() (in module androguard.session), 125  
load\_api\_specific\_resource\_module() (in module androguard.core.androconf), 94  
load\_array\_exp() (in module androguard.decompiler.dad.opcode\_ins), 116  
load\_permission\_mappings() (in module androguard.core.api\_specific\_resources), 25  
load\_permissions() (in module androguard.core.api\_specific\_resources), 25  
local() (in module androguard.decompiler.dad.ast), 98  
local\_decl\_stmt() (in module androguard.decompiler.dad.ast), 98  
long2int() (in module androguard.core.bytecodes.axml), 91  
LONGSHL (androguard.decompiler.dad.opcode\_ins.Op attribute), 112  
LONGSHR (androguard.decompiler.dad.opcode\_ins.Op attribute), 112  
longtodouble() (in module androguard.decompiler.dad.opcode\_ins), 116  
longtofloat() (in module androguard.decompiler.dad.opcode\_ins), 116  
longtoint() (in module androguard.decompiler.dad.opcode\_ins), 116  
loop\_follow() (in module androguard.decompiler.dad.control\_flow), 100  
loop\_stmt() (in module androguard.decompiler.dad.ast), 98  
loop\_struct() (in module androguard.decompiler.dad.control\_flow), 100  
loop\_type() (in module androguard.decompiler.dad.control\_flow), 100  
LoopBlock (class in androguard.decompiler.dad.basic\_blocks), 99  
LoopType (class in androguard.decompiler.dad.node), 111  
LOWER (androguard.decompiler.dad.opcode\_ins.Op attribute), 112

**M**

main() (in module androguard.decompiler.dad.decompile), 102  
make\_color\_tuple() (in module androguard.core.androconf), 94  
make\_node() (in module androguard.decompiler.dad.graph), 103  
MakeProperties (class in androguard.decompiler.dad.node), 111  
MapItem (class in androguard.core.bytecodes.dvm), 75  
MapList (class in androguard.core.bytecodes.dvm), 75  
mark\_loop() (in module androguard.decompiler.dad.control\_flow), 100  
mark\_loop\_rec() (in module androguard.decompiler.dad.control\_flow), 100  
merge\_inner() (in module androguard.decompiler.dad.util), 119  
method2dot() (in module androguard.core.bytecode), 95  
method2format() (in module androguard.core.bytecode), 96  
method2jpg() (in module androguard.core.bytecode), 96  
method2json() (in module androguard.core.bytecode), 96  
method2json\_direct() (in module androguard.core.bytecode), 96  
method2json\_undirect() (in module androguard.core.bytecode), 96  
method2png() (in module androguard.core.bytecode), 96  
method\_idx\_diff (androguard.core.bytecodes.dvm.EncodedMethod attribute), 54  
method\_invocation() (in module androguard.decompiler.dad.ast), 98  
MethodAnalysis (class in androguard.core.analysis.analysis), 20  
MethodAnnotation (class in androguard.core.bytecodes.dvm), 76

MethodBC (class in androguard.core.bytecode), 95		tribute), 112
MethodClassAnalysis (class in androguard.core.analysis.analysis), 20	andro-	muldouble() (in module androguard.decompiler.dad.opcode_ins), 116
MethodFilter (class in androguard.decompiler.decompiler), 123	andro-	muldouble2addr() (in module androguard.decompiler.dad.opcode_ins), 116
MethodHIdItem (class in androguard.core.bytecodes.dvm), 76	andro-	mulfloat() (in module androguard.decompiler.dad.opcode_ins), 116
MethodIdItem (class in androguard.core.bytecodes.dvm), 77	andro-	mulfloat2addr() (in module androguard.decompiler.dad.opcode_ins), 116
MethodIdItemInvalid (class in androguard.core.bytecodes.dvm), 77	andro-	mulint() (in module androguard.decompiler.dad.opcode_ins), 116
MOD (androguard.decompiler.dad.opcode_ins.Op attribute), 112	andro-	mulint2addr() (in module androguard.decompiler.dad.opcode_ins), 116
monitorenter() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	mulintlit16() (in module androguard.decompiler.dad.opcode_ins), 116
MonitorEnterExpression (class in androguard.decompiler.dad.instruction), 108	andro-	mulintlit8() (in module androguard.decompiler.dad.opcode_ins), 116
monitorexit() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	mullong() (in module androguard.decompiler.dad.opcode_ins), 116
MonitorExitExpression (class in androguard.decompiler.dad.instruction), 108	andro-	mullong2addr() (in module androguard.decompiler.dad.opcode_ins), 116
move() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	
move16() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	NEG (androguard.decompiler.dad.opcode_ins.Op attribute), 112
moveexception() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	neg() (androguard.decompiler.dad.basic_blocks.CondBlock method), 99
MoveExceptionExpression (class in androguard.decompiler.dad.instruction), 108	andro-	neg() (androguard.decompiler.dad.basic_blocks.Condition method), 99
MoveExpression (class in androguard.decompiler.dad.instruction), 108	andro-	neg() (androguard.decompiler.dad.basic_blocks.LoopBlock method), 99
movefrom16() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	neg() (androguard.decompiler.dad.basic_blocks.ShortCircuitBlock method), 99
moveobject() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	neg() (androguard.decompiler.dad.instruction.ConditionalExpression method), 105
moveobject16() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	neg() (androguard.decompiler.dad.instruction.ConditionalZExpression method), 105
moveobjectfrom16() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	negdouble() (in module androguard.decompiler.dad.opcode_ins), 116
moveresult() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	negfloat() (in module androguard.decompiler.dad.opcode_ins), 116
MoveResultExpression (class in androguard.decompiler.dad.instruction), 109	andro-	negint() (in module androguard.decompiler.dad.opcode_ins), 116
moveresultobject() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	neglong() (in module androguard.decompiler.dad.opcode_ins), 116
moveresultwide() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	NEQUAL (androguard.decompiler.dad.opcode_ins.Op attribute), 112
movewide() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	new() (androguard.decompiler.dad.graph.GenInvokeRetName method), 102
movewide16() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	new_id() (androguard.core.data.DexViewer method), 92
movewidefrom16() (in module androguard.decompiler.dad.opcode_ins), 116	andro-	new_zip() (androguard.core.bytecodes.apk(APK method), 31
MUL (androguard.decompiler.dad.opcode_ins.Op at-		

## N

andro-	neg() (androguard.decompiler.dad.basic_blocks.CondBlock method), 99
andro-	neg() (androguard.decompiler.dad.basic_blocks.Condition method), 99
andro-	neg() (androguard.decompiler.dad.basic_blocks.LoopBlock method), 99
andro-	neg() (androguard.decompiler.dad.basic_blocks.ShortCircuitBlock method), 99
andro-	neg() (androguard.decompiler.dad.instruction.ConditionalExpression method), 105
andro-	neg() (androguard.decompiler.dad.instruction.ConditionalZExpression method), 105
andro-	negdouble() (in module androguard.decompiler.dad.opcode_ins), 116
andro-	negfloat() (in module androguard.decompiler.dad.opcode_ins), 116
andro-	negint() (in module androguard.decompiler.dad.opcode_ins), 116
andro-	neglong() (in module androguard.decompiler.dad.opcode_ins), 116
andro-	NEQUAL (androguard.decompiler.dad.opcode_ins.Op attribute), 112
andro-	new() (androguard.decompiler.dad.graph.GenInvokeRetName method), 102
andro-	new_id() (androguard.core.data.DexViewer method), 92
andro-	new_zip() (androguard.core.bytecodes.apk(APK method), 31

newarray() (in module androguard.decompiler.dad.opcode\_ins), 117  
NewArrayExpression (class in androguard.decompiler.dad.instruction), 109  
newInstance (class in androguard.decompiler.dad.instruction), 109  
newinstance() (in module androguard.decompiler.dad.opcode\_ins), 117  
next() (androguard.core.bytecodes.mutf8.PeekIterator method), 91  
Node (class in androguard.core.bytecode), 95  
Node (class in androguard.decompiler.dad.node), 111  
NodeType (class in androguard.decompiler.dad.node), 111  
nop() (in module androguard.decompiler.dad.opcode\_ins), 117  
NopExpression (class in androguard.decompiler.dad.instruction), 109  
Normal (androguard.core.androconf.Color attribute), 93  
NOT (androguard.decompiler.dad.opcode\_ins.Op attribute), 112  
notint() (in module androguard.decompiler.dad.opcode\_ins), 117  
notlong() (in module androguard.decompiler.dad.opcode\_ins), 117  
num (androguard.decompiler.dad.basic\_blocks.TryBlock attribute), 100  
number\_ins() (androguard.decompiler.dad.basic\_blocks.BasicBlock method), 99  
number\_ins() (androguard.decompiler.dad.graph.Graph method), 103

## O

object\_to\_bytes() (in module androguard.core.bytecode), 96  
OdexDependencies (class in androguard.core.bytecodes.dvm), 78  
OdexHeaderItem (class in androguard.core.bytecodes.dvm), 78  
off\_to\_pos() (androguard.core.bytecodes.dvm.DCode method), 41  
OffObj (class in androguard.core.bytecodes.dvm), 78  
Op (class in androguard.decompiler.dad.opcode\_ins), 112  
OR (androguard.decompiler.dad.opcode\_ins.Op attribute), 112  
order\_cases() (androguard.decompiler.dad.basic\_blocks.SwitchBlock method), 100  
orint() (in module androguard.decompiler.dad.opcode\_ins), 117  
orint2addr() (in module androguard.decompiler.dad.opcode\_ins), 117  
orintlit16() (in module androguard.decompiler.dad.opcode\_ins), 117

orintlit8() (in module androguard.decompiler.dad.opcode\_ins), 117  
orlong() (in module androguard.decompiler.dad.opcode\_ins), 117  
orlong2addr() (in module androguard.decompiler.dad.opcode\_ins), 117

## P

PackageName (class in androguard.core.bytecodes.axml), 90  
PackedSwitch (class in androguard.core.bytecodes.dvm), 78  
packedswitch() (in module androguard.decompiler.dad.opcode\_ins), 117  
Param (class in androguard.decompiler.dad.instruction), 109  
ParameterAnnotation (class in androguard.core.bytecodes.dvm), 79  
parenthesis() (in module androguard.decompiler.dad.ast), 98  
parse() (androguard.core.bytecodes.dvm.MapItem method), 75  
parse\_descriptor() (in module androguard.decompiler.dad.ast), 98  
parse\_lxml\_dom() (in module androguard.core.bytecodes.apk), 31  
patch\_string() (in module androguard.core.bytecodes.mutf8), 92  
BasicBlock peek() (androguard.core.bytecodes.mutf8.PeekIterator method), 91  
PeekIterator (class in androguard.core.bytecodes.mutf8), 91  
place\_declarations() (in module androguard.decompiler.dad.dataflow), 101  
pop() (androguard.core.analysis.analysis.BasicBlocks method), 16  
post\_order() (androguard.decompiler.dad.graph.Graph method), 103  
preds() (androguard.decompiler.dad.graph.Graph method), 103  
PrettyShow() (in module androguard.core.bytecode), 95  
PrettyShowEx() (in module androguard.core.bytecode), 95  
print\_classes\_hierarchy() (androguard.core.bytecodes.dvm.DalvikVMFormat method), 47  
process() (androguard.decompiler.dad.decompile.DvClass method), 102  
process() (androguard.decompiler.dad.decompile.DvMachine method), 102  
process() (androguard.decompiler.dad.decompile.DvMethod method), 102  
process\_and\_show() (androguard.decompiler.dad.decompile.DvMachine

method), 102  
 process\_method() (andro-  
     guard.decompiler.dad.decompile.DvClass  
         method), 102  
 ProtoHIdItem (class in androguard.core.bytecodes.dvm), 80  
 ProtoIdItem (class in androguard.core.bytecodes.dvm), 80  
 ProtoIdItemInvalid (class in andro-  
     guard.core.bytecodes.dvm), 81  
 Purple (androguard.core.androconf.Color attribute), 93  
 push() (androguard.core.analysis.analysis.BasicBlocks  
     method), 16  
 push() (androguard.core.analysis.analysis.DVMBasicBlock  
     method), 19  
 put\_ate\_value() (andro-  
     guard.core.bytecodes.axml.ARSCParser.ResourceResolver  
         method), 87  
 put\_item\_value() (andro-  
     guard.core.bytecodes.axml.ARSCParser.ResourceResolver  
         method), 87

**R**

reach\_def\_analysis() (in module andro-  
     guard.decompiler.dad.dataflow), 101  
 read() (androguard.core bytecode.BuffHandle  
     method), 94  
 read() (in module androguard.util), 126  
 read\_at() (androguard.core bytecode.BuffHandle  
     method), 94  
 read\_b() (androguard.core bytecode.BuffHandle  
     method), 95  
 read\_null\_terminated\_string() (in module andro-  
     guard.core.bytecodes.dvm), 87  
 readNullString() (androguard.core bytecode.BuffHandle  
     method), 94  
 readsleb128() (in module andro-  
     guard.core.bytecodes.dvm), 87  
 readuleb128() (in module andro-  
     guard.core.bytecodes.dvm), 87  
 readuleb128p1() (in module andro-  
     guard.core.bytecodes.dvm), 87  
 readusleb128() (in module andro-  
     guard.core.bytecodes.dvm), 87  
 Red (androguard.core.androconf.Color attribute), 93  
 RefExpression (class in andro-  
     guard.decompiler.dad.instruction), 109  
 register\_propagation() (in module andro-  
     guard.decompiler.dad.dataflow), 101  
 reload() (androguard.core.bytecodes.dvm.AnnotationItem  
     method), 32  
 reload() (androguard.core.bytecodes.dvm.AnnotationsDirectoryItem  
     method), 35

reload() (androguard.core.bytecodes.dvm.AnnotationSetItem  
     method), 33  
 reload() (androguard.core.bytecodes.dvm.AnnotationSetRefList  
     method), 34  
 reload() (androguard.core.bytecodes.dvm.ClassDataItem  
     method), 36  
 reload() (androguard.core.bytecodes.dvm.ClassDefItem  
     method), 37  
 reload() (androguard.core.bytecodes.dvm.ClassHDefItem  
     method), 38  
 reload() (androguard.core.bytecodes.dvm.CodeItem  
     method), 39  
 reload() (androguard.core.bytecodes.dvm.DalvikCode  
     method), 42  
 reload() (androguard.core.bytecodes.dvm.DCode  
     method), 41  
 Result(androguard.core.bytecodes.dvm.DebugInfoItem  
     method), 47  
 reload() (androguard.core.bytecodes.dvm.DebugInfoItemEmpty  
     method), 47  
 reload() (androguard.core.bytecodes.dvm.EncodedArrayItem  
     method), 49  
 reload() (androguard.core.bytecodes.dvm.EncodedField  
     method), 51  
 reload() (androguard.core.bytecodes.dvm.EncodedMethod  
     method), 54  
 reload() (androguard.core.bytecodes.dvm.FieldHIdItem  
     method), 56  
 reload() (androguard.core.bytecodes.dvm.FieldIdItem  
     method), 57  
 reload() (androguard.core.bytecodes.dvm.HeaderItem  
     method), 58  
 reload() (androguard.core.bytecodes.dvm.MapItem  
     method), 75  
 reload() (androguard.core.bytecodes.dvm.MapList  
     method), 76  
 reload() (androguard.core.bytecodes.dvm.MethodHIdItem  
     method), 76  
 reload() (androguard.core.bytecodes.dvm.MethodIdItem  
     method), 77  
 reload() (androguard.core.bytecodes.dvm.ProtoHIdItem  
     method), 80  
 reload() (androguard.core.bytecodes.dvm.ProtoIdItem  
     method), 81  
 reload() (androguard.core.bytecodes.dvm.StringDataItem  
     method), 82  
 reload() (androguard.core.bytecodes.dvm.StringIdItem  
     method), 83  
 reload() (androguard.core.bytecodes.dvm.TypeHIdItem  
     method), 84  
 reload() (androguard.core.bytecodes.dvm.TypeIdItem  
     method), 84  
 reload() (androguard.core.bytecodes.dvm.TypeList  
     method), 85

remdouble() (in module andro- replace() (androguard.decompiler.dad.instruction.InstanceExpression  
guard.decompiler.dad.opcode\_ins), 117 method), 107  
remdouble2addr() (in module andro- replace() (androguard.decompiler.dad.instruction.InstanceInstruction  
guard.decompiler.dad.opcode\_ins), 117 method), 107  
remfloat() (in module andro- replace() (androguard.decompiler.dad.instruction.InvokeInstruction  
guard.decompiler.dad.opcode\_ins), 117 method), 107  
remfloat2addr() (in module andro- replace() (androguard.decompiler.dad.instruction.IRForm  
guard.decompiler.dad.opcode\_ins), 117 method), 107  
remint() (in module andro- replace() (androguard.decompiler.dad.instruction.MoveExpression  
guard.decompiler.dad.opcode\_ins), 117 method), 108  
remint2addr() (in module andro- replace() (androguard.decompiler.dad.instruction.NewArrayExpression  
guard.decompiler.dad.opcode\_ins), 117 method), 109  
remint16() (in module andro- replace() (androguard.decompiler.dad.instruction.NewInstance  
guard.decompiler.dad.opcode\_ins), 117 method), 109  
remintlit8() (in module andro- replace() (androguard.decompiler.dad.instruction.RefExpression  
guard.decompiler.dad.opcode\_ins), 117 method), 109  
remlong() (in module andro- replace() (androguard.decompiler.dad.instruction.ReturnInstruction  
guard.decompiler.dad.opcode\_ins), 117 method), 109  
remlong2addr() (in module andro- replace() (androguard.decompiler.dad.instruction.StaticExpression  
guard.decompiler.dad.opcode\_ins), 117 method), 110  
remove\_colors() (in module androguard.core.androconf), replace() (androguard.decompiler.dad.instruction.StaticInstruction  
94 method), 110  
remove\_defined\_var() (andro- replace() (androguard.decompiler.dad.instruction.SwitchExpression  
guard.decompiler.dad.instruction.AssignExpression method), 110  
method), 104 replace() (androguard.decompiler.dad.instruction.UnaryExpression  
method), 104  
remove\_defined\_var() (andro- replace\_lhs() (androguard.decompiler.dad.instruction.AssignExpression  
guard.decompiler.dad.instruction.IRForm method), 104  
method), 107  
remove\_ins() (androguard.decompiler.dad.basic\_blocks.BasicBlock lhs() (androguard.decompiler.dad.instruction.IRForm  
method), 99 method), 107  
remove\_ins() (androguard.decompiler.dad.graph.Graph replace\_lhs() (androguard.decompiler.dad.instruction.MoveExceptionExpres-  
method), 103 sion) (androguard.decompiler.dad.instruction.ArrayLengthExpression  
method), 103  
remove\_node() (androguard.decompiler.dad.graph.Graph replace\_lhs() (androguard.decompiler.dad.instruction.MoveExpression  
method), 103 method), 108  
replace() (androguard.decompiler.dad.instruction.ArrayLengthExpression) (androguard.decompiler.dad.instruction.ArrayLengthExpression  
method), 103  
replace() (androguard.decompiler.dad.instruction.ArrayLoadExpression) (androguard.decompiler.dad.instruction.ArrayLoadExpression  
method), 104  
replace() (androguard.decompiler.dad.instruction.ArrayStoreInstruction) (androguard.decompiler.dad.instruction.ArrayStoreInstruction  
method), 104  
replace() (androguard.decompiler.dad.instruction.AssignExpression\_var) (androguard.decompiler.dad.instruction.AssignExpression  
method), 104  
replace() (androguard.decompiler.dad.instruction.BinaryExpression\_var) (androguard.decompiler.dad.instruction.BinaryExpression  
method), 105  
replace() (androguard.decompiler.dad.instruction.CheckCastExpression) (androguard.decompiler.dad.instruction.CheckCastExpression  
method), 105  
replace() (androguard.decompiler.dad.instruction.ConditionalExpression) (androguard.decompiler.dad.instruction.ConditionalExpression  
method), 105  
replace() (androguard.decompiler.dad.instruction.ConditionalZExpression) (androguard.decompiler.dad.instruction.ConditionalZExpression  
method), 106  
replace() (androguard.decompiler.dad.instruction.FillArrayExpression) (androguard.decompiler.dad.instruction.FillArrayExpression  
method), 106  
replace() (androguard.decompiler.dad.instruction.FilledArrayExpression) (androguard.decompiler.dad.instruction.FilledArrayExpression  
method), 106

S

set\_item() (androguard.core.bytecodes.dvm.MapItem method), 75  
set\_mResId() (androguard.core.bytecodes.axml.PackageContext method), 91  
set\_name() (androguard.core.bytecodes.dvm.ClassDefItem method), 38  
set\_name() (androguard.core.bytecodes.dvm.EncodedField method), 51  
set\_name() (androguard.core.bytecodes.dvm.EncodedMethod method), 54  
set\_notes() (androguard.core.analysis.analysis.DVMBasicBlock method), 19  
set\_off() (androguard.core.bytecodes.dvm.AnnotationItem method), 32  
set\_off() (androguard.core.bytecodes.dvm.AnnotationsDirectory method), 35  
set\_off() (androguard.core.bytecodes.dvm.AnnotationSetItem method), 33  
set\_off() (androguard.core.bytecodes.dvm.AnnotationSetRefItem method), 34  
set\_off() (androguard.core.bytecodes.dvm.ClassDataItem method), 36  
set\_off() (androguard.core.bytecodes.dvm.ClassHDefItem method), 38  
set\_off() (androguard.core.bytecodes.dvm.CodeItem method), 39  
set\_off() (androguard.core.bytecodes.dvm.DalvikCode method), 42  
set\_off() (androguard.core.bytecodes.dvm.DebugInfoItemEmpty method), 47  
set\_off() (androguard.core.bytecodes.dvm.EncodedArrayItem method), 49  
set\_off() (androguard.core.bytecodes.dvm.EncodedCatchHandler method), 49  
set\_off() (androguard.core.bytecodes.dvm.EncodedCatchHandlerList method), 50  
set\_off() (androguard.core.bytecodes.dvm.FieldAnnotation method), 56  
set\_off() (androguard.core.bytecodes.dvm.FieldHIdItem method), 56  
set\_off() (androguard.core.bytecodes.dvm.HeaderItem method), 58  
set\_off() (androguard.core.bytecodes.dvm.MapList method), 76  
set\_off() (androguard.core.bytecodes.dvm.MethodAnnotation method), 76  
set\_off() (androguard.core.bytecodes.dvm.MethodHIdItem method), 76  
set\_off() (androguard.core.bytecodes.dvm.ParameterAnnotation method), 80  
set\_off() (androguard.core.bytecodes.dvm.ProtoHIdItem method), 80  
set\_off() (androguard.core.bytecodes.dvm.StringDataItem method), 83  
set\_off() (androguard.core.bytecodes.dvm.StringIdItem method), 83  
set\_off() (androguard.core.bytecodes.dvm.TryItem method), 83  
(androguard.core.bytecodes.dvm.TypeHIdItem method), 84  
(androguard.core.bytecodes.dvm.TypeList method), 85  
set\_options() (in module androguard.core.androconf), 94  
set\_static\_fields() (androguard.core.bytecodes.dvm.ClassDataItem method), 36  
set\_to() (androguard.decompiler.dad.graph.GenInvokeRetName method), 102  
set\_type() (androguard.decompiler.dad.instruction.IRForm method), 107  
set\_value() (androguard.core.analysis.analysis.StringAnalysis method), 21  
set\_value() (androguard.core.bytecode.SV method), 95  
set\_value() (androguard.core.bytecode.SVs method), 95  
set\_vmanalysis() (androguard.core.bytecodes.dvm.DalvikVMFormat method), 47  
sget() (in module androguard.decompiler.dad.opcode\_ins), 117  
sgetboolean() (in module androguard.decompiler.dad.opcode\_ins), 117  
sgetbyte() (in module androguard.decompiler.dad.opcode\_ins), 117  
sgetchar() (in module androguard.decompiler.dad.opcode\_ins), 117  
sgetobject() (in module androguard.decompiler.dad.opcode\_ins), 117  
sgetshort() (in module androguard.decompiler.dad.opcode\_ins), 117  
sgetwide() (in module androguard.decompiler.dad.opcode\_ins), 117  
shlint() (in module androguard.decompiler.dad.opcode\_ins), 117  
shlint2addr() (in module androguard.decompiler.dad.opcode\_ins), 117  
shlintlit8() (in module androguard.decompiler.dad.opcode\_ins), 118  
shllong() (in module androguard.decompiler.dad.opcode\_ins), 118  
shllong2addr() (in module androguard.decompiler.dad.opcode\_ins), 118  
short\_circuit\_struct() (in module androguard.decompiler.dad.control\_flow), 100  
ShortCircuitBlock (class in androguard.decompiler.dad.basic\_blocks), 99  
show() (androguard.core.analysis.analysis.DVMBasicBlock method), 19  
show() (androguard.core.analysis.analysis.MethodAnalysis

method), 20  
 show() (androguard.core.bytecode.MethodBC method), 95  
 show() (androguard.core.bytecodes.apk(APK method), 31  
 show() (androguard.core.bytecodes.axml.StringBlock method), 91  
 show() (androguard.core.bytecodes.dvm.AnnotationElements show() method), 32  
 show() (androguard.core.bytecodes.dvm.AnnotationItem method), 32  
 show() (androguard.core.bytecodes.dvm.AnnotationOffItem show() method), 33  
 show() (androguard.core.bytecodes.dvm.AnnotationsDirectory method), 35  
 show() (androguard.core.bytecodes.dvm.AnnotationSetItem show() method), 33  
 show() (androguard.core.bytecodes.dvm.AnnotationSetRefItshow() method), 33  
 show() (androguard.core.bytecodes.dvm.AnnotationSetRefList show() method), 34  
 show() (androguard.core.bytecodes.dvm.ClassDataItem method), 36  
 show() (androguard.core.bytecodes.dvm.ClassDefItem method), 38  
 show() (androguard.core.bytecodes.dvm.ClassHDefItem method), 38  
 show() (androguard.core.bytecodes.dvm.CodeItem method), 39  
 show() (androguard.core.bytecodes.dvm.DalvikCode method), 42  
 show() (androguard.core.bytecodes.dvm.DalvikVMFormat method), 47  
 show() (androguard.core.bytecodes.dvm.DBGBytecode method), 40  
 show() (androguard.core.bytecodes.dvm.DCode method), 41  
 show() (androguard.core.bytecodes.dvm.DebugInfoItem method), 47  
 show() (androguard.core.bytecodes.dvm.DebugInfoItemEmplshow() method), 47  
 show() (androguard.core.bytecodes.dvm.EncodedAnnotations show() method), 48  
 show() (androguard.core.bytecodes.dvm.EncodedArray method), 48  
 show() (androguard.core.bytecodes.dvm.EncodedArrayList show() method), 49  
 show() (androguard.core.bytecodes.dvm.EncodedCatchHandler show() method), 49  
 show() (androguard.core.bytecodes.dvm.EncodedCatchHandlerList show() method), 50  
 show() (androguard.core.bytecodes.dvm.EncodedField method), 51  
 show() (androguard.core.bytecodes.dvm.EncodedMethod method), 54  
 show() (androguard.core.bytecodes.dvm.EncodedTypeAddrPair method), 55  
 show() (androguard.core.bytecodes.dvm.EncodedValue method), 55  
 show() (androguard.core.bytecodes.dvm.FieldAnnotation method), 56  
 show() (androguard.core.bytecodes.dvm.FieldHIdItem method), 56  
 show() (androguard.core.bytecodes.dvm.FieldIdItem method), 57  
 show() (androguard.core.bytecodes.dvm.FieldIdItemInvalid method), 57  
 (androguard.core.bytecodes.dvm.FillArrayData method), 58  
 (androguard.core.bytecodes.dvm.HeaderItem method), 58  
 (androguard.core.bytecodes.dvm.Instruction method), 59  
 (androguard.core.bytecodes.dvm.MapItem method), 75  
 (androguard.core.bytecodes.dvm.MapList method), 76  
 show() (androguard.core.bytecodes.dvm.MethodAnnotation method), 76  
 show() (androguard.core.bytecodes.dvm.MethodHIdItem method), 76  
 show() (androguard.core.bytecodes.dvm.MethodIdItem method), 77  
 show() (androguard.core.bytecodes.dvm.MethodIdItemInvalid method), 78  
 show() (androguard.core.bytecodes.dvm.OdexHeaderItem method), 78  
 show() (androguard.core.bytecodes.dvm.PackedSwitch method), 79  
 show() (androguard.core.bytecodes.dvm.ParameterAnnotation method), 80  
 (androguard.core.bytecodes.dvm.ProtoHIdItem method), 80  
 (androguard.core.bytecodes.dvm.ProtoIdItem method), 81  
 show() (androguard.core.bytecodes.dvm.ProtoIdItemInvalid method), 81  
 show() (androguard.core.bytecodes.dvm.SparseSwitch method), 82  
 (androguard.core.bytecodes.dvm.StringDataItem method), 83  
 (androguard.core.bytecodes.dvm.StringIdItem method), 83  
 (androguard.core.bytecodes.dvm.TypeHIdItem method), 84  
 (androguard.core.bytecodes.dvm.TypeIdItem method), 84  
 (androguard.core.bytecodes.dvm.TypeItem method), 85

show() (androguard.core.bytecodes.dvm.TypeList method), 86  
show\_buff() (androguard.core.analysis.analysis.ExceptionAnalysis method), 19  
show\_buff() (androguard.core.bytecodes.dvm.FillArrayDatasput() method), 58  
show\_buff() (androguard.core.bytecodes.dvm.Instruction method), 59  
show\_buff() (androguard.core.bytecodes.dvm.PackedSwitch) sputboolean() (in module androguard.decompiler.dad.opcode\_ins), 118  
show\_buff() (androguard.core.bytecodes.dvm.SparseSwitch) sputchar() (in module androguard.decompiler.dad.opcode\_ins), 118  
show\_buff() (androguard.core.bytecodes.dvm.Switch) sputbyte() (in module androguard.decompiler.dad.opcode\_ins), 118  
show\_buff() (androguard.core.bytecodes.dvm.Switch) sputshort() (in module androguard.decompiler.dad.opcode\_ins), 118  
show\_logging() (in module androguard.core.androconf), 94  
show\_notes() (androguard.core.bytecodes.dvm.EncodedMethod method), 54  
show\_source() (androguard.decompiler.dad.decompile.DvClassStatementBlock method), 102  
show\_source() (androguard.decompiler.dad.decompile.DvMethodStatementBlock method), 102  
show\_source() (androguard.decompiler.dad.decompile.DvMethodStatementBlock method), 102  
shrint() (in module androguard.decompiler.dad.opcode\_ins), 118  
shrint2addr() (in module androguard.decompiler.dad.opcode\_ins), 118  
shrintlit8() (in module androguard.decompiler.dad.opcode\_ins), 118  
shrlong() (in module androguard.decompiler.dad.opcode\_ins), 118  
shrlong2addr() (in module androguard.decompiler.dad.opcode\_ins), 118  
sign\_apk() (in module androguard.misc), 124  
simplify() (in module androguard.decompiler.dad.graph), 103  
SIZE (androguard.core.bytecodes.axml.ARSCHeader attribute), 87  
size() (androguard.core.bytecode.BuffHandle method), 95  
source() (androguard.core.bytecodes.dvm.ClassDefItem method), 38  
source() (androguard.core.bytecodes.dvm.EncodedMethod method), 54  
space() (androguard.decompiler.dad.writer.Writer method), 119  
SparseSwitch (class in androguard.core.bytecodes.dvm), 81  
sparseswitch() (in module androguard.decompiler.dad.opcode\_ins), 118  
split\_if\_nodes() (in module androguard.decompiler.dad.opcode\_ins), 103  
split\_variables() (in module androguard.decompiler.dad.dataflow), 101  
splitall() (in module androguard.core.data.data), 92  
sputobject() (in module androguard.decompiler.dad.opcode\_ins), 118  
sputwide() (in module androguard.decompiler.dad.opcode\_ins), 118  
statement\_block() (in module androguard.decompiler.dad.ast), 98  
StaticInstruction (class in androguard.decompiler.dad.basic\_blocks), 99  
StaticOperandInstruction (class in androguard.core.bytecodes.dvm), 87  
SttidExpression (class in androguard.decompiler.dad.instruction), 110  
StringAnalysis (class in androguard.core.analysis.analysis), 21  
StringBlock (class in androguard.core.bytecodes.axml), 91  
StringDataItem (class in androguard.core.bytecodes.dvm), 82  
StringIdItem (class in androguard.core.bytecodes.dvm), 83  
SUB (androguard.decompiler.dad.opcode\_ins.Op attribute), 112  
subdouble() (in module androguard.decompiler.dad.opcode\_ins), 118  
subdouble2addr() (in module androguard.decompiler.dad.opcode\_ins), 118  
subfloat() (in module androguard.decompiler.dad.opcode\_ins), 118  
subfloat2addr() (in module androguard.decompiler.dad.opcode\_ins), 118  
subint() (in module androguard.decompiler.dad.opcode\_ins), 118

subint2addr()	(in module andro-	update_attribute_with()	(andro-
guard.decompiler.dad.opcode_ins),	118	guard.decompiler.dad.basic_blocks.LoopBlock	method), 99
sublong()	(in module andro-	update_attribute_with()	(andro-
guard.decompiler.dad.opcode_ins),	118	guard.decompiler.dad.basic_blocks.SwitchBlock	method), 100
sublong2addr()	(in module andro-	update_attribute_with()	(andro-
guard.decompiler.dad.opcode_ins),	118	guard.decompiler.dad.node.Node	method),
sucs()	(androguard.decompiler.dad.graph.Graph method),	111	
103			
SV (class in androguard.core.bytecode),	95	update_chain()	(in module andro-
SVs (class in androguard.core.bytecode),	95	guard.decompiler.dad.dataflow),	101
switch_stmt()	(in module andro-	update_dom()	(in module andro-
guard.decompiler.dad.ast),	98	guard.decompiler.dad.control_flow),	101
switch_struct()	(in module andro-	ushrint()	(in module andro-
guard.decompiler.dad.control_flow),	101	guard.decompiler.dad.opcode_ins),	118
SwitchBlock (class in andro-	guard.decompiler.dad.basic_blocks),	ushrint2addr()	(in module andro-
guard.decompiler.dad.opcode_ins),	100	guard.decompiler.dad.opcode_ins),	118
SwitchExpression (class in andro-	guard.decompiler.dad.instruction),	ushrintlit8()	(in module andro-
guard.decompiler.dad.instruction),	110	guard.decompiler.dad.opcode_ins),	118
<b>T</b>		ushrlong()	(in module andro-
ThisParam (class in andro-	guard.decompiler.dad.instruction),	ushrlong2addr()	guard.decompiler.dad.opcode_ins),
110		guard.decompiler.dad.opcode_ins),	118
throw()	(in module andro-		
guard.decompiler.dad.opcode_ins),	118		
throw_stmt() (in module androguard.decompiler.dad.ast),	98		
ThrowBlock (class in andro-	guard.decompiler.dad.basic_blocks),		
100			
ThrowExpression (class in andro-	guard.decompiler.dad.instruction),		
110			
TmpBlock (class in androguard.core.bytecode),	95		
try_stmt() (in module androguard.decompiler.dad.ast),	98		
TryBlock (class in andro-	guard.decompiler.dad.basic_blocks),		
100			
TryItem (class in androguard.core.bytecodes.dvm),	83		
TypeHIdItem (class in androguard.core.bytecodes.dvm),	84		
TypeIdItem (class in androguard.core.bytecodes.dvm),	84		
TypeItem (class in androguard.core.bytecodes.dvm),	84		
TypeList (class in androguard.core.bytecodes.dvm),	85		
typen() (in module androguard.decompiler.dad.ast),	98		
<b>U</b>			
unary_postfix() (in module andro-	guard.decompiler.dad.basic_blocks.SwitchBlock	visit()	(androguard.decompiler.dad.instruction.Variable
guard.decompiler.dad.ast),	98	method),	111
unary_prefix() (in module andro-	guard.decompiler.dad.basic_blocks.ThrowBlock	var_decl()	(in module androguard.decompiler.dad.ast),
guard.decompiler.dad.ast),	98	method),	98
UnaryExpression (class in andro-	guard.decompiler.dad.basic_blocks.TryBlock	Variable (class in andro-	110
guard.decompiler.dad.instruction),	110	guard.decompiler.dad.instruction),	
Unresolved (class in androguard.core.bytecodes.dvm),	86	visit()	(androguard.decompiler.dad.instruction.ArrayLengthExpression
update_attribute_with()	(andro-	method),	103
guard.decompiler.dad.basic_blocks.CondBlock		visit()	(androguard.decompiler.dad.instruction.ArrayLoadExpression
method),	99	method),	104
		visit()	(androguard.decompiler.dad.instruction.ArrayStoreInstruction
		method),	104

visit() (androguard.decompiler.dad.instruction.AssignExpression) (androguard.decompiler.dad.instruction.SwitchExpression method), 104  
visit() (androguard.decompiler.dad.instruction.BaseClass visit() (androguard.decompiler.dad.instruction.ThisParam method), 104  
visit() (androguard.decompiler.dad.instruction.BinaryComprehension) (androguard.decompiler.dad.instruction.ThrowExpression method), 104  
visit() (androguard.decompiler.dad.instruction.BinaryExpression) (androguard.decompiler.dad.instruction.UnaryExpression method), 105  
visit() (androguard.decompiler.dad.instruction.CastExpression) (androguard.decompiler.dad.instruction.Variable method), 105  
visit() (androguard.decompiler.dad.instruction.CheckCastExpression) (androguard.decompiler.dad.writer.Writer method), 105  
visit() (androguard.decompiler.dad.instruction.ConditionalExpression) (androguard.decompiler.dad.writer.Writer method), 105  
visit() (androguard.decompiler.dad.instruction.ConditionalExpressionData) (in module androguard.decompiler.dad.ast), 98  
visit() (androguard.decompiler.dad.instruction.Constant visit\_assign() (androguard.decompiler.dad.writer.Writer method), 106  
visit() (androguard.decompiler.dad.instruction.FillArrayExpression) (androguard.decompiler.dad.writer.Writer method), 106  
visit() (androguard.decompiler.dad.instruction.FilledArrayExpression) (androguard.decompiler.dad.writer.Writer method), 106  
visit() (androguard.decompiler.dad.instruction.InstanceExpression 119  
method), 107 visit\_binary\_expression() (androguard.decompiler.dad.writer.Writer method), 107  
visit() (androguard.decompiler.dad.instruction.InstanceInstruction 119  
method), 107 guard.decompiler.dad.writer.Writer method), 107  
visit() (androguard.decompiler.dad.instruction.InvokeInstruction) (androguard.decompiler.dad.writer.Writer method), 108 visit\_cast() (androguard.decompiler.dad.writer.Writer method), 108  
visit() (androguard.decompiler.dad.instruction.IRForm visit\_catch\_node() (androguard.decompiler.dad.writer.Writer method), 107  
method), 107 guard.decompiler.dad.writer.Writer method), 107  
visit() (androguard.decompiler.dad.instruction.MonitorEnterExpression 119  
method), 108 visit\_check\_cast() (androguard.decompiler.dad.writer.Writer method), 108  
visit() (androguard.decompiler.dad.instruction.MonitorExitExpression 120  
method), 108 guard.decompiler.dad.writer.Writer method), 108  
visit() (androguard.decompiler.dad.instruction.MoveExceptionExpression) (androguard.decompiler.dad.basic\_blocks.CondBlock method), 108  
visit() (androguard.decompiler.dad.instruction.MoveExpression) (androguard.decompiler.dad.basic\_blocks.LoopBlock method), 108  
visit() (androguard.decompiler.dad.instruction.MoveResultExpression) (androguard.decompiler.dad.basic\_blocks.ShortCircuitBlock method), 109  
visit() (androguard.decompiler.dad.instruction.NewArrayExpression) (androguard.decompiler.dad.writer.Writer method), 109 visit\_cond\_expression() (androguard.decompiler.dad.writer.Writer method), 109  
visit() (androguard.decompiler.dad.instruction.NewInstance 120  
method), 109 visit\_cond\_node() (androguard.decompiler.dad.writer.Writer method), 109  
visit() (androguard.decompiler.dad.instruction.NopExpression 120  
method), 109 guard.decompiler.dad.ast.JSONWriter method), 97  
visit() (androguard.decompiler.dad.instruction.Param visit\_cond\_node() (androguard.decompiler.dad.writer.Writer method), 109  
method), 109 guard.decompiler.dad.writer.Writer method), 109  
visit() (androguard.decompiler.dad.instruction.ReturnInstruction 120  
method), 110 visit\_condz\_expression() (androguard.decompiler.dad.writer.Writer method), 110  
visit() (androguard.decompiler.dad.instruction.StaticExpression 120  
method), 110 guard.decompiler.dad.writer.Writer method), 110  
visit() (androguard.decompiler.dad.instruction.StaticInstruction) (androguard.decompiler.dad.writer.Writer method), 110 visit\_constant() (androguard.decompiler.dad.writer.Writer method), 110

visit_decl()	(androguard.decompiler.dad.instruction.Variable method),	120	guard.decompiler.dad.writer.Writer (method),	120
visit_decl()	(androguard.decompiler.dad.writer.Writer method),	120	visit_node() (androguard.decompiler.dad.ast.JSONWriter method),	97
visit_decl()	(in module androguard.decompiler.dad.ast),	98	visit_node() (androguard.decompiler.dad.writer.Writer method),	120
visit_exception()	(androguard.decompiler.dad.basic_blocks.CatchBlock method),	99	visit_nop() (androguard.decompiler.dad.writer.Writer method),	120
visit_expr()	(in module androguard.decompiler.dad.ast),	98	visit_param() (androguard.decompiler.dad.writer.Writer method),	120
visit_fill_array()	(androguard.decompiler.dad.writer.Writer method),	120	visit_put_instance() (androguard.decompiler.dad.writer.Writer method),	120
visit_filled_new_array()	(androguard.decompiler.dad.writer.Writer method),	120	visit_put_static() (androguard.decompiler.dad.writer.Writer method),	120
visit_get_instance()	(androguard.decompiler.dad.writer.Writer method),	120	visit_return() (androguard.decompiler.dad.writer.Writer method),	120
visit_get_static()	(androguard.decompiler.dad.writer.Writer method),	120	visit_return_node() (androguard.decompiler.dad.ast.JSONWriter method),	97
visit_ins()	(androguard.decompiler.dad.ast.JSONWriter method),	97	visit_return_node() (androguard.decompiler.dad.writer.Writer method),	120
visit_ins()	(androguard.decompiler.dad.writer.Writer method),	120	visit_return_void() (androguard.decompiler.dad.writer.Writer method),	120
visit_ins()	(in module androguard.decompiler.dad.ast),	98	visit_short_circuit_condition() (androguard.decompiler.dad.writer.Writer method),	120
visit_invoke()	(androguard.decompiler.dad.writer.Writer method),	120	visit_statement_node() (androguard.decompiler.dad.ast.JSONWriter method),	97
visit_loop_node()	(androguard.decompiler.dad.ast.JSONWriter method),	97	visit_statement_node() (androguard.decompiler.dad.writer.Writer method),	120
visit_loop_node()	(androguard.decompiler.dad.writer.Writer method),	120	visit_super() (androguard.decompiler.dad.writer.Writer method),	120
visit_monitor_enter()	(androguard.decompiler.dad.writer.Writer method),	120	visit_switch() (androguard.decompiler.dad.writer.Writer method),	120
visit_monitor_exit()	(androguard.decompiler.dad.writer.Writer method),	120	visit_switch_node() (androguard.decompiler.dad.ast.JSONWriter method),	97
visit_move()	(androguard.decompiler.dad.writer.Writer method),	120	visit_switch_node() (androguard.decompiler.dad.writer.Writer method),	120
visit_move_exception()	(androguard.decompiler.dad.writer.Writer method),	120	visit_this() (androguard.decompiler.dad.writer.Writer method),	120
visit_move_result()	(androguard.decompiler.dad.writer.Writer method),	120	visit_throw() (androguard.decompiler.dad.writer.Writer method),	120
visit_new()	(androguard.decompiler.dad.writer.Writer method),	120	visit_throw_node() (androguard.decompiler.dad.ast.JSONWriter method),	97
visit_new_array()	(andro-		visit_throw_node() (andro-	

guard.decompiler.dad.writer.Writer method), xorintlit8() (in module andro-  
120 guard.guard.decompiler.dad.opcode\_ins), 118  
visit\_try\_node() (andro- xorlong() (in module andro-  
guard.decompiler.dad.ast.JSONWriter method), 97 guard.guard.decompiler.dad.opcode\_ins), 119  
visit\_try\_node() (andro- xorlong2addr() (in module andro-  
guard.decompiler.dad.writer.Writer method), 120 guard.guard.decompiler.dad.opcode\_ins), 119  
visit\_unary\_expression() (andro- Y  
guard.decompiler.dad.writer.Writer method), 121 Yellow (androguard.core.androconf.Color attribute), 93  
visit\_variable() (androguard.decompiler.dad.writer.Writer method), 121  
vm2json() (in module androguard.core.bytecode), 96

## W

while\_block\_struct() (in module andro-  
guard.decompiler.dad.control\_flow), 101  
write() (androguard.decompiler.dad.writer.Writer method), 121  
write\_ext() (androguard.decompiler.dad.writer.Writer method), 121  
write\_ind() (androguard.decompiler.dad.writer.Writer method), 121  
write\_ind\_visit\_end() (andro-  
guard.decompiler.dad.writer.Writer method), 121  
write\_ind\_visit\_end\_ext() (andro-  
guard.decompiler.dad.writer.Writer method), 121  
write\_inplace\_if\_possible() (andro-  
guard.decompiler.dad.writer.Writer method), 121  
write\_inplace\_if\_possible() (in module andro-  
guard.decompiler.dad.ast), 98  
write\_method() (andro-  
guard.decompiler.dad.writer.Writer method), 121  
Writer (class in androguard.decompiler.dad.writer), 119  
writesleb128() (in module andro-  
guard.core.bytecodes.dvm), 87  
writeuleb128() (in module andro-  
guard.core.bytecodes.dvm), 87

## X

XOR (androguard.decompiler.dad.opcode\_ins.Op attribute), 112  
xorint() (in module andro-  
guard.decompiler.dad.opcode\_ins), 118  
xorint2addr() (in module andro-  
guard.decompiler.dad.opcode\_ins), 118  
xorintlit16() (in module andro-  
guard.decompiler.dad.opcode\_ins), 118